




DC Frameless Fan 120X120X25mm

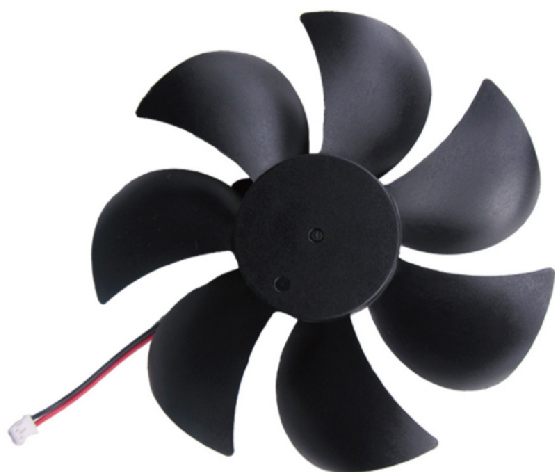

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing System : ※Sleeve · ★WRB · ◎Two Ball
軸承結構：※含油軸承 · ★專利軸承 · ◎滾珠軸承
- Unit Weight : 205g
風扇單體重量：205克

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
SFH12025LL12	◎※★	12(6.0~13.5)	0.180	2.16	1500	64.2	1.820	1.76	0.069	30.5
SFH12025L12	◎★	12(6.0~13.5)	0.250	3.00	2000	76.6	2.171	2.43	0.096	36.5
SFH12025M12	◎★	12(6.0~13.5)	0.310	3.72	2500	92.4	2.617	3.98	0.157	42.1
SFH12025H12	◎★	12(6.0~13.5)	0.450	5.40	3000	107.0	3.041	5.04	0.198	47.4
SFH12025LL24	◎★	24(18.0~26.5)	0.090	2.16	1500	64.2	1.820	1.76	0.069	30.5
SFH12025L24	◎★	24(18.0~26.5)	0.125	3.00	2000	76.6	2.171	2.43	0.096	36.5
SFH12025M24	◎★	24(18.0~26.5)	0.155	3.72	2500	92.4	2.617	3.98	0.157	42.1
SFH12025H24	◎★	24(18.0~26.5)	0.225	5.40	3000	107.0	3.041	5.04	0.198	47.4
SFH12025LL48	◎★	48(36.0~56.0)	0.045	2.16	1500	64.2	1.820	1.76	0.069	30.5
SFH12025L48	◎★	48(36.0~56.0)	0.063	3.00	2000	76.6	2.171	2.43	0.096	36.5
SFH12025M48	◎★	48(36.0~56.0)	0.078	3.72	2500	92.4	2.617	3.98	0.157	42.1
SFH12025H48	◎★	48(36.0~56.0)	0.112	5.40	3000	107.0	3.041	5.04	0.198	47.4



★產品詳細數據及功能請參閱承認書 Product have a detail in the approval sheet.

★產品規格變更不另行通知 Specifications are subject to change without notice.

⊗ Bearing System ◎ : Ball ※ : Sleeve ★ : WRB Bearing



DC Frameless Fan 120X120X25mm

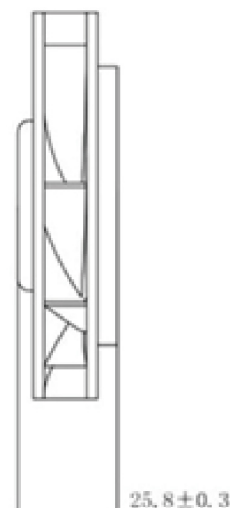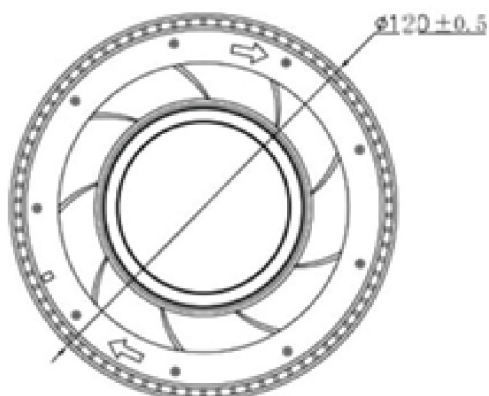

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing System : ※Sleeve · ★WRB · ◎Two Ball
軸承結構：※含油軸承 · ★專利軸承 · ◎滾珠軸承
- Unit Weight : 205g
風扇單體重量：205克

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
SFH12025LL12	◎※★	12(6.0~13.5)	0.180	2.16	1500	64.2	1.820	1.76	0.069	30.5
SFH12025L12	◎※★	12(6.0~13.5)	0.250	3.00	2000	76.6	2.171	2.43	0.096	36.5
SFH12025M12	◎※★	12(6.0~13.5)	0.310	3.72	2500	92.4	2.617	3.98	0.157	42.1
SFH12025H12	◎※★	12(6.0~13.5)	0.450	5.40	3000	107.0	3.041	5.04	0.198	47.4
SFH12025LL24	◎※★	24(18.0~26.5)	0.090	2.16	1500	64.2	1.820	1.76	0.069	30.5
SFH12025L24	◎※★	24(18.0~26.5)	0.125	3.00	2000	76.6	2.171	2.43	0.096	36.5
SFH12025M24	◎※★	24(18.0~26.5)	0.155	3.72	2500	92.4	2.617	3.98	0.157	42.1
SFH12025H24	◎※★	24(18.0~26.5)	0.225	5.40	3000	107.0	3.041	5.04	0.198	47.4
SFH12025LL48	◎※★	48(36.0~56.0)	0.045	2.16	1500	64.2	1.820	1.76	0.069	30.5
SFH12025L48	◎※★	48(36.0~56.0)	0.063	3.00	2000	76.6	2.171	2.43	0.096	36.5
SFH12025M48	◎※★	48(36.0~56.0)	0.078	3.72	2500	92.4	2.617	3.98	0.157	42.1
SFH12025H48	◎※★	48(36.0~56.0)	0.112	5.40	3000	107.0	3.041	5.04	0.198	47.4

★產品詳細數據及功能請參閱承認書 Product have a detail in the approval sheet.
★產品規格變更不另行通知 Specifications are subject to change without notice.

⊗ Bearing System ◎ : Ball ※ : Sleeve ★ : WRB Bearing