





DIMENSIONS DRAWING UNIT : mm

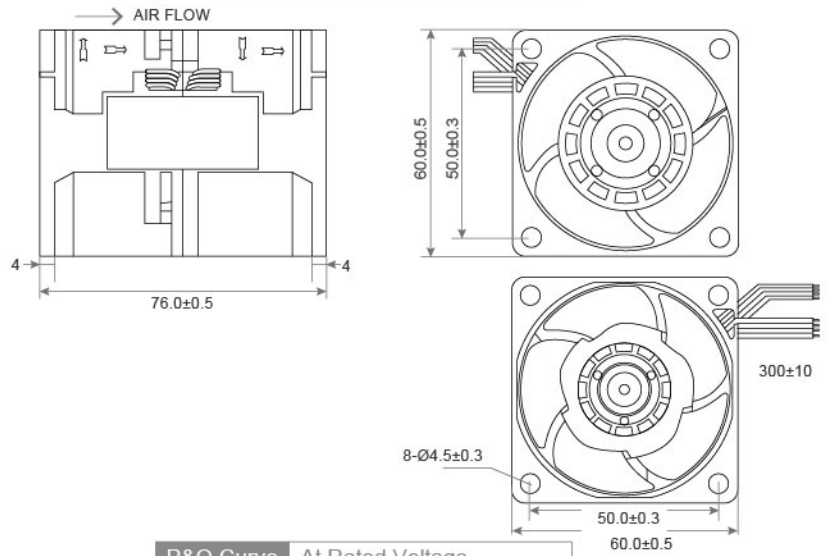

P&Q Curve At Rated Voltage

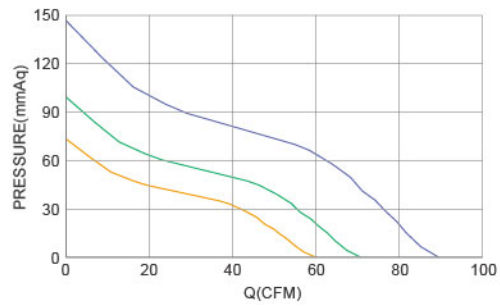

- Frame : Thermoplastic PBT UL94-V0
外框材質 : 環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質 : 環保防火PBT
- Bearing : ※ Sleeve · ★ WRB · ◎ Two Ball bearing
軸承 : ※ 含油 · ★ WRB · ◎ 滾珠軸承
- Unit Weight : 260g
風扇單體重量 : 260克

| Model No. | Bearing Type | Voltage (VDC) | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m ³ /min) | Air Pressure (mmH ₂ O) | Air Pressure (Inch H ₂ O) | Noise (dBA) |
|-------------|--------------|---------------|-------------|-----------|---------------|----------------|--------------------------------|-----------------------------------|--------------------------------------|-------------|
| TRF6076x12L | ※◎★ | 12 (9.5~13.2) | 3.75 | 45.0 | 14000 / 11000 | 60.0 | 1.70 | 73.4 | 2.9 | 69.0 |
| TRF6076x12M | ※◎★ | 12 (9.5~13.2) | 3.20 | 38.4 | 16000 / 12500 | 70.6 | 2.01 | 101.6 | 4.0 | 75.0 |
| TRF6076x12H | ※◎★ | 12 (9.5~13.2) | 3.20 | 38.4 | 20000 / 14500 | 88.6 | 2.51 | 147.3 | 5.8 | 79.0 |

◎ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. A145