

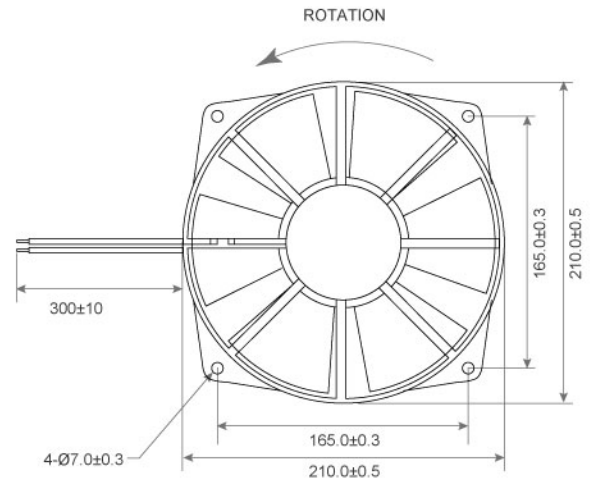


DIMENSIONS DRAWING UNIT : mm

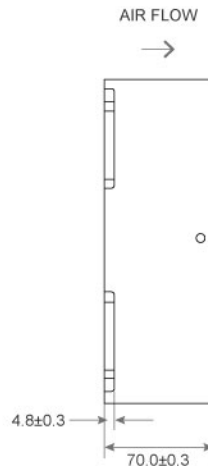

- Frame : Aluminum
外框材質：鋁框
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 1400g
風扇單體重量：1400克

P&Q Curve At Rated Voltage


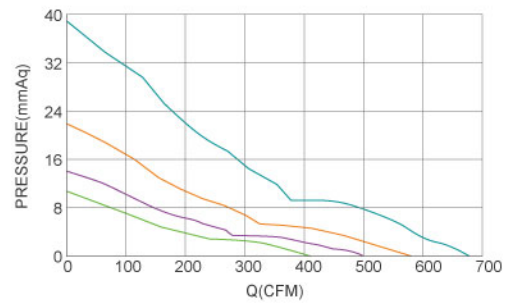


Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRS20070x12D	※◎★	12 (7.0~14.0)	0.70	8.40	1800	319.37	9.04	5.38	0.21	55.5
TRS20070x12L	※◎★	12 (7.0~14.0)	1.45	17.40	2300	408.08	11.55	8.79	0.35	62.7
TRS20070x12M	※◎★	12 (7.0~14.0)	2.40	28.80	2800	496.80	14.06	13.02	0.51	67.5
TRS20070x24D	※◎★	24 (15.0~27.0)	0.35	8.40	1800	319.37	9.04	5.38	0.21	55.5
TRS20070x24L	※◎★	24 (15.0~27.0)	0.72	17.28	2300	408.08	11.55	8.79	0.35	62.7
TRS20070x24M	※◎★	24 (15.0~27.0)	1.11	25.92	2800	496.80	14.06	13.02	0.51	67.5
TRS20070x24H	※◎★	24 (15.0~27.0)	1.95	46.80	3300	585.51	18.09	29.14	1.15	69.1
TRS20070x24VH	※◎★	24 (15.0~27.0)	3.20	76.80	3800	674.22	23.99	38.64	1.52	71.7
TRS20070x48D	※◎★	48 (35.0~57.0)	0.18	8.64	1800	319.37	9.04	5.38	0.21	55.5
TRS20070x48L	※◎★	48 (35.0~57.0)	0.36	17.28	2300	408.08	11.55	8.79	0.35	62.7
TRS20070x48M	※◎★	48 (35.0~57.0)	0.60	28.80	2800	496.80	14.06	13.02	0.51	67.5
TRS20070x48H	※◎★	48 (35.0~57.0)	1.00	48.00	3300	585.51	16.57	29.14	1.15	71.7
TRS20070x48VH	※◎★	48 (35.0~57.0)	1.60	76.80	3800	674.22	19.08	38.64	1.52	69.1

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball


★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information. ★產品規格變更不另行通知 Specifications are subject to change without notice. A136

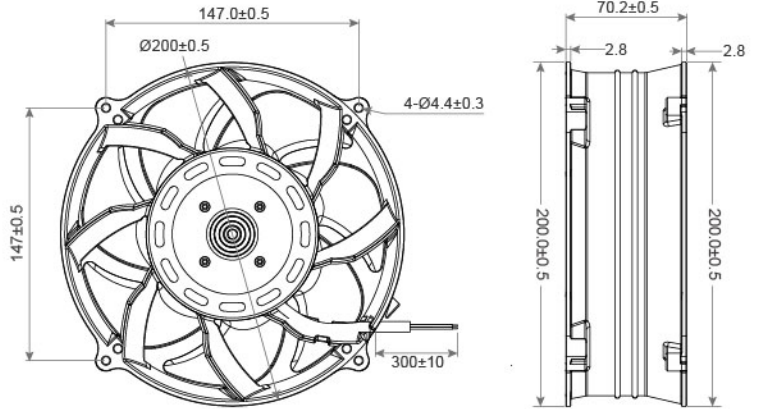

- Frame : Aluminum
外框材質：鋁框
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball Bearing
軸承：◎滾珠軸承
- Unit Weight : 1760g
風扇單體重量：1760克

P&Q Curve At Rated Voltage

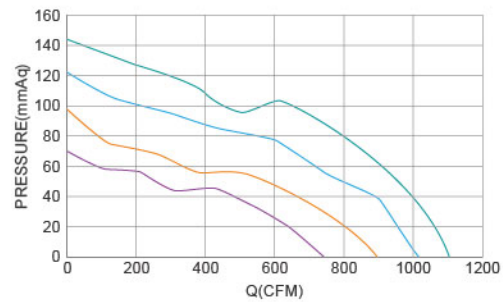

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRF20070x12L	◎	12 (9.5~13.5)	8.2	98.4	4600	612	17.38	48.51	1.91	62
TRF20070x24L	◎	24 (18.5~30.0)	4.1	98.4	4600	612	17.38	48.51	1.91	62
TRF20070x24M	◎	24 (18.5~30.0)	6.1	170.8	5600	753	21.30	72.51	2.85	66
TRF20070x24H	◎	24 (18.5~30.0)	13.6	326.4	6800	898	25.50	88.03	3.46	73
TRF20070x48L	◎	48 (36.0~72.0)	2.05	98.4	4600	612	17.38	48.51	1.91	62
TRF20070x48M	◎	48 (36.0~72.0)	3.6	172.8	5600	753	21.30	72.51	2.85	66
TRF20070x48H	◎	48 (36.0~72.0)	6.8	326.4	6800	898	25.50	88.03	3.46	73
TRF20070x48VH	◎	48 (36.0~72.0)	8.1	388.8	7300	1010	28.60	123.69	4.87	76
TRF20070x48SH	◎	48 (36.0~72.0)	12.5	600.0	8000	1112	31.60	142.76	5.62	81

⊗ Bearing System ※ Sleeve ★ WRB ◎ Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. A134