


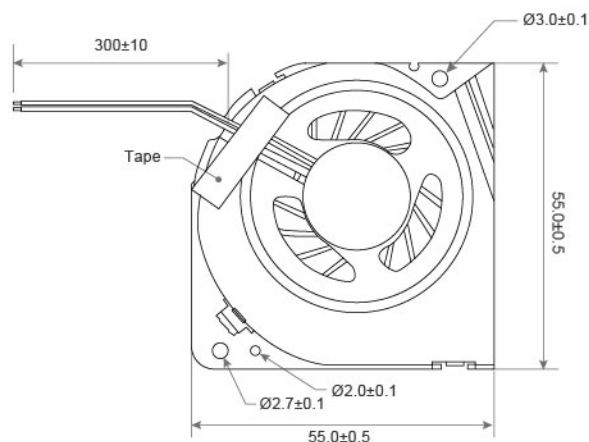




- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 17.5g
風扇單體重量：17.5克



P&Q Curve At Rated Voltage

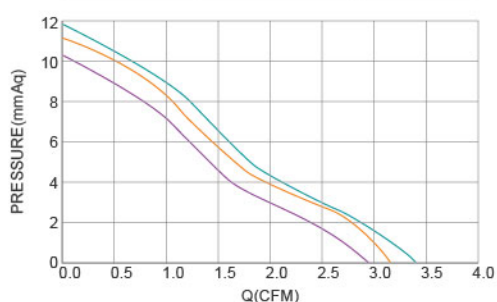

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRN5508x05L	※◎★	5 (3.6~6.8)	0.79	3.96	4800	2.94	0.083	10.20	0.40	25.8
TRN5508x05M	※◎★	5 (3.6~6.8)	0.84	4.20	5200	3.18	0.090	11.05	0.44	27.9
TRN5508x05H	※◎★	5 (3.6~6.8)	0.89	4.44	5600	3.42	0.097	11.90	0.47	30.1
TRN5508x12L	※◎★	12 (7.0~13.8)	0.33	3.96	4800	2.94	0.083	10.20	0.40	25.8
TRN5508x12M	※◎★	12 (7.0~13.8)	0.35	4.20	5200	3.18	0.090	11.05	0.44	27.9
TRN5508x12H	※◎★	12 (7.0~13.8)	0.37	4.44	5600	3.42	0.097	11.90	0.47	30.1