



DC Frameless Fan 50X50X10mm



- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing System : ※Sleeve · ★WRB · ◎Two Ball
軸承結構：※含油軸承 · ★專利軸承 · ◎滾珠軸承
- Unit Weight : 18g
風扇單體重量：18克

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow		Air Pressure		Noise (dBA)
						(CFM)	(m ³ /min)	(mmH ₂ O)	(Inch H ₂ O)	
SFH5010L05	◎※★	5(3.5~6.8)	0.13	1.05	4000	8.87	0.25	2.27	0.09	21.1
SFH5010M05	◎※★	5(3.5~6.8)	0.17	0.85	5000	11.23	0.32	3.80	0.15	28.5
SFH5010H05	◎※★	5(5.0~8.4)	0.23	1.15	6000	13.61	0.38	5.89	0.23	32.6
SFH5010L12	◎※★	12(6.0~13.5)	0.07	0.84	4000	8.87	0.25	2.87	0.09	21.1
SFH5010M12	◎※★	12(6.0~13.5)	0.10	1.20	4000	11.23	0.32	3.80	0.15	28.5
SFH5010H12	◎※★	12(6.0~13.5)	0.14	1.68	6000	13.61	0.38	5.89	0.23	32.6
SFH5010HH12	◎※★	12(6.0~13.5)	0.22	2.64	6500	14.74	0.42	6.38	0.25	34.2
SFH5010L24	◎※★	24(18.0~26.5)	0.03	0.72	3500	8.32	0.21	1.80	0.05	18.5
SFH5010M24	◎※★	24(18.0~26.5)	0.05	1.20	4000	8.87	0.25	2.27	0.09	21.1
SFH5010H24	◎※★	24(18.0~26.5)	0.08	1.92	6000	11.23	0.38	3.80	0.23	28.5
SFH5010HH24	◎※★	24(18.0~26.5)	0.12	2.88	6500	13.61	0.42	5.89	0.25	32.6


★產品詳細數據及功能請參閱承認書 Product have a detail in the approval sheet.

★產品規格變更不另行通知 Specifications are subject to change without notice.

⊗ Bearing System ◎ : Ball ※ : Sleeve ★ : WRB Bearing



DC Frameless Fan 50X50X10mm

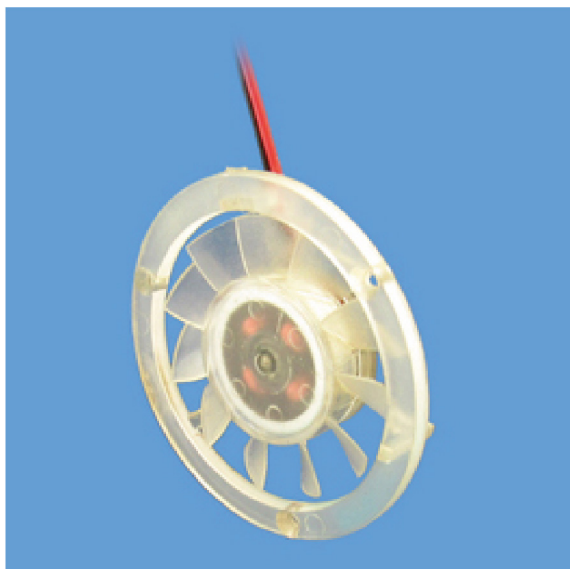

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing System : ※Sleeve · ★WRB · ◎Two Ball
軸承結構：※含油軸承 · ★專利軸承 · ◎滾珠軸承
- Unit Weight : 18g
風扇單體重量：18克

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	(m ³ /min)	Air Pressure (mmH ₂ O)	(Inch H ₂ O)	Noise (dBA)
SFH5010L05	◎※★	5(3.5~6.8)	0.13	1.05	4000	8.87	0.25	2.27	0.09	21.1
SFH5010M05	◎※★	5(3.5~6.8)	0.17	0.85	5000	11.23	0.32	3.80	0.15	28.5
SFH5010H05	◎※★	5(5.0~8.4)	0.23	1.15	6000	13.61	0.38	5.89	0.23	32.6
SFH5010L12	◎※★	12(6.0~13.5)	0.07	0.84	4000	8.87	0.25	2.87	0.09	21.1
SFH5010M12	◎※★	12(6.0~13.5)	0.10	1.20	4000	11.23	0.32	3.80	0.15	28.5
SFH5010H12	◎※★	12(6.0~13.5)	0.14	1.68	6000	13.61	0.38	5.89	0.23	32.6
SFH5010HH12	◎※★	12(6.0~13.5)	0.22	2.64	6500	14.74	0.42	6.38	0.25	34.2
SFH5010L24	◎※★	24(18.0~26.5)	0.03	0.72	3500	8.32	0.21	1.80	0.05	18.5
SFH5010M24	◎※★	24(18.0~26.5)	0.05	1.20	4000	8.87	0.25	2.27	0.09	21.1
SFH5010H24	◎※★	24(18.0~26.5)	0.08	1.92	6000	11.23	0.38	3.80	0.23	28.5
SFH5010HH24	◎※★	24(18.0~26.5)	0.12	2.88	6500	13.61	0.42	5.89	0.25	32.6

★產品詳細數據及功能請參閱承認書 Product have a detail in the approval sheet.

★產品規格變更不另行通知 Specifications are subject to change without notice.

✕ Bearing System ◎ : Ball ※ : Sleeve ★ : WRB Bearing