



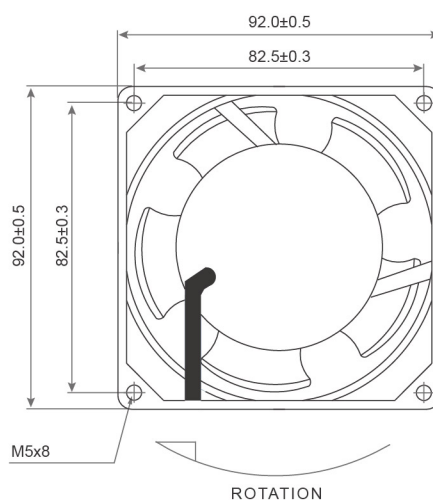


AC Axial Fan SA9225 SERIES 92X92X25mm

DIMENSIONS DRAWING UNIT : mm

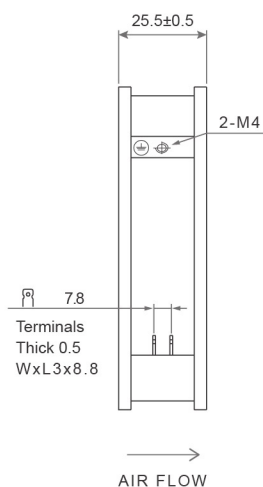

- Frame : Aluminum Housing
外框材質：鋁框
- Impeller : Thermoplastic PBT UL 94-V0
扇葉材質：環保防火PBT UL94-V0
- Ingress Protection : Optional IP55 or IP68
防護等級：可選擇 IP55或IP68
- Weight : 250g
風扇單體重量：250克

P&Q Curve At Rated Voltage

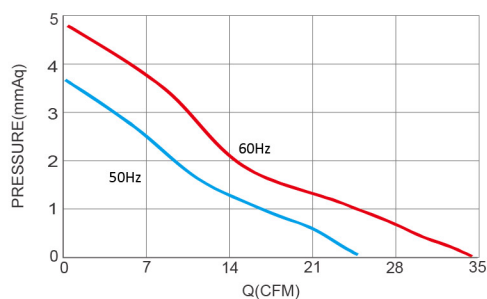


Model No.	Bearing Type	Voltage (VAC)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow		Air Pressure		Noise (dBA)
							(CFM)	(m ³ /min)	(mmH ₂ O)	(Inch H ₂ O)	
SA9225B1Hx	◎	115	50/60	0.18/0.15	15.5/12.3	2600/3100	25/34	0.71/0.96	3.5/4.8	0.14/0.19	34/37
SA9225B1Mx	◎	115	50/60	0.06/0.05	5.3/ 4.3	2400/2600	24/29	0.68/0.82	2.7/3.1	0.11/0.12	32/34
SA9225B1Lx	◎	115	50/60	0.04/0.04	4.1/ 3.7	2200/2200	21/21	0.59/0.59	2.1/1.7	0.08/0.07	28/28
SA9225S1Hx	※	115	50/60	0.18/0.15	15.6/12.7	2500/3000	24/32	0.68/0.90	3.3/4.5	0.13/0.18	33/36
SA9225S1Mx	※	115	50/60	0.09/0.08	7.9/ 6.4	2400/2700	23/28	0.65/0.80	3.1/3.2	0.12/0.13	32/34
SA9225S1Lx	※	115	50/60	0.06/0.05	5.3/ 4.3	2300/2300	22/22	0.62/0.62	2.5/2.0	0.10/0.08	29/29
SA9225B2Hx	◎	220-240	50/60	0.07/0.06	12.0/10.0	2600/3050	25/34	0.71/0.96	3.6/4.5	0.14/0.18	34/37
SA9225B2Mx	◎	220-240	50/60	0.05/0.04	8.0/ 6.4	2300/2500	24/24	0.68/0.68	2.5/2.7	0.10/0.11	31/33
SA9225B2Lx	◎	220-240	50/60	0.03/0.02	5.0/ 4.0	2100/2000	20/20	0.57/0.57	2.0/1.6	0.08/0.06	28/27
SA9225S2Hx	※	220-240	50/60	0.07/0.06	12.0/10.0	2500/2850	25/29	0.71/0.82	3.2/3.9	0.13/0.15	33/36
SA9225S2Mx	※	220-240	50/60	0.05/0.04	9.0/ 7.3	2300/2400	25/25	1.20/1.08	2.6/2.4	0.10/0.09	31/32
SA9225S2Lx	※	220-240	50/60	0.04/0.03	8.0/ 6.4	2100/2100	20/20	0.57/0.57	1.9/1.5	0.07/0.06	28/28



⊗ : Bearing System ※ : Sleeve ★ : WRB Bearing ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 If you need another RPM or Voltage or Functions which one is not in the list, please contact us.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.




DIMENSIONS DRAWING UNIT : mm

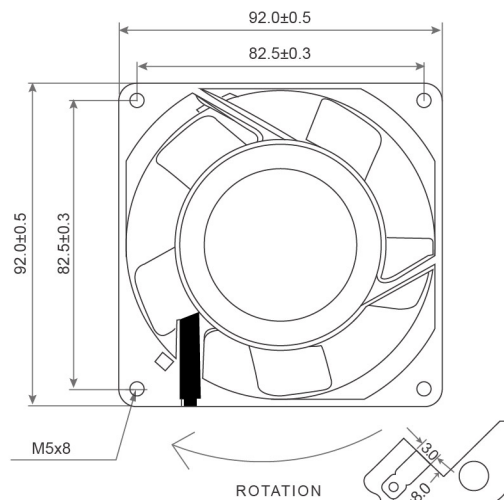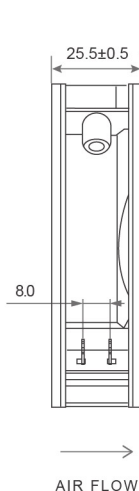

- Frame : Aluminum Housing
外框材質：鋁框
- Impeller : Thermoplastic PBT UL 94-V0
扇葉材質：環保防火PBT UL94-V0
- Ingress Protection : Optional IP55 or IP68
防護等級：可選擇 IP55或IP68
- Weight : 260g
風扇單體重量：260克

P&Q Curve At Rated Voltage

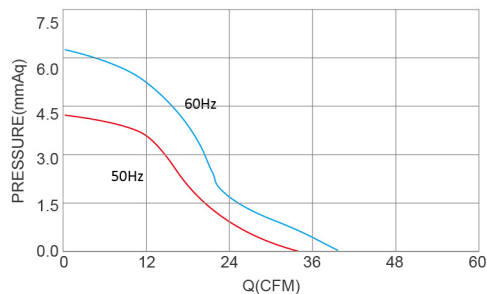

Model No.	Bearing Type	Voltage (VAC)	Frequency (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow		Air Pressure		Noise (dBA)
							(CFM)	(m³/min)	(mmH₂O)	(Inch H₂O)	
SA9225B1Hx	◎	115	50/60	0.18/0.14	14.0/10.0	2600/3000	33/40	0.93/1.13	4.2/6.1	0.17/0.24	32/46
SA9225B2Hx	◎	220-240	50/60	0.09/0.07	14.0/10.0	2600/3000	33/40	0.93/1.13	4.2/6.1	0.17/0.24	32/46

⊗ : Bearing System ※ : Sleeve ★ : WRB Bearing ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 If you need another RPM or Voltage or Functions which one is not in the list, please contact us.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.