





DIMENSIONS DRAWING UNIT : mm

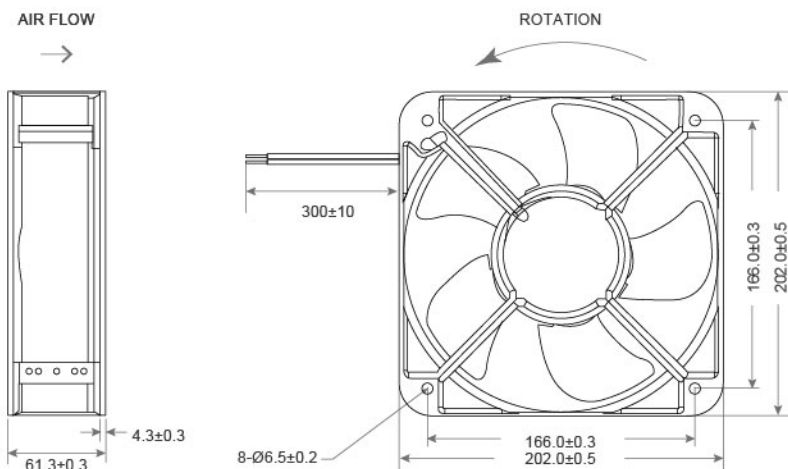

- Frame : Aluminum
外框材質：鋁框
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 1250g
風扇單體重量：1250克

P&Q Curve At Rated Voltage

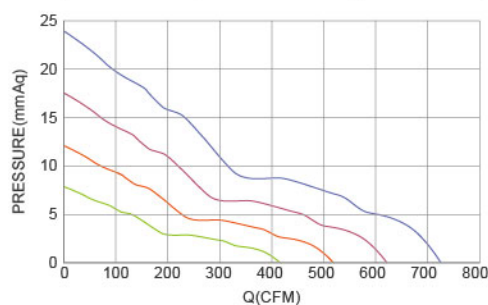

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRS20060x12L	※◎★	12 (7.0~14.0)	0.75	9.00	1500	307.65	8.71	4.37	0.17	44.50
TRS20060x12M	※◎★	12 (7.0~14.0)	1.16	13.92	2000	410.21	11.61	7.77	0.31	52.30
TRS20060x12H	※◎★	12 (7.0~14.0)	2.24	26.88	2500	512.76	14.51	12.14	0.48	58.60
TRS20060x24L	※◎★	24 (15.0~27.0)	0.28	6.72	1500	307.65	8.71	4.37	0.17	44.50
TRS20060x24M	※◎★	24 (15.0~27.0)	0.58	13.92	2000	410.21	11.61	7.77	0.31	52.30
TRS20060x24H	※◎★	24 (15.0~27.0)	1.10	26.40	2500	512.76	14.51	12.14	0.48	58.60
TRS20060x24VH	※◎★	24 (15.0~27.0)	2.10	50.40	3000	615.31	17.41	17.48	0.69	64.80
TRS20060x24SH	※◎★	24 (15.0~27.0)	3.43	80.16	3500	717.86	20.32	23.80	0.94	69.10
TRS20060x48L	※◎★	48 (35.0~57.0)	0.14	6.72	1500	307.65	8.71	4.37	0.17	44.50
TRS20060x48M	※◎★	48 (35.0~57.0)	0.29	13.92	2000	410.21	11.61	7.77	0.31	52.30
TRS20060x48H	※◎★	48 (35.0~57.0)	0.56	26.88	2500	512.76	14.51	12.14	0.48	58.60
TRS20060x48VH	※◎★	48 (35.0~57.0)	1.05	50.40	3000	615.31	17.41	17.48	0.69	64.80
TRS20060x48SH	※◎★	48 (35.0~57.0)	1.56	74.88	3500	717.86	20.32	23.80	0.94	69.10