


- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 50g
風扇單體重量：50克

P&Q Curve At Rated Voltage

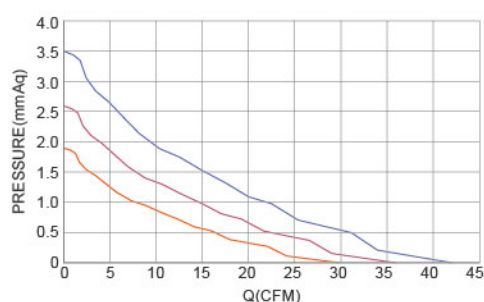

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRS9015x05D	※★◎	5 (4.0~6.0)	0.17	0.85	2000	23.99	0.68	1.15	0.05	27.6
TRS9015x05L	※★◎	5 (4.0~6.0)	0.24	1.20	2500	29.99	0.85	1.80	0.07	31.4
TRS9015x12D	※★◎	12 (7.0~14.0)	0.07	0.84	2000	23.99	0.68	1.15	0.05	27.6
TRS9015x12L	※★◎	12 (7.0~14.0)	0.10	1.20	2500	29.99	0.85	1.80	0.07	31.4
TRS9015x12M	※★◎	12 (7.0~14.0)	0.17	2.04	3000	35.99	1.02	2.59	0.10	34.5
TRS9015x12H	※★◎	12 (7.0~14.0)	0.26	3.12	3500	41.99	1.19	3.52	0.14	37.5
TRS9015x24M	※★◎	24 (15.0~27.0)	0.05	1.20	2500	29.99	0.85	1.80	0.07	31.4
TRS9015x24H	※★◎	24 (15.0~27.0)	0.08	1.92	3000	35.99	1.02	2.59	0.10	34.5
TRS9015x24VH	※★◎	24 (15.0~27.0)	0.13	3.12	3500	41.99	1.19	3.52	0.14	37.5