


DC High Pressure Micro Blower

SBA8060 SERIES 80X77X60mm





- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball bearing
軸承：◎滾珠軸承



P&Q Curve At Rated Voltage

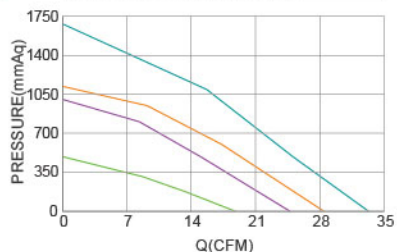

DIMENSIONS DRAWING UNIT : mm

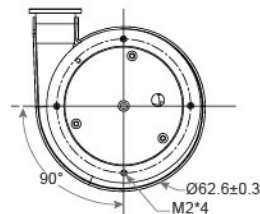

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
SBA8060B24L	◎	24(18.0~26.5)	1.85	44.4	25000	18.4	0.515	497.8	19.6	68.4
SBA8060B24M	◎	24(18.0~26.5)	4.30	103.2	35000	25.4	0.719	1009.5	39.7	70.9
SBA8060B24M-02	◎	24(18.0~26.5)	5.40	129.6	37000	28.1	0.795	1119.5	44.1	70.9
SBA8060B24H	◎	24(18.0~26.5)	8.50	204.0	44000	33.8	0.957	1681.3	66.2	84.3