

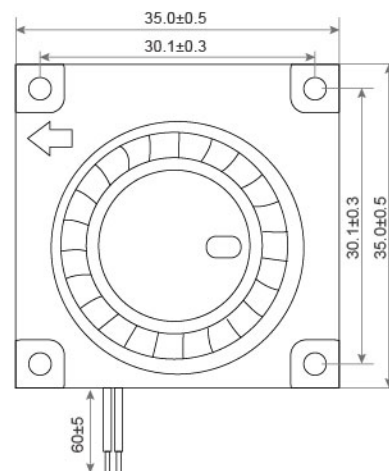





- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 8.5g
風扇單體重量：8.5克

P&Q Curve At Rated Voltage

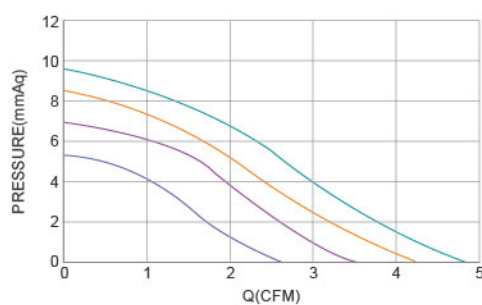

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRB3510x05D	◎※★	5 (3.6~6.8)	0.12	0.6	6000	1.42	0.040	3.62	0.143	27.5
TRB3510x05L	◎※★	5 (3.6~6.8)	0.14	0.7	7000	1.60	0.045	5.20	0.205	31.6
TRB3510x05M	◎※★	5 (3.6~6.8)	0.18	0.9	8000	1.86	0.053	6.92	0.272	34.9
TRB3510x05H	◎※★	5 (3.6~6.8)	0.22	1.1	9000	2.14	0.061	9.10	0.358	37.4
TRB3510x05VH	◎※★	5 (3.6~6.8)	0.28	1.4	10000	2.38	0.067	11.58	0.456	40.0
TRB3510x12D	◎※★	12 (6.0~18.0)	0.05	0.6	6000	1.42	0.040	3.62	0.143	27.5
TRB3510x12L	◎※★	12 (7.0~18.0)	0.06	0.7	7000	1.60	0.045	5.20	0.205	31.6
TRB3510x12M	◎※★	12 (7.0~13.5)	0.08	0.9	8000	1.86	0.053	6.92	0.272	34.9
TRB3510x12H	◎※★	12 (7.0~13.5)	0.09	1.1	9000	2.14	0.061	9.10	0.358	37.4
TRB3510x12VH	◎※★	12 (7.0~13.5)	0.12	1.4	10000	2.38	0.067	11.58	0.456	40.0

⊗ Bearing System ※ : Sleeve ★ : WRB Bearing ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.