


- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ★WRB · ◎Two Ball bearing  
軸承：★WRB · ◎滾珠軸承
- Unit Weight : 26g  
風扇單體重量：26克

P&Q Curve At Rated Voltage

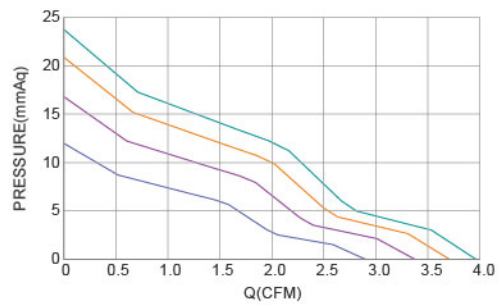

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m <sup>3</sup> /min)	Air Pressure (mmH <sub>2</sub> O)	Air Pressure (Inch H <sub>2</sub> O)	Noise (dBA)
TRB4010x05L	★◎	5 (4.0~5.5)	0.12	0.60	5700	2.56	0.07	9.88	0.39	35.2
TRB4010x05M	★◎	5 (4.0~5.5)	0.17	0.85	6500	2.92	0.08	12.84	0.51	38.7
TRB4010x05H	★◎	5 (4.0~5.5)	0.20	1.00	7500	3.37	0.10	17.10	0.67	40.3
TRB4010x12M	★◎	12 (7.0~14.0)	0.09	1.08	6500	2.92	0.08	12.84	0.51	38.7
TRB4010x12H	★◎	12 (7.0~14.0)	0.10	1.20	7500	3.37	0.1	17.10	0.67	40.3
TRB4010x12VH	★◎	12 (7.0~14.0)	0.12	1.44	8300	3.73	0.11	20.94	0.82	43.5
TRB4010x12SH	★◎	12 (7.0~14.0)	0.15	1.80	8800	3.96	0.11	23.54	0.93	45.2
TRB4010x24H	★◎	24 (15.0~27.0)	0.08	1.92	8300	3.73	0.11	20.94	0.82	43.5
TRB4010x24SH	★◎	24 (15.0~27.0)	0.08	1.92	8800	3.96	0.11	23.54	0.93	45.2

⊗ Bearing System ※ : Sleeve ★ : WRB Bearing ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.