

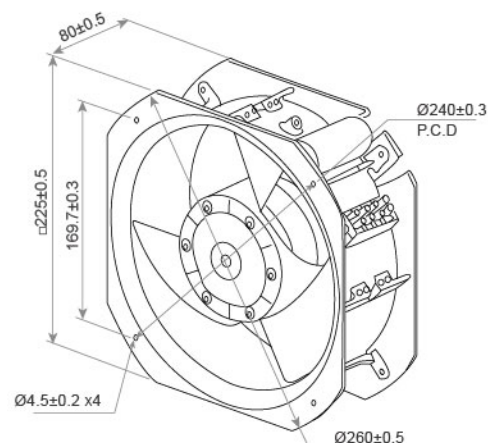


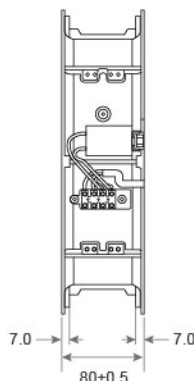

- Frame : Aluminum  
外框材質：鋁框
- Impeller : Metal  
扇葉材質：金屬葉
- Ingress Protection : Optional IP54 or IP56  
防護等級：可選擇 IP54或IP56
- Weight : 2750g  
風扇單體重量：2750克



P&Q Curve At Rated Voltage

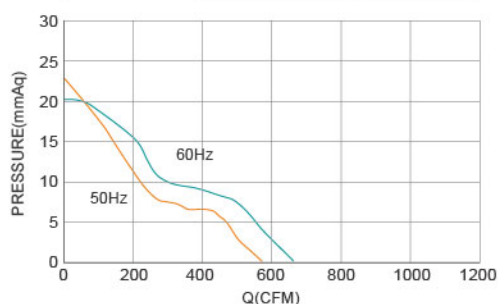

| Model No.        | Bearing Type | Voltage (VAC) | Frequency (Hz) | Current (A) | Power (W) | Speed (RPM) | Air Flow  |             | Air Pressure |             | Noise (dBA) |
|------------------|--------------|---------------|----------------|-------------|-----------|-------------|-----------|-------------|--------------|-------------|-------------|
|                  |              |               |                |             |           |             | (CFM)     | (m³/min)    | (mmH₂O)      | (Inch H₂O)  |             |
| SDA22580B1HK     | ◎            | 115           | 50/60          | 0.61 / 0.62 | 53 / 68   | 2800 / 3200 | 580 / 670 | 16.4 / 19.0 | 23.5 / 20.5  | 0.93 / 0.81 | 68 / 71     |
| SDA22580B2HK     | ◎            | 230           | 50/60          | 0.26 / 0.31 | 53 / 68   | 2800 / 3200 | 580 / 670 | 16.4 / 19.0 | 23.5 / 20.5  | 0.93 / 0.81 | 68 / 71     |
| SDA22580B2HK(3ø) | ◎            | 230           | 50/60          | 0.28 / 0.26 | 49 / 65   | 2800 / 3200 | 590 / 670 | 16.7 / 19.0 | 23.4 / 26.8  | 0.92 / 1.06 | 68 / 71     |
| SDA22580B3HK(3ø) | ◎            | 380           | 50/60          | 0.18 / 0.16 | 56 / 70   | 2800 / 3250 | 590 / 670 | 16.7 / 19.0 | 23.4 / 26.8  | 0.92 / 1.06 | 68 / 71     |
| SDA22580B3HK(3ø) | ◎            | 440           | 50/60          | 0.22 / 0.18 | 69 / 78   | 2850 / 3300 | 600 / 690 | 17.0 / 19.5 | 23.6 / 27.4  | 0.93 / 1.08 | 69 / 72     |
| SDA22580B4HK(3ø) | ◎            | 480           | 50/60          | 0.08 / 0.09 | 43 / 60   | 2750 / 3100 | 580 / 650 | 16.4 / 18.4 | 23.0 / 25.8  | 0.91 / 1.02 | 67 / 70     |


Type X could be T (Terminals) or L (Lead Wire) ◎ : Ball ※ : Sleeve

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 If you need another RPM or Voltage or Functions which one is not in the list, please contact us.

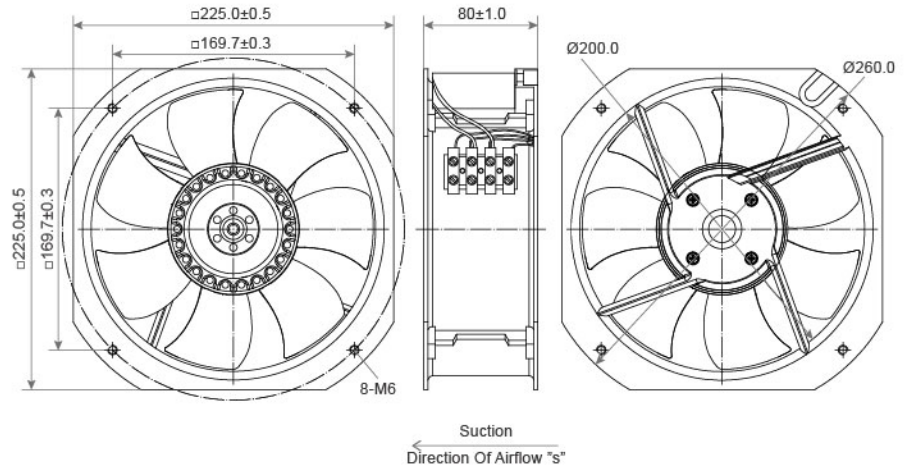

- Frame : Aluminum  
外框材質：鋁框
- Impeller : Metal  
扇葉材質：金屬葉
- Ingress Protection : IP44  
防護等級：IP44
- Weight : 2000g  
風扇單體重量：2000克

P&Q Curve At Rated Voltage

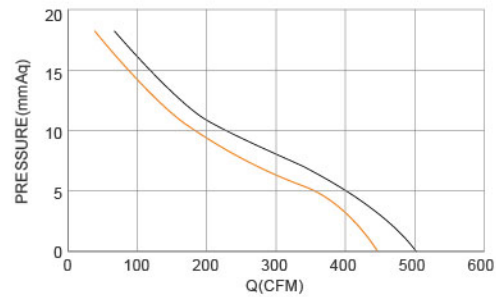

| Model No.      | Bearing Type | Voltage (VAC) | Frequency (Hz) | Current (A) | Power (W) | Speed (RPM) | Air Flow  |                       | Air Pressure         |                         | Noise (dBA) |
|----------------|--------------|---------------|----------------|-------------|-----------|-------------|-----------|-----------------------|----------------------|-------------------------|-------------|
|                |              |               |                |             |           |             | (CFM)     | (m <sup>3</sup> /min) | (mmH <sub>2</sub> O) | (Inch H <sub>2</sub> O) |             |
| SDA22580B2ML.U | ◎            | 220 / 230     | 50 / 60        | 0.17 / 0.16 | 60 / 80   | 2300 / 2600 | 443 / 501 | 12.52 / 14.20         | 18.29                | 0.72                    | 52 / 54     |
| SDA22580B3HL.U | ◎            | 380 / 400     | 50 / 60        | 0.17 / 0.16 | 60 / 80   | 2300 / 2600 | 443 / 501 | 12.52 / 14.20         | 18.29                | 0.72                    | 52 / 54     |

Type X could be ① (Terminals) or ② (Lead Wire) ◎ : Ball ※ : Sleeve

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 If you need another RPM or Voltage or Functions which one is not in the list, please contact us.  
★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.