




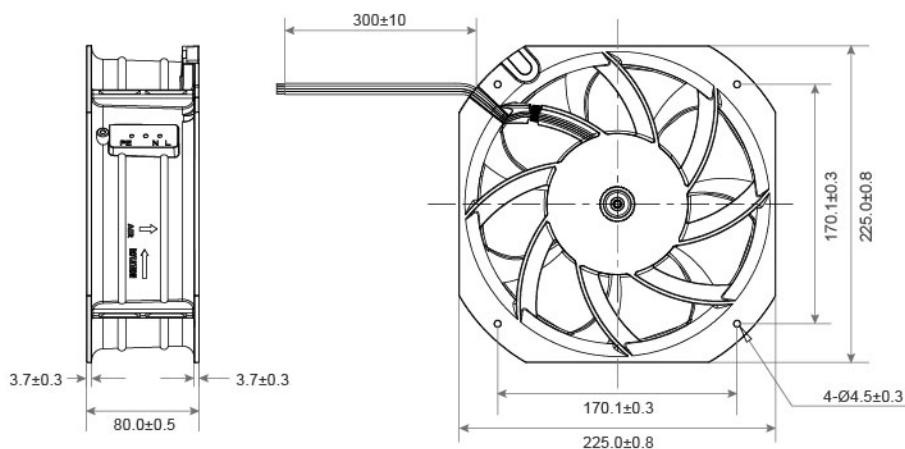


- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball Bearing
軸承：◎滾珠軸承
- Unit Weight : 1290g
風扇單體重量：1290克

P&Q Curve At Rated Voltage

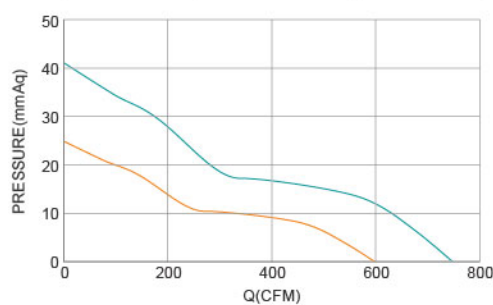


Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRF22580B12L	◎	12 (8.5~13.5)	4.16	50.0	3200	599	17.01	26.67	1.05	59
TRF22580B24L	◎	24 (14.5~27.5)	2.1	50.0	3200	599	17.01	26.67	1.05	59
TRF22580B24M	◎	24 (14.5~27.5)	3.8	91.2	4000	745	21.16	40.64	1.60	63
TRF22580B48L	◎	48 (36.0~55.0)	1.05	50.0	3200	599	17.01	26.67	1.05	59
TRF22580B48M	◎	48 (36.0~55.0)	1.9	91.2	4000	745	21.16	40.64	1.60	63

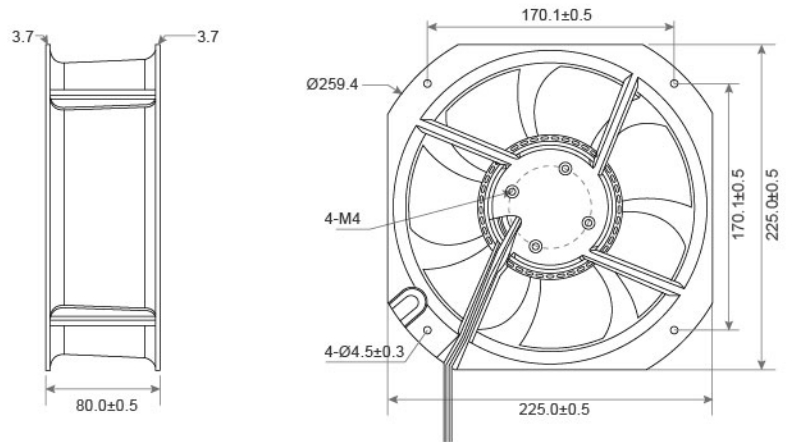

- Frame : Aluminum
外框材質：鋁框
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball Bearing
軸承：◎滾珠軸承
- Unit Weight : 2100g
風扇單體重量：2100克

P&Q Curve At Rated Voltage

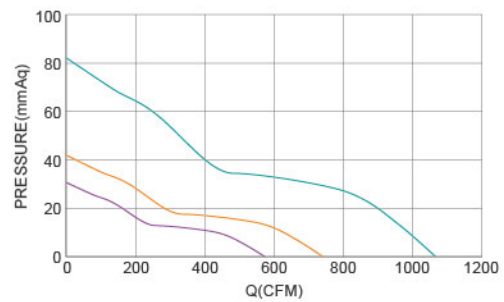




Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRF22580B12L	◎	12 (8.5~13.5)	4.16	50.0	3000	588	16.69	30.39	1.2	59.0
TRF22580B24L	◎	24 (14.5~27.5)	2.10	50.0	3000	588	16.69	30.39	1.2	59.0
TRF22580B24M	◎	24 (14.5~27.5)	3.12	75.0	4000	745	21.16	40.58	1.6	64.0
TRF22580B24H	◎	24 (14.5~27.5)	9.20	220.8	5300	1055	29.96	81.17	3.2	72.0
TRF22580B48L	◎	48 (29.0~55.0)	1.04	50.0	3000	588	16.69	30.39	1.2	59.0
TRF22580B48M	◎	48 (29.0~55.0)	1.56	75.0	4000	745	21.16	40.58	1.6	64.0
TRF22580B48H	◎	48 (29.0~55.0)	4.60	220.8	5300	1055	29.96	81.17	3.2	72.0

DC Axial Fan

TRL22580 SERIES 225X225X80mm



- Frame : Aluminum
外框材質：鋁框
- Impeller : Metal
扇葉材質：金屬葉
- Bearing : ◎Two Ball bearing
軸承：◎滾珠軸承
- Ingress Protection : Optional IP54 or IP56
防護等級：可選擇 IP54 or IP56

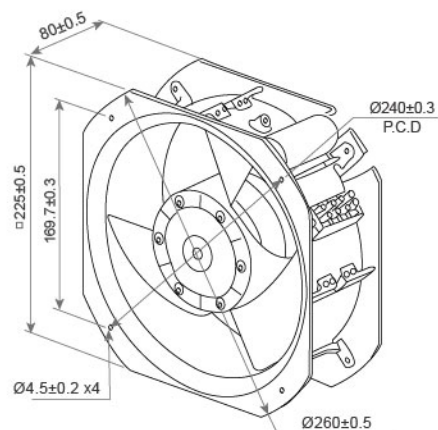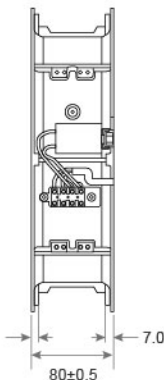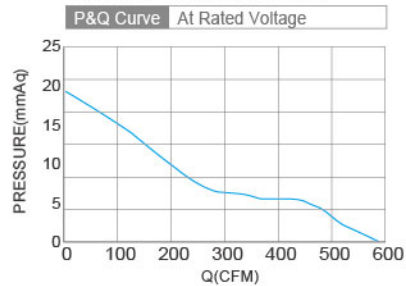




Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRL22580B24SD.M	◎	24	2.20	52.8	2800	580.0	16.41	18.034	0.71	67.0
TRL22580B48SD.M	◎	48	1.10	52.8	2800	580.0	16.41	18.034	0.71	67.0

DC Axial Fan

SDA3P200 SERIES 225X225X80mm



- Frame : Sheet Aluminum
外框材質：薄鋼板
- Impeller : Sheet Steel
扇葉材質：薄鋼板
- Bearing : ◎Two Ball bearing
軸承：◎滾珠軸承
- Ingress Protection : IP42
防護等級：IP42

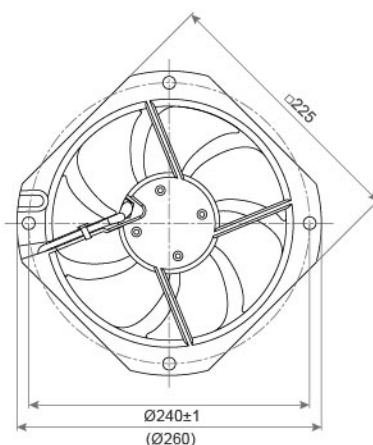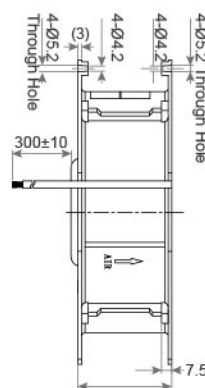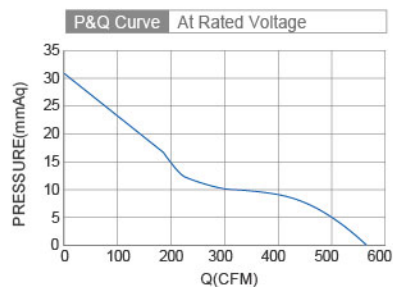

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
SDA3P200-DC092-A2	◎	24	2.30	55.0	3000	558.6	15.9	30.59	1.21	60.0
SDA3P200-DC092-A4	◎	48	1.15	55.0	3000	558.6	15.9	30.59	1.21	60.0
SDA3P200-DC092-A3	◎	310	0.17	55.0	3000	558.6	15.9	30.59	1.21	60.0

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A139★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.