

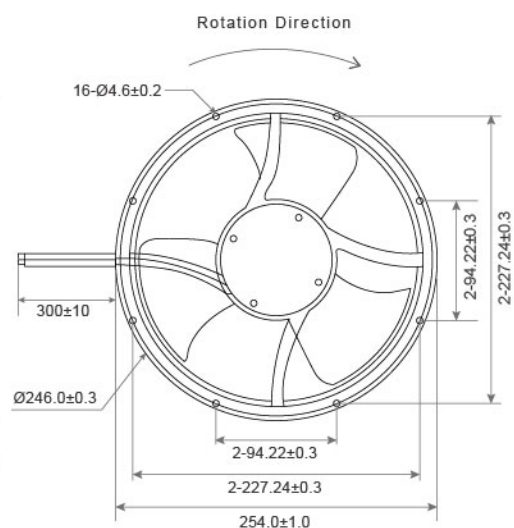


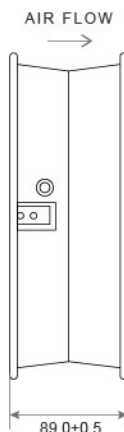


- Frame : Aluminum  
外框材質：鋁框
- Impeller : Metal  
扇葉材質：金屬葉
- Bearing : ◎Two Ball bearing  
軸承：◎滾珠軸承
- Ingress Protection : Optional IP54 or IP56  
防護等級：可選擇 IP54 or IP56

P&Q Curve At Rated Voltage

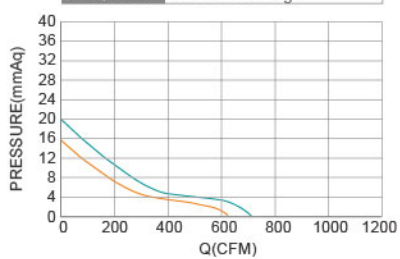


| Model No.       | Bearing Type | Voltage (VDC) | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m <sup>3</sup> /min) | Air Pressure (mmH <sub>2</sub> O) | Air Pressure (Inch H <sub>2</sub> O) | Noise (dBA) |
|-----------------|--------------|---------------|-------------|-----------|-------------|----------------|--------------------------------|-----------------------------------|--------------------------------------|-------------|
| TRL25489B24SD.M | ◎            | 24            | 2.02        | 48.48     | 2800        | 784.0          | 22.19                          | 14.73                             | 0.58                                 | 60.0        |
| TRL25489B48SD.M | ◎            | 48            | 1.36        | 65.28     | 2800        | 784.0          | 22.19                          | 14.73                             | 0.58                                 | 60.0        |

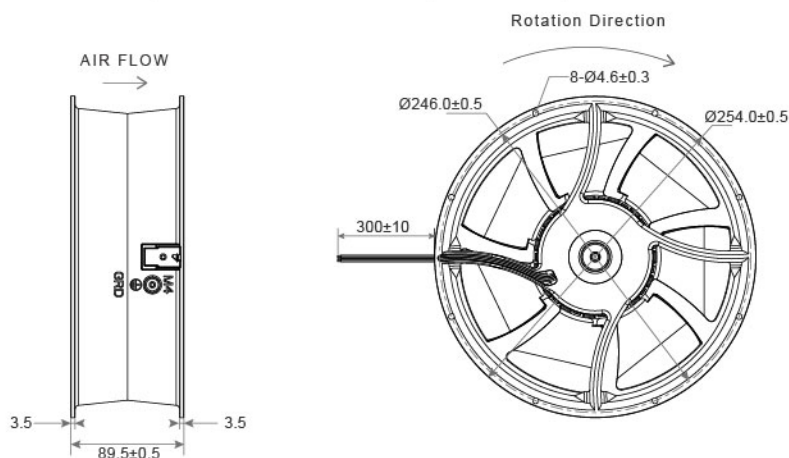

- Frame : Aluminum  
外框材質：鋁框
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball Bearing  
軸承：◎滾珠軸承
- Unit Weight : 2100g  
風扇單體重量：2100克

P&Q Curve At Rated Voltage

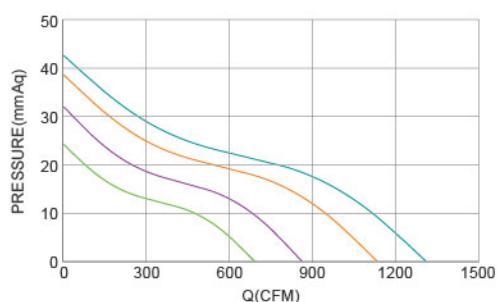

| Model No.     | Bearing Type | Voltage (VDC)  | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m³/min) | Air Pressure (mmH₂O) | Air Pressure (Inch H₂O) | Noise (dBA) |
|---------------|--------------|----------------|-------------|-----------|-------------|----------------|-------------------|----------------------|-------------------------|-------------|
| TRF25489B12L  | ◎            | 12 (8.0~13.0)  | 7.0         | 84        | 2600        | 847.2          | 24.06             | 22.47                | 0.89                    | 68.0        |
| TRF25489B24L  | ◎            | 24 (14.0~27.0) | 3.5         | 84        | 2600        | 847.2          | 24.06             | 22.47                | 0.89                    | 68.0        |
| TRF25489B24M  | ◎            | 24 (14.0~27.0) | 4.2         | 100       | 3000        | 977.6          | 27.76             | 28.19                | 1.11                    | 71.0        |
| TRF25489B24H  | ◎            | 24 (14.0~27.0) | 5.0         | 120       | 3400        | 1108.0         | 31.46             | 36.30                | 1.43                    | 74.0        |
| TRF25489B24VH | ◎            | 24 (14.0~27.0) | 6.5         | 156       | 3800        | 1238.4         | 35.17             | 40.38                | 1.59                    | 77.0        |
| TRF25489B48L  | ◎            | 48 (36.0~60.0) | 1.8         | 84        | 2600        | 847.2          | 24.06             | 22.47                | 0.89                    | 68.0        |
| TRF25489B48M  | ◎            | 48 (36.0~60.0) | 2.1         | 100       | 3000        | 977.6          | 27.76             | 28.19                | 1.11                    | 71.0        |
| TRF25489B48H  | ◎            | 48 (36.0~60.0) | 2.5         | 120       | 3400        | 1108.0         | 31.46             | 36.30                | 1.43                    | 74.0        |
| TRF25489B48VH | ◎            | 48 (36.0~60.0) | 3.3         | 156       | 3800        | 1238.4         | 35.17             | 40.38                | 1.59                    | 77.0        |