


- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball bearing  
軸承：◎滾珠軸承
- Unit Weight : 265g  
風扇單體重量：265克

P&Q Curve At Rated Voltage

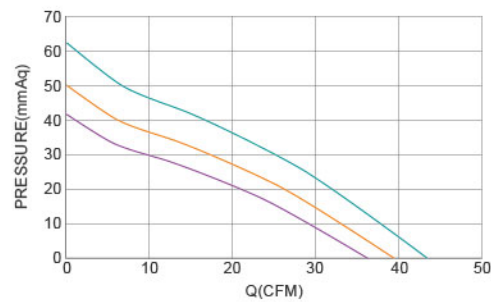

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow		Air Pressure		Noise (dBA)
						(CFM)	(m <sup>3</sup> /min)	(mmH <sub>2</sub> O)	(Inch H <sub>2</sub> O)	
TRB12725x12M	◎	12 (7.2~13.8)	0.9	10.8	2800	36.7	1.04	41.60	1.64	42.0
TRB12725x12H	◎	12 (7.2~13.8)	1.1	13.2	4300	39.2	1.11	49.98	1.97	56.0
TRB12725x12VH	◎	12 (7.2~13.8)	1.4	16.8	5300	43.1	1.22	62.23	2.45	62.0
TRB12725x24M	◎	24 (14.5~27.5)	0.1	2.4	2800	36.7	1.04	41.60	1.64	42.0
TRB12725x24H	◎	24 (14.5~27.5)	0.3	6.5	4300	39.2	1.11	49.98	1.97	56.0
TRB12725x24VH	◎	24 (14.5~27.5)	0.5	12.0	5300	43.1	1.22	62.23	2.45	62.0
TRB12725x48H	◎	48 (35.6~60.5)	0.6	13.2	4300	39.2	1.11	49.98	1.97	56.0
TRB12725x48VH	◎	48 (35.6~60.5)	0.3	12.0	5300	43.1	1.22	62.23	2.45	62.0

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. ■ B41