


- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※ Sleeve · ★ WRB · ◎ Two Ball bearing  
軸承：※ 含油 · ★ WRB · ◎ 滾珠軸承
- Unit Weight : 64g  
風扇單體重量：64克

P&Q Curve At Rated Voltage

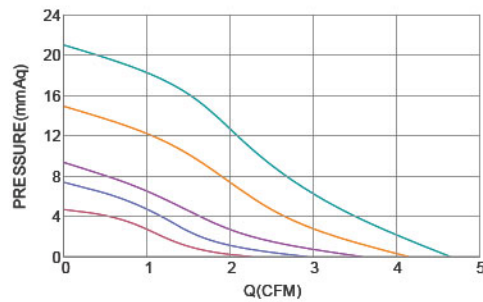

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m <sup>3</sup> /min)	Air Pressure (mmH <sub>2</sub> O)	Air Pressure (Inch H <sub>2</sub> O)	Noise (dBA)
TRB6018x05L	※◎★	5 (4.0~6.0)	0.20	1.0	3500	4.06	0.11	6.35	0.25	31.5
TRB6018x05M	※◎★	5 (4.0~6.0)	0.30	1.5	4500	5.09	0.14	10.67	0.42	33.5
TRB6018x05H	※◎★	5 (4.0~6.0)	0.40	2.0	5500	5.89	0.17	18.03	0.71	39.5
TRB6018x12L	※◎★	12 (7.2~13.8)	0.10	1.2	3500	4.06	0.11	6.35	0.25	31.5
TRB6018x12M	※◎★	12 (7.2~13.8)	0.15	1.8	4500	5.09	0.14	10.67	0.42	33.5
TRB6018x12H	※◎★	12 (7.2~13.8)	0.25	3.0	5500	5.89	0.17	18.03	0.71	36.5
TRB6018x12VH	※◎★	12 (7.2~13.8)	0.30	3.6	6500	6.52	0.19	21.59	0.85	39.5
TRB6018x24H	※◎★	24 (15.0~28.8)	0.12	2.9	5500	5.89	0.17	18.03	0.71	36.5
TRB6018x24VH	※◎★	24 (15.0~28.8)	0.16	3.8	6500	6.52	0.19	21.59	0.85	39.5

◎ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. ■ B25