





DIMENSIONS DRAWING UNIT : mm







- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball Bearing
軸承：◎滾珠軸承
- Unit Weight : 62g
風扇單體重量：62克

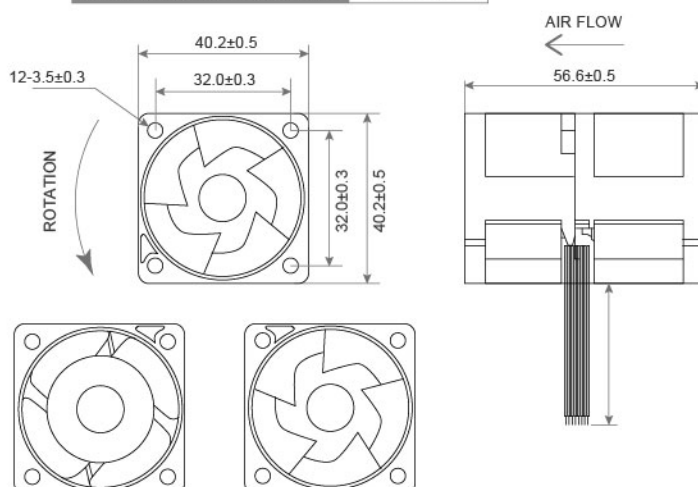


P&Q Curve At Rated Voltage

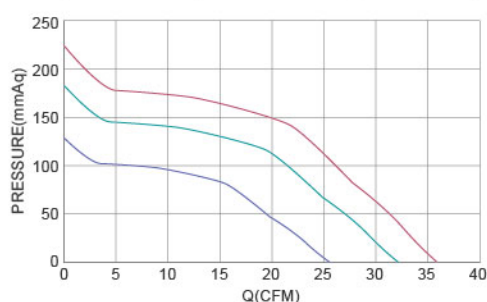

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRD4056B12L	◎	12 (7.0~14.0)	1.22	14.64	23000	17.57	0.50	29.91	1.18	56.00
TRD4056B12M	◎	12 (7.0~14.0)	1.50	18.00	29000	22.15	0.63	47.55	1.87	58.80
TRD4056B12H	◎	12 (7.0~14.0)	1.72	20.64	35000	26.74	0.76	69.26	2.73	61.74
TRD4056B12VH	◎	12 (7.0~14.0)	1.95	23.40	41000	31.32	0.89	95.04	3.74	64.83
TRD4056B12SH	◎	12 (7.0~14.0)	2.20	26.40	47000	35.90	1.02	124.90	4.92	68.07
TRD4056B24L	◎	24 (15.0~27.0)	0.61	14.64	23000	17.57	0.50	29.91	1.18	56.00
TRD4056B24M	◎	24 (15.0~27.0)	0.75	18.00	29000	22.15	0.63	47.55	1.87	58.80
TRD4056B24H	◎	24 (15.0~27.0)	0.86	20.64	35000	26.74	0.76	69.26	2.73	61.74
TRD4056B24VH	◎	24 (15.0~27.0)	0.98	23.40	41000	31.32	0.89	95.04	3.74	64.83
TRD4056B24SH	◎	24 (15.0~27.0)	1.10	26.40	47000	35.90	1.02	124.90	4.92	68.07
TRD4056B48L	◎	48 (35.0~57.0)	0.31	14.64	23000	17.57	0.50	29.91	1.18	56.00
TRD4056B48M	◎	48 (35.0~57.0)	0.38	18.00	29000	22.15	0.63	47.55	1.87	58.80
TRD4056B48H	◎	48 (35.0~57.0)	0.43	20.64	35000	26.74	0.76	69.26	2.73	61.74
TRD4056B48VH	◎	48 (35.0~57.0)	0.49	23.40	41000	31.32	0.89	95.04	3.74	64.83
TRD4056B48SH	◎	48 (35.0~57.0)	0.55	26.40	47000	35.90	1.02	124.90	4.92	68.07

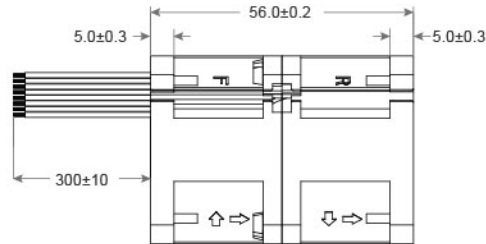

P&Q Curve At Rated Voltage

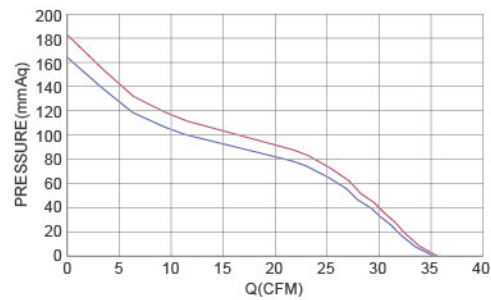



- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 90g
風扇單體重量：90克

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRF4056B12VH	※★◎	12 (9.0~13.5)	2.80	33.6	27000 / 25000	35.41	1.00	166.6	6.56	72.0
TRF4056B12SH	※★◎	12 (9.0~13.5)	3.20	38.4	28500 / 32500	35.41	1.00	181.6	7.15	72.0

DC Axial Fan TRF4056 SERIES 40X40X56mm

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball bearing
軸承：◎滾珠軸承
- Unit Weight : 90g
風扇單體重量：90克

DIMENSIONS DRAWING UNIT : mm


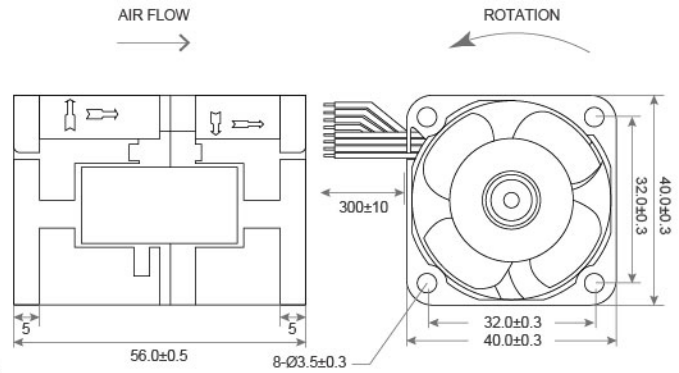
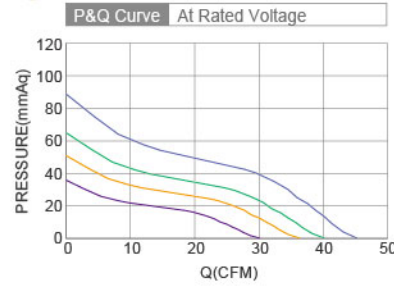


Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRF4056B12D	※◎★	12 (9.5~13.2)	0.75	9.0	15000 / 10000	24.72	0.70	41.9	1.65	56.0
TRF4056B12L	※◎★	12 (9.5~13.2)	0.95	11.4	16700 / 11250	27.19	0.77	51.1	2.01	58.0
TRF4056B12M	※◎★	12 (9.5~13.2)	1.35	16.2	19000 / 12600	30.72	0.83	64.3	2.53	61.0
TRF4056B12H	※◎★	12 (9.5~13.2)	2.30	27.6	21000 / 18000	34.72	0.99	89.7	3.53	64.5

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball


★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. ■ A26

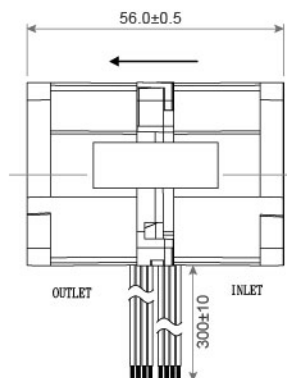

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball Bearing
軸承：◎滾珠軸承
- Unit Weight : 97.8g
風扇單體重量：97.8克

P&Q Curve At Rated Voltage

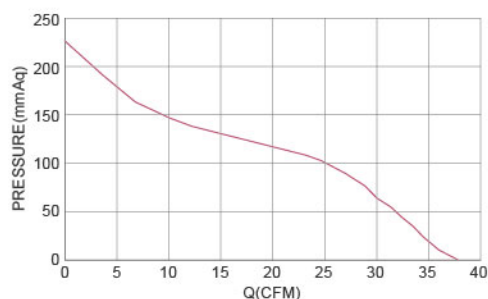

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
SB04056B12HP	◎	12 (10.2~13.8)	3.0	36.0	28000 / 30500	37.31	1.06	224.96	8.86	71.3