



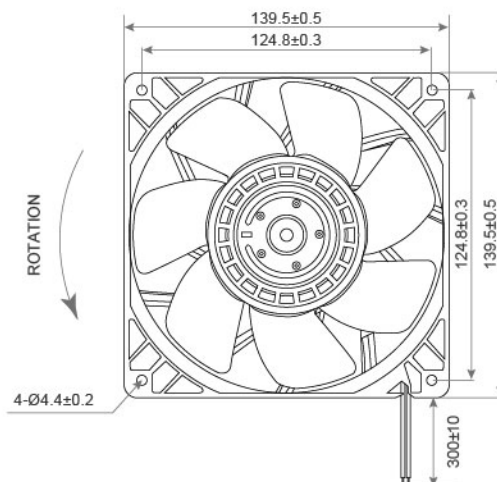


DIMENSIONS DRAWING UNIT : mm

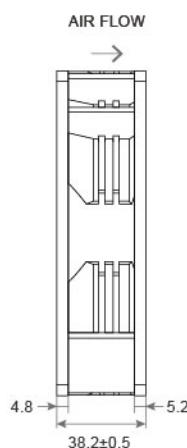

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 488g
風扇單體重量：488克

P&Q Curve At Rated Voltage

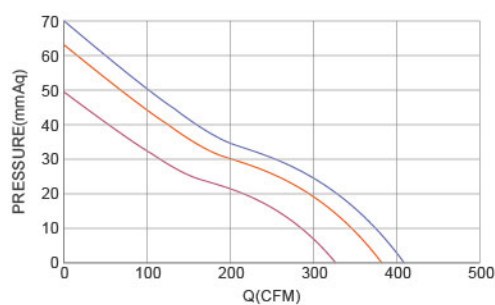


Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRF14038x12H	※★◎	12 (7.2-13.8)	4.01	48.0	5000	325.2	9.24	49.78	1.96	68.0
TRF14038x12VH	※★◎	12 (7.2-13.8)	6.02	72.1	6000	381.2	10.83	64.77	2.55	74.5
TRF14038x12SH	※★◎	12 (7.2-13.8)	7.01	84.0	6500	410.1	11.65	69.85	2.75	76.5
TRF14038x24H	※★◎	24 (14.5~27.5)	2.00	48.0	5000	325.2	9.24	49.78	1.96	68.0
TRF14038x24VH	※★◎	24 (14.5~27.5)	3.01	72.1	6000	381.2	10.83	64.77	2.55	74.5
TRF14038x24SH	※★◎	24 (14.5~27.5)	3.50	84.0	6500	410.1	11.65	69.85	2.75	76.5
TRF14038x48H	※★◎	48 (29.0~55.0)	1.00	48.0	5000	325.2	9.24	49.78	1.96	68.0
TRF14038x48VH	※★◎	48 (29.0~55.0)	1.50	72.1	6000	381.2	10.83	64.77	2.55	74.5
TRF14038x48SH	※★◎	48 (29.0~55.0)	1.75	84.0	6500	410.1	11.65	69.85	2.75	76.5



⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A109★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.




DIMENSIONS DRAWING UNIT : mm

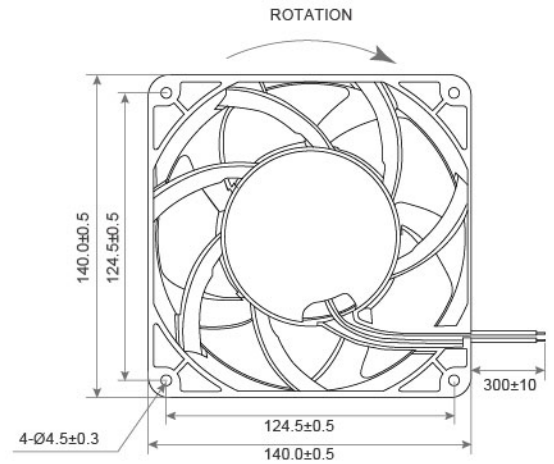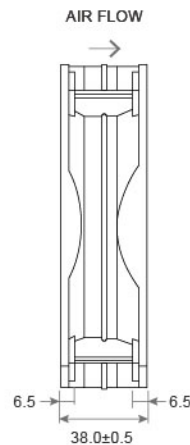

- Frame : Aluminum
外框材質：鋁框
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 700g
風扇單體重量：700克

P&Q Curve At Rated Voltage



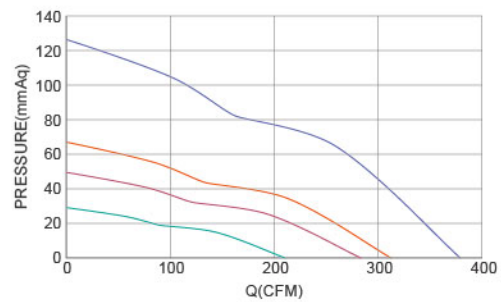


Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRF14038x12H	※◎★	12 (7.2-13.8)	1.4	16.8	5200	212.0	6.02	30.48	1.20	62.0
TRF14038x12VH	※◎★	12 (7.2-13.8)	2.8	33.6	6650	272.0	7.72	49.02	1.93	67.0
TRF14038x12SH	※◎★	12 (7.2-13.8)	4.2	50.4	7600	310.0	8.80	65.27	2.57	70.0
TRF14038x12UH	※◎★	12 (7.2-13.8)	8.0	96.0	9200	375.0	10.65	127.25	5.01	78.0
TRF14038x24H	※◎★	24 (14.5~27.5)	0.7	16.8	5200	212.0	6.02	30.48	1.20	62.0
TRF14038x24VH	※◎★	24 (14.5~27.5)	1.4	33.6	6650	272.0	7.72	49.02	1.93	67.0
TRF14038x24SH	※◎★	24 (14.5~27.5)	2.1	50.4	7600	310.0	8.80	65.27	2.57	70.0
TRF14038x24UH	※◎★	24 (14.5~27.5)	4.0	96.0	9200	375.0	10.65	127.25	5.01	78.0
TRF14038x48H	※◎★	48 (29.0~55.0)	0.4	16.8	5200	212.0	6.02	30.48	1.20	62.0
TRF14038x48VH	※◎★	48 (29.0~55.0)	0.7	33.6	6650	272.0	7.72	49.02	1.93	67.0
TRF14038x48SH	※◎★	48 (29.0~55.0)	1.1	50.4	7600	310.0	8.80	65.27	2.57	70.0
TRF14038x48UH	※◎★	48 (29.0~55.0)	2.0	96.0	9200	375.0	10.65	127.25	5.01	78.0

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball


★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. A110

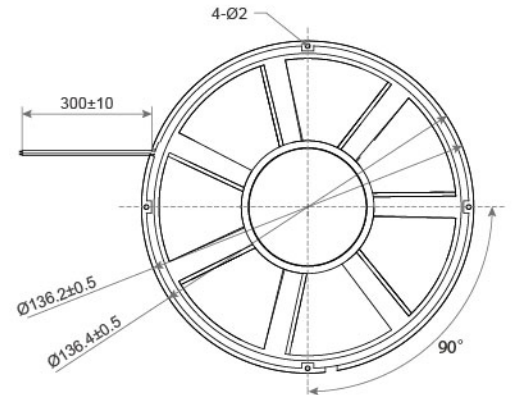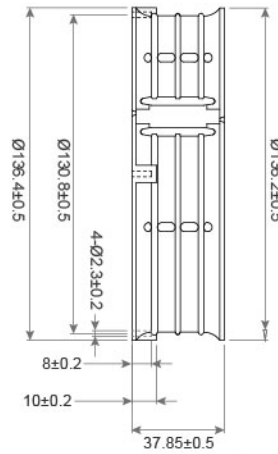

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 410g
風扇單體重量：410克

P&Q Curve At Rated Voltage

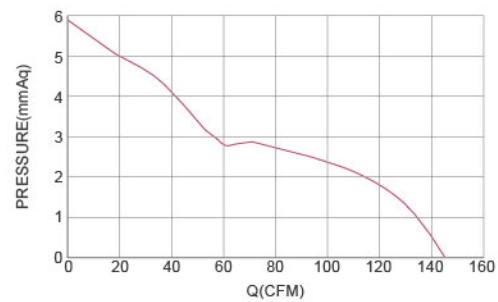

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRM14038x12H	※★◎	12 (7.5~13.5)	0.8	9.6	2550	145.16	4.11	5.73	0.23	46.0
TRM14038x24H	※★◎	24 (18.0~26.5)	0.4	9.6	2550	145.16	4.11	5.73	0.23	46.0
TRM14038x48H	※★◎	48 (36.0~54.0)	0.2	9.6	2550	145.16	4.11	5.73	0.23	46.0