


P&Q Curve At Rated Voltage

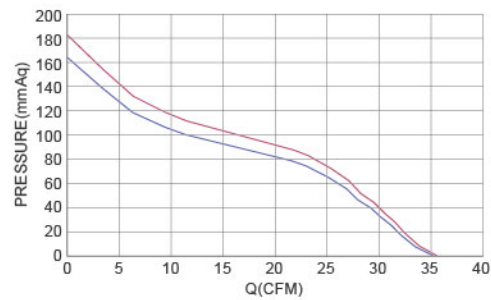



- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 90g
風扇單體重量：90克

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRF4056B12VH	※★◎	12 (9.0~13.5)	2.80	33.6	27000 / 25000	35.41	1.00	166.6	6.56	72.0
TRF4056B12SH	※★◎	12 (9.0~13.5)	3.20	38.4	28500 / 32500	35.41	1.00	181.6	7.15	72.0

DC Axial Fan TRF4056 SERIES 40X40X56mm

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball bearing
軸承：◎滾珠軸承
- Unit Weight : 90g
風扇單體重量：90克

DIMENSIONS DRAWING UNIT : mm

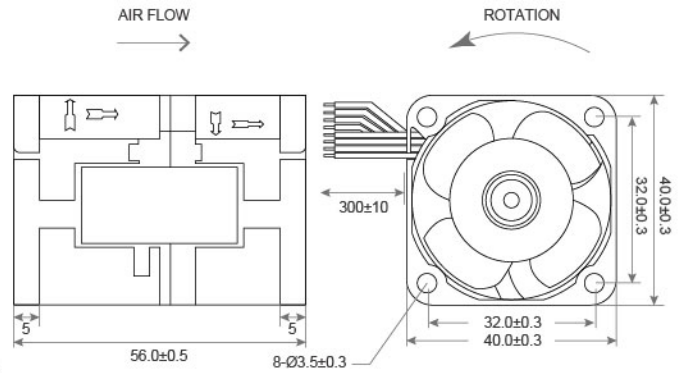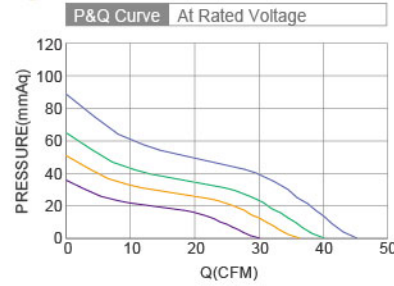

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM) (m³/min)	Air Pressure (mmH₂O) (Inch H₂O)	Noise (dBA)
TRF4056B12D	※◎★	12 (9.5~13.2)	0.75	9.0	15000 / 10000	24.72 0.70	41.9 1.65	56.0
TRF4056B12L	※◎★	12 (9.5~13.2)	0.95	11.4	16700 / 11250	27.19 0.77	51.1 2.01	58.0
TRF4056B12M	※◎★	12 (9.5~13.2)	1.35	16.2	19000 / 12600	30.72 0.83	64.3 2.53	61.0
TRF4056B12H	※◎★	12 (9.5~13.2)	2.30	27.6	21000 / 18000	34.72 0.99	89.7 3.53	64.5

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. ■ A26