

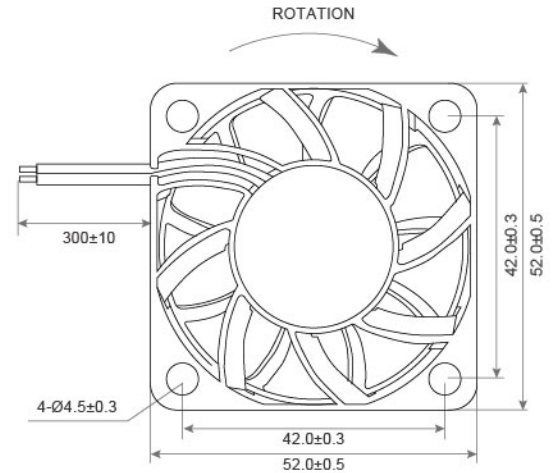
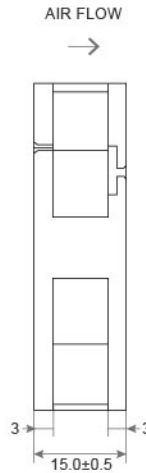




- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 36g
風扇單體重量：36克

P&Q Curve At Rated Voltage

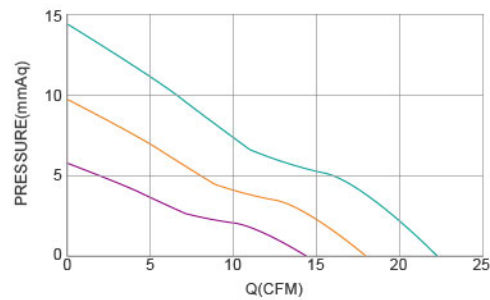

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow		Air Pressure		Noise (dBA)
						(CFM)	(m ³ /min)	(mmH ₂ O)	(Inch H ₂ O)	
TRF5215x05L	※◎★	5 (4.5~ 6.0)	0.10	0.50	3400	7.6	0.22	1.73	0.07	16.0
TRF5215x05M	※◎★	5 (4.5~ 6.0)	0.12	0.60	4300	9.7	0.28	2.79	0.11	22.0
TRF5215x05H	※◎★	5 (4.5~ 6.0)	0.20	1.00	6300	14.1	0.40	6.02	0.24	32.0
TRF5215x05VH	※◎★	5 (4.5~ 6.0)	0.31	1.55	7800	17.7	0.50	9.32	0.37	38.0
TRF5215x12L	※◎★	12 (7.5~13.2)	0.04	0.48	3400	7.6	0.22	1.73	0.07	16.0
TRF5215x12M	※◎★	12 (7.5~13.2)	0.05	0.60	4300	9.7	0.28	2.79	0.11	22.0
TRF5215x12H	※◎★	12 (7.5~13.2)	0.08	0.96	6300	14.1	0.40	6.02	0.24	32.0
TRF5215x12VH	※◎★	12 (7.5~13.2)	0.13	1.56	7800	17.7	0.50	9.32	0.37	38.0
TRF5215x12SH	※◎★	12 (7.5~13.2)	0.28	3.36	10000	22.3	0.63	14.00	0.55	43.0
TRF5215x24L	※◎★	24 (14.0~26.2)	0.02	0.48	3400	7.6	0.22	1.73	0.07	16.0
TRF5215x24M	※◎★	24 (14.0~26.2)	0.03	0.60	4300	9.7	0.28	2.79	0.11	22.0
TRF5215x24H	※◎★	24 (14.0~26.2)	0.04	0.96	6300	14.1	0.40	6.02	0.24	32.0
TRF5215x24VH	※◎★	24 (14.0~26.2)	0.07	1.60	7800	17.7	0.50	9.32	0.37	38.0
TRF5215x24SH	※◎★	24 (14.0~26.2)	0.14	3.36	10000	22.3	0.63	14.00	0.55	43.0

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A33 ★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.