



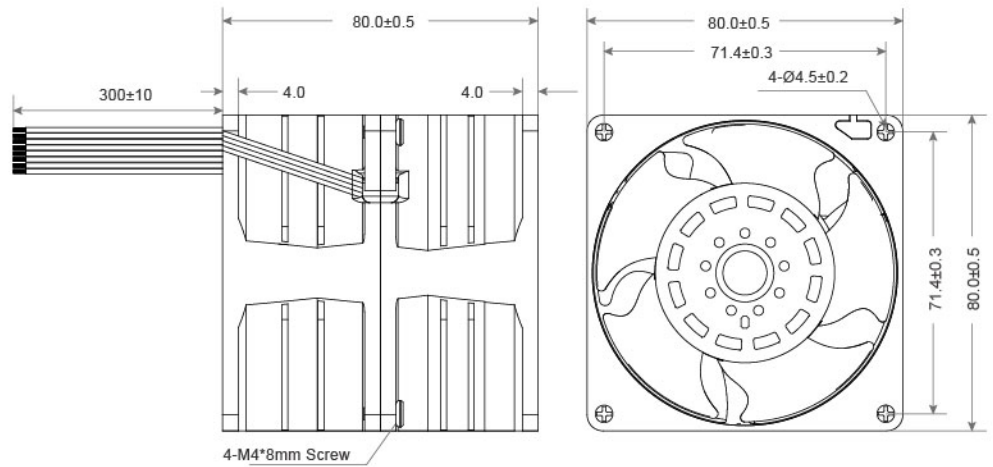


- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball Bearing
軸承：◎滾珠軸承
- Unit Weight : 410g
風扇單體重量：410克



P&Q Curve At Rated Voltage

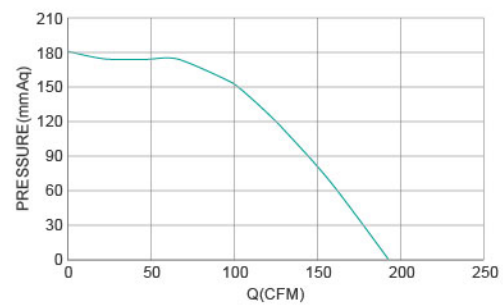

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRF8080x12VH	◎	12 (9.0-13.5)	10.00	120.0	15400/15200	186.9	5.29	181.22	7.14	82.0




DIMENSIONS DRAWING UNIT : mm

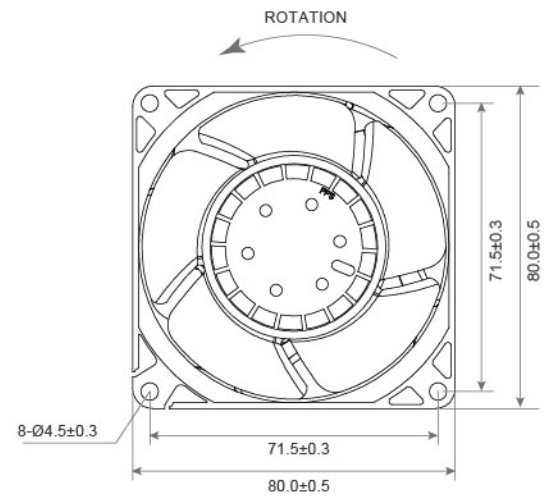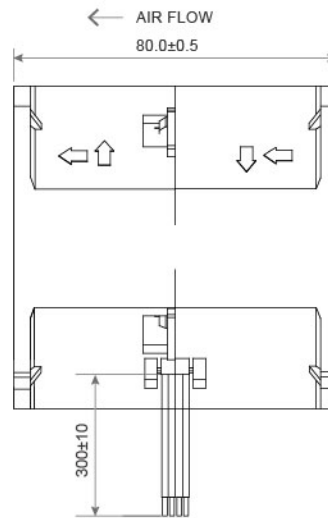

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 452g
風扇單體重量：410克

P&Q Curve At Rated Voltage

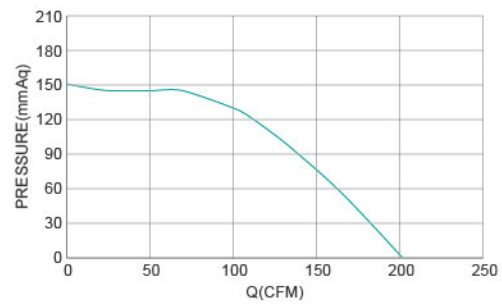

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRF8080x12VH	※★◎	12 (10.8-13.2)	11.00	132.0	15000/13500	204.24	5.78	153.4	5.98	76.0
TRF8080x24VH	※★◎	24 (18.0-26.4)	5.78	138.6	15000/13500	204.24	5.78	153.4	5.98	76.0
TRF8080x48VH	※★◎	48 (36.0-56.0)	3.05	146.4	15000/13500	204.24	5.78	153.4	5.98	76.0