





DIMENSIONS DRAWING UNIT : mm

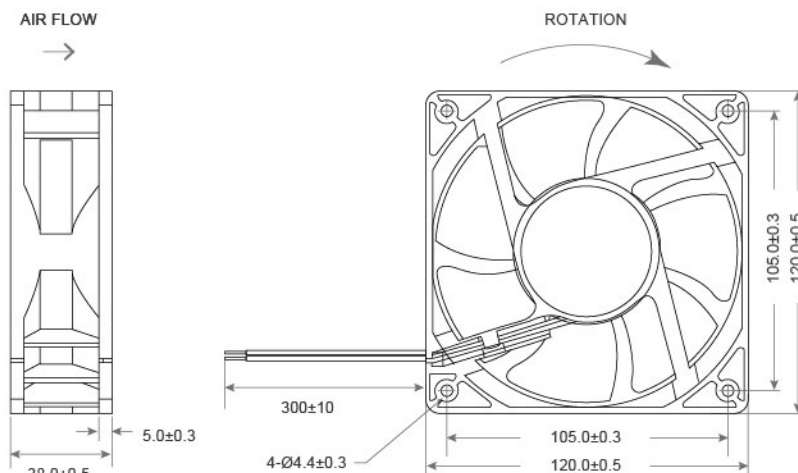

- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing  
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 280g  
風扇單體重量：280克

P&Q Curve At Rated Voltage

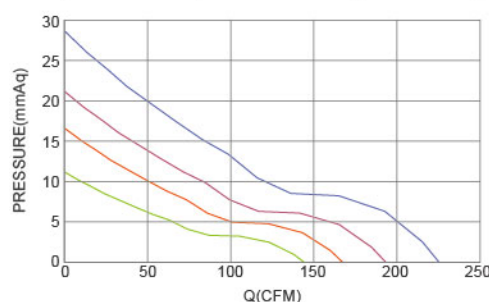


| Model No.    | Bearing Type | Voltage (VDC)  | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m³/min) | Air Pressure (mmH₂O) | Air Pressure (Inch H₂O) | Noise (dBA) |
|--------------|--------------|----------------|-------------|-----------|-------------|----------------|-------------------|----------------------|-------------------------|-------------|
| TRS1238x12D  | ※★◎          | 12 (7.0~14.0)  | 0.50        | 6.00      | 2600        | 103.03         | 2.92              | 6.11                 | 0.24                    | 41.7        |
| TRS1238x12L  | ※★◎          | 12 (7.0~14.0)  | 0.66        | 7.92      | 3200        | 126.93         | 3.59              | 9.25                 | 0.36                    | 47.8        |
| TRS1238x12M  | ※★◎          | 12 (7.0~14.0)  | 0.98        | 11.76     | 3600        | 142.80         | 4.04              | 11.71                | 0.46                    | 50.2        |
| TRS1238x12H  | ※★◎          | 12 (7.0~14.0)  | 1.22        | 14.64     | 4200        | 166.60         | 4.71              | 15.93                | 0.63                    | 55.1        |
| TRS1238x12VH | ◎            | 12 (7.0~14.0)  | 1.60        | 19.20     | 4800        | 190.40         | 5.39              | 20.82                | 0.82                    | 59.2        |
| TRS1238x12SH | ◎            | 12 (7.0~14.0)  | 2.60        | 31.20     | 5600        | 222.13         | 6.29              | 28.34                | 1.12                    | 64.8        |
| TRS1238x24D  | ※★◎          | 24 (15.0~27.0) | 0.25        | 6.00      | 2600        | 103.03         | 2.92              | 6.11                 | 0.24                    | 41.7        |
| TRS1238x24L  | ※★◎          | 24 (15.0~27.0) | 0.33        | 7.92      | 3200        | 126.93         | 3.59              | 9.25                 | 0.36                    | 47.8        |
| TRS1238x24M  | ※★◎          | 24 (15.0~27.0) | 0.49        | 11.76     | 3600        | 142.80         | 4.04              | 11.71                | 0.46                    | 50.2        |
| TRS1238x24H  | ※★◎          | 24 (15.0~27.0) | 0.61        | 14.64     | 4200        | 166.60         | 4.71              | 15.93                | 0.63                    | 55.1        |
| TRS1238x24VH | ◎            | 24 (15.0~27.0) | 0.80        | 19.20     | 4800        | 190.40         | 5.39              | 20.82                | 0.82                    | 59.2        |
| TRS1238x24SH | ◎            | 24 (15.0~27.0) | 1.30        | 31.20     | 5600        | 222.13         | 6.29              | 28.34                | 1.12                    | 64.8        |
| TRS1238x48D  | ※★◎          | 48 (35.0~57.0) | 0.12        | 5.76      | 2600        | 103.03         | 2.92              | 6.11                 | 0.24                    | 41.7        |
| TRS1238x48L  | ※★◎          | 48 (35.0~57.0) | 0.16        | 7.68      | 3200        | 126.93         | 3.59              | 9.25                 | 0.36                    | 47.8        |
| TRS1238x48M  | ※★◎          | 48 (35.0~57.0) | 0.25        | 12.00     | 3600        | 142.80         | 4.04              | 11.71                | 0.46                    | 50.2        |
| TRS1238x48H  | ※★◎          | 48 (35.0~57.0) | 0.30        | 14.40     | 4200        | 166.60         | 4.71              | 15.93                | 0.63                    | 55.1        |
| TRS1238x48VH | ◎            | 48 (35.0~57.0) | 0.40        | 19.20     | 4800        | 190.40         | 5.39              | 20.82                | 0.82                    | 59.2        |
| TRS1238x48SH | ◎            | 48 (35.0~57.0) | 0.65        | 31.20     | 5600        | 222.13         | 6.29              | 28.34                | 1.12                    | 64.8        |


⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A97 ★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.




DIMENSIONS DRAWING UNIT : mm

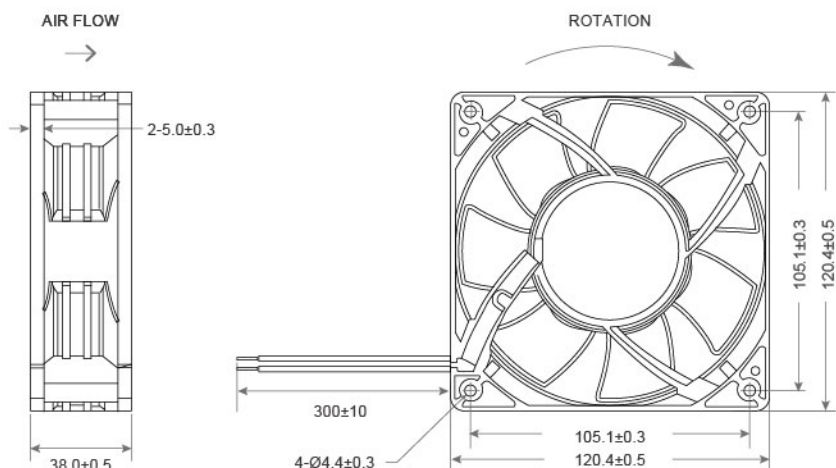

- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing  
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 380g  
風扇單體重量：380克

P&Q Curve At Rated Voltage

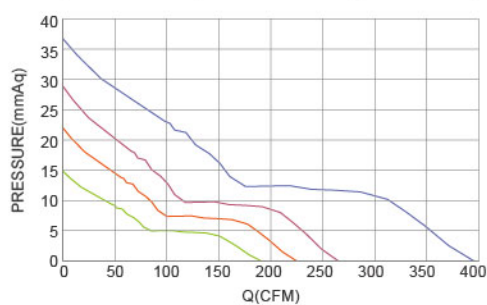

| Model No.    | Bearing Type | Voltage (VDC)  | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m <sup>3</sup> /min) | Air Pressure (mmH <sub>2</sub> O) | Air Pressure (Inch H <sub>2</sub> O) | Noise (dBA) |
|--------------|--------------|----------------|-------------|-----------|-------------|----------------|--------------------------------|-----------------------------------|--------------------------------------|-------------|
| TRD1238x12L  | ※★◎          | 12 (7.0~14.0)  | 0.43        | 5.16      | 3000        | 150.92         | 4.27                           | 9.66                              | 0.38                                 | 39.5        |
| TRD1238x12M  | ※★◎          | 12 (7.0~14.0)  | 1.00        | 12.00     | 3700        | 186.13         | 5.27                           | 14.69                             | 0.58                                 | 46.3        |
| TRD1238x12H  | ※★◎          | 12 (7.0~14.0)  | 1.50        | 18.00     | 4500        | 226.37         | 6.40                           | 21.74                             | 0.86                                 | 49.6        |
| TRD1238x12VH | ◎            | 12 (7.0~14.0)  | 2.50        | 30.00     | 5200        | 261.59         | 7.40                           | 29.02                             | 1.14                                 | 56.7        |
| TRD1238x24L  | ※★◎          | 24 (15.0~27.0) | 0.22        | 5.28      | 3000        | 150.92         | 4.27                           | 9.66                              | 0.38                                 | 39.5        |
| TRD1238x24M  | ※★◎          | 24 (15.0~27.0) | 0.50        | 12.00     | 3700        | 186.13         | 5.27                           | 14.69                             | 0.58                                 | 46.3        |
| TRD1238x24H  | ※★◎          | 24 (15.0~27.0) | 0.75        | 18.00     | 4500        | 226.37         | 6.40                           | 21.74                             | 0.86                                 | 49.6        |
| TRD1238x24VH | ◎            | 24 (15.0~27.0) | 1.40        | 33.60     | 5200        | 261.59         | 7.40                           | 29.02                             | 1.14                                 | 56.7        |
| TRD1238x48L  | ※★◎          | 48 (35.0~57.0) | 0.11        | 5.28      | 3000        | 150.92         | 4.27                           | 9.66                              | 0.38                                 | 39.5        |
| TRD1238x48M  | ※★◎          | 48 (35.0~57.0) | 0.25        | 12.00     | 3700        | 186.13         | 5.27                           | 14.69                             | 0.58                                 | 46.3        |
| TRD1238x48H  | ※★◎          | 48 (35.0~57.0) | 0.38        | 18.00     | 4500        | 226.37         | 6.40                           | 21.74                             | 0.86                                 | 49.6        |
| TRD1238x48VH | ◎            | 48 (35.0~57.0) | 0.70        | 33.60     | 5200        | 261.59         | 7.40                           | 29.02                             | 1.14                                 | 56.7        |

Optional Frames :




⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. A98




DIMENSIONS DRAWING UNIT : mm

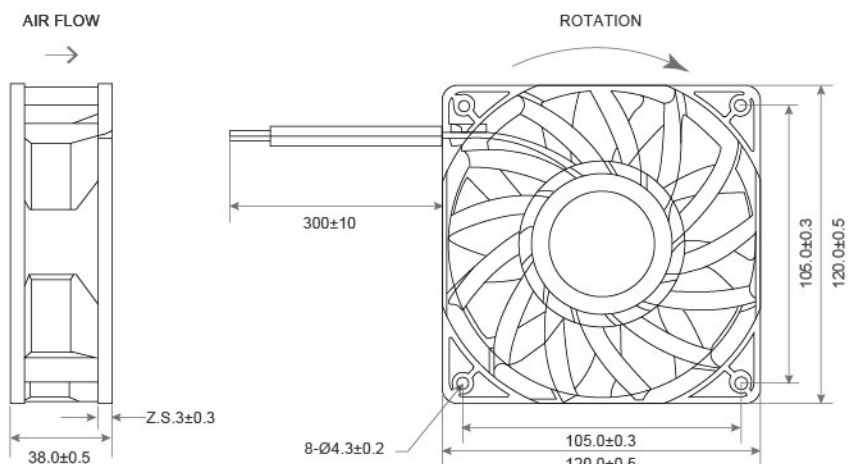

- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing  
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 380g  
風扇單體重量：380克

P&Q Curve At Rated Voltage

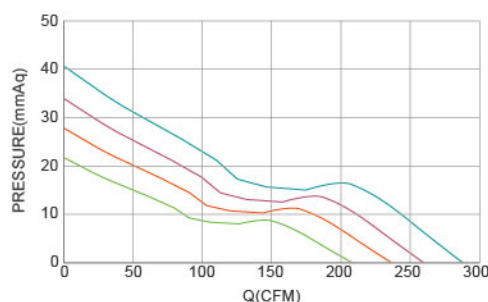

| Model No.    | Bearing Type | Voltage (VDC)  | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m³/min) | Air Pressure (mmH₂O) | Air Pressure (Inch H₂O) | Noise (dBA) |
|--------------|--------------|----------------|-------------|-----------|-------------|----------------|-------------------|----------------------|-------------------------|-------------|
| TRD1238x12D  | ※★◎          | 12 (7.0~14.0)  | 0.86        | 10.32     | 3000        | 158.12         | 4.47              | 12.36                | 0.49                    | 54.3        |
| TRD1238x12L  | ※★◎          | 12 (7.0~14.0)  | 1.30        | 15.60     | 3500        | 183.60         | 5.20              | 16.66                | 0.66                    | 58.5        |
| TRD1238x12M  | ※★◎          | 12 (7.0~14.0)  | 1.86        | 22.32     | 4000        | 209.11         | 5.92              | 21.53                | 0.85                    | 61.7        |
| TRD1238x12H  | ※★◎          | 12 (7.0~14.0)  | 2.60        | 31.20     | 4500        | 234.65         | 6.64              | 27.20                | 1.07                    | 64.6        |
| TRD1238x24D  | ※★◎          | 24 (15.0~27.0) | 0.43        | 10.32     | 3000        | 158.12         | 4.47              | 12.36                | 0.49                    | 54.3        |
| TRD1238x24L  | ※★◎          | 24 (15.0~27.0) | 0.65        | 15.60     | 3500        | 183.60         | 5.20              | 16.66                | 0.66                    | 58.5        |
| TRD1238x24M  | ※★◎          | 24 (15.0~27.0) | 0.93        | 22.32     | 4000        | 209.11         | 5.92              | 21.53                | 0.85                    | 61.7        |
| TRD1238x24H  | ※★◎          | 24 (15.0~27.0) | 1.30        | 31.20     | 4500        | 234.65         | 6.64              | 27.20                | 1.07                    | 64.6        |
| TRD1238x24VH | ◎            | 24 (15.0~27.0) | 1.90        | 45.60     | 5000        | 260.30         | 7.37              | 33.42                | 1.32                    | 67.9        |
| TRD1238x48D  | ※★◎          | 48 (35.0~57.0) | 0.21        | 10.08     | 3000        | 158.12         | 4.47              | 12.36                | 0.49                    | 54.3        |
| TRD1238x48L  | ※★◎          | 48 (35.0~57.0) | 0.32        | 15.36     | 3500        | 183.60         | 5.20              | 16.66                | 0.66                    | 58.5        |
| TRD1238x48M  | ※★◎          | 48 (35.0~57.0) | 0.46        | 22.08     | 4000        | 209.11         | 5.92              | 21.53                | 0.85                    | 61.7        |
| TRD1238x48H  | ※★◎          | 48 (35.0~57.0) | 0.65        | 31.20     | 4500        | 234.65         | 6.64              | 27.20                | 1.07                    | 64.6        |
| TRD1238x48VH | ◎            | 48 (35.0~57.0) | 0.95        | 45.60     | 5000        | 260.30         | 7.37              | 33.42                | 1.32                    | 67.9        |
| TRD1238x48SH | ◎            | 48 (35.0~57.0) | 1.16        | 55.68     | 5500        | 285.69         | 8.09              | 40.24                | 1.58                    | 71.2        |

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.




■ A99 ★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.

## DC Axial Fan

# TRD12038 C SERIES 120X120X38mm



- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball  
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 318g  
風扇單體重量：318克

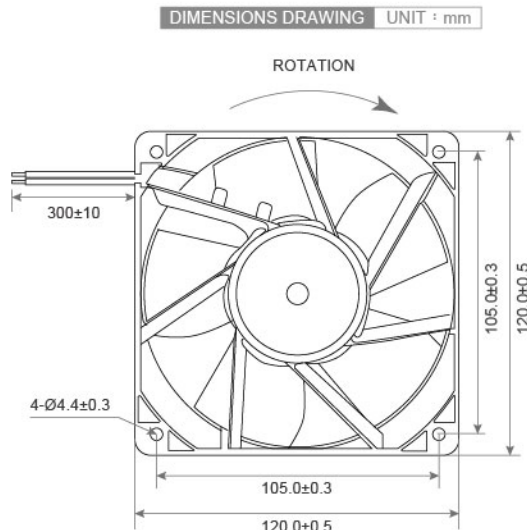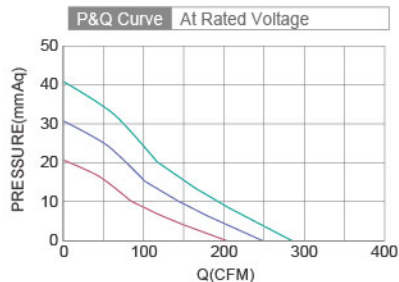




| Model No.    | Bearing Type | Voltage (VDC)  | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m³/min) | Air Pressure (mmH₂O) | Air Pressure (Inch H₂O) | Noise (dBA) |
|--------------|--------------|----------------|-------------|-----------|-------------|----------------|-------------------|----------------------|-------------------------|-------------|
| TRD1238x12L  | ※◎★          | 12 (7.0~14.0)  | 1.00        | 12.00     | 4300        | 200.68         | 5.68              | 21.11                | 0.83                    | 56.40       |
| TRD1238x12H  | ※◎★          | 12 (7.0~14.0)  | 1.72        | 20.64     | 5200        | 242.49         | 6.87              | 30.87                | 1.22                    | 61.76       |
| TRD1238x12SH | ※◎★          | 12 (7.0~14.0)  | 2.54        | 30.48     | 6000        | 280.02         | 7.92              | 41.00                | 1.62                    | 64.50       |
| TRD1238x24L  | ※◎★          | 24 (15.0~27.0) | 0.50        | 12.00     | 4300        | 200.68         | 5.68              | 21.11                | 0.83                    | 56.40       |
| TRD1238x24H  | ※◎★          | 24 (15.0~27.0) | 0.86        | 20.64     | 5200        | 242.49         | 6.87              | 30.87                | 1.22                    | 61.76       |
| TRD1238x24SH | ※◎★          | 24 (15.0~27.0) | 1.27        | 30.48     | 6000        | 280.02         | 7.92              | 41.00                | 1.62                    | 64.50       |

## DC Axial Fan

# TRM12038 E SERIES 120X120X38mm



- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball  
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 228g  
風扇單體重量：228克

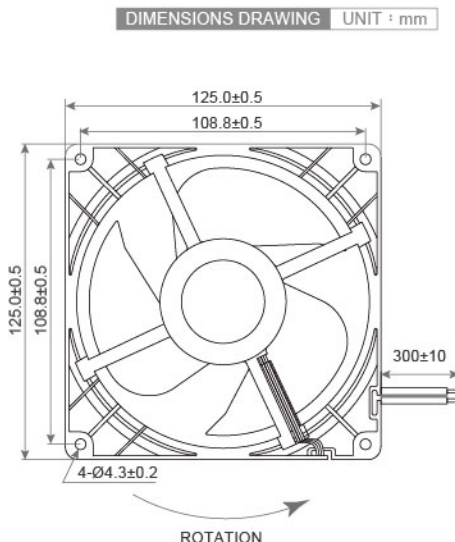
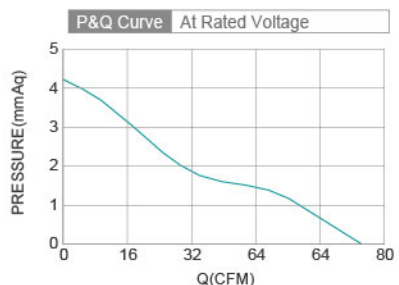


| Model No.    | Bearing Type | Voltage (VDC) | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m³/min) | Air Pressure (mmH₂O) | Air Pressure (Inch H₂O) | Noise (dBA) |
|--------------|--------------|---------------|-------------|-----------|-------------|----------------|-------------------|----------------------|-------------------------|-------------|
| TRM12038x12L | ※★◎          | 12 (8.0~13.7) | 0.11        | 1.32      | 2200        | 74.29          | 2.102             | 4.22                 | 0.166                   | 35.9        |

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball


★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information. ★產品規格變更不另行通知 Specifications are subject to change without notice. ■ A100

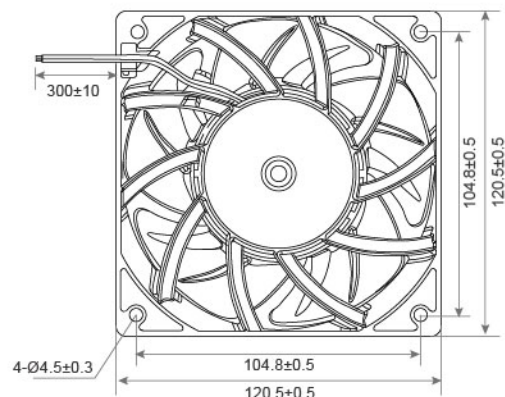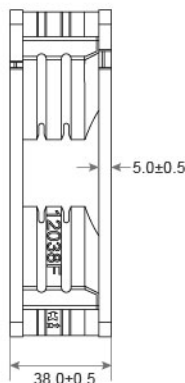


- Frame : Aluminum  
外框材質：鋁框
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball Bearing  
軸承：◎滾珠軸承
- Unit Weight : 294.5g  
風扇單體重量：294.5克



P&Q Curve At Rated Voltage

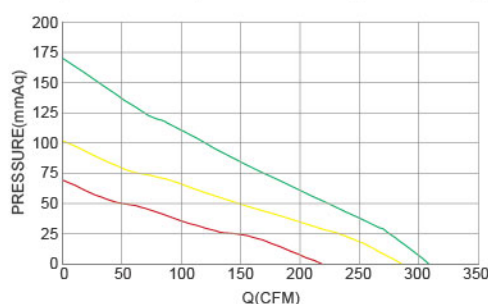

| Model No.     | Bearing Type | Voltage (VDC) | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m <sup>3</sup> /min) | Air Pressure (mmH <sub>2</sub> O) | Air Pressure (Inch H <sub>2</sub> O) | Noise (dBA) |
|---------------|--------------|---------------|-------------|-----------|-------------|----------------|--------------------------------|-----------------------------------|--------------------------------------|-------------|
| TRY12038B12H  | ◎            | 12( 8.0~13.5) | 3.0         | 36.0      | 8000        | 218.0          | 6.18                           | 69.2                              | 2.72                                 | 66.7        |
| TRY12038B12VH | ◎            | 12( 8.0~13.5) | 5.8         | 69.6      | 10000       | 281.0          | 7.96                           | 102.0                             | 4.01                                 | 70.4        |
| TRY12038B12SH | ◎            | 12( 8.0~13.5) | 10.0        | 120.0     | 12000       | 308.5          | 8.74                           | 170.0                             | 6.69                                 | 78.0        |
| TRY12038B24H  | ◎            | 24(18.0~26.5) | 1.5         | 36.0      | 8000        | 218.0          | 6.18                           | 69.2                              | 2.72                                 | 66.7        |
| TRY12038B24VH | ◎            | 24(18.0~26.5) | 2.9         | 69.6      | 10000       | 281.0          | 7.96                           | 102.0                             | 4.01                                 | 70.4        |
| TRY12038B24SH | ◎            | 24(18.0~26.5) | 5.0         | 120.0     | 12000       | 308.5          | 8.74                           | 170.0                             | 6.69                                 | 78.0        |
| TRY12038B48H  | ◎            | 48(36.0~54.0) | 0.8         | 38.4      | 8000        | 218.0          | 6.18                           | 69.2                              | 2.72                                 | 66.7        |
| TRY12038B48VH | ◎            | 48(36.0~54.0) | 1.5         | 72.0      | 10000       | 281.0          | 7.96                           | 102.0                             | 4.01                                 | 70.4        |
| TRY12038B48SH | ◎            | 48(36.0~54.0) | 2.5         | 120.0     | 12000       | 308.5          | 8.74                           | 170.0                             | 6.69                                 | 78.0        |




DIMENSIONS DRAWING UNIT : mm

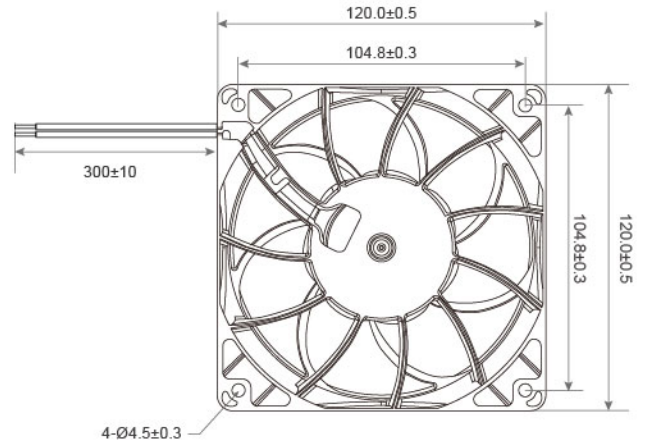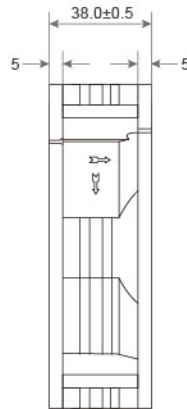

- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing  
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 310g  
風扇單體重量：310克

P&Q Curve At Rated Voltage

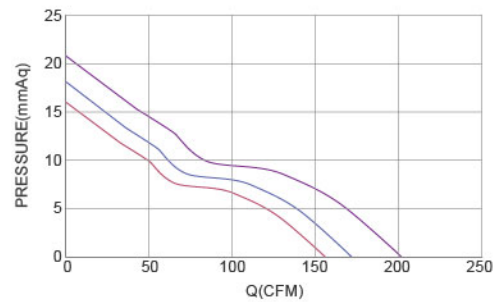

| Model No.     | Bearing Type | Voltage (VDC) | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m³/min) | Air Pressure (mmH₂O) | Air Pressure (Inch H₂O) | Noise (dBA) |
|---------------|--------------|---------------|-------------|-----------|-------------|----------------|-------------------|----------------------|-------------------------|-------------|
| TRY12038x12L  | ※◎★          | 12( 7.2~13.8) | 0.28        | 3.36      | 3000        | 97.86          | 2.78              | 6.29                 | 0.248                   | 37.0        |
| TRY12038x12M  | ※◎★          | 12( 7.2~13.8) | 0.38        | 4.56      | 3600        | 114.49         | 3.25              | 8.28                 | 0.326                   | 43.0        |
| TRY12038x12H  | ※◎★          | 12( 7.2~13.8) | 0.52        | 6.24      | 4100        | 131.28         | 3.72              | 10.37                | 0.408                   | 45.5        |
| TRY12038x12VH | ※◎★          | 12( 7.2~13.8) | 0.80        | 9.60      | 4700        | 153.33         | 4.35              | 16.11                | 0.634                   | 50.0        |
| TRY12038x12SH | ※◎★          | 12( 7.2~13.8) | 1.00        | 12.00     | 5200        | 170.90         | 4.85              | 18.21                | 0.717                   | 54.0        |
| TRY12038x12UH | ※◎★          | 12( 7.2~13.8) | 1.60        | 19.20     | 6000        | 200.73         | 5.70              | 20.90                | 0.823                   | 59.5        |
| TRY12038x24L  | ※◎★          | 24(14.5~27.5) | 0.12        | 3.36      | 3000        | 97.86          | 2.78              | 6.29                 | 0.248                   | 37.0        |
| TRY12038x24M  | ※◎★          | 24(14.5~27.5) | 0.19        | 4.56      | 3600        | 114.49         | 3.25              | 8.28                 | 0.326                   | 43.0        |
| TRY12038x24H  | ※◎★          | 24(14.5~27.5) | 0.26        | 6.24      | 4100        | 131.28         | 3.72              | 10.37                | 0.408                   | 45.5        |
| TRY12038x24VH | ※◎★          | 24(14.5~27.5) | 0.40        | 9.60      | 4700        | 153.33         | 4.35              | 16.11                | 0.634                   | 50.0        |
| TRY12038x24SH | ※◎★          | 24(14.5~27.5) | 0.50        | 12.00     | 5200        | 170.90         | 4.85              | 18.21                | 0.717                   | 54.0        |
| TRY12038x12UH | ※◎★          | 24(14.5~27.5) | 0.80        | 19.20     | 6000        | 200.73         | 5.70              | 20.90                | 0.823                   | 59.5        |
| TRY12038x48L  | ※◎★          | 48(29.0~55.0) | 0.06        | 3.36      | 3000        | 97.86          | 2.78              | 6.29                 | 0.248                   | 37.0        |
| TRY12038x48M  | ※◎★          | 48(29.0~55.0) | 0.10        | 4.56      | 3600        | 114.49         | 3.25              | 8.28                 | 0.326                   | 43.0        |
| TRY12038x12H  | ※◎★          | 48(29.0~55.0) | 0.13        | 6.24      | 4100        | 131.28         | 3.72              | 10.37                | 0.408                   | 45.5        |
| TRY12038x12VH | ※◎★          | 48(29.0~55.0) | 0.20        | 9.60      | 4700        | 153.33         | 4.35              | 16.11                | 0.634                   | 50.0        |
| TRY12038x12SH | ※◎★          | 48(29.0~55.0) | 0.25        | 12.00     | 5200        | 170.90         | 4.85              | 18.21                | 0.717                   | 54.0        |
| TRY12038x12UH | ※◎★          | 48(29.0~55.0) | 0.40        | 19.20     | 6000        | 200.73         | 5.70              | 20.90                | 0.823                   | 59.5        |





## DC Axial Fan

# TRY12038 FDG1 SERIES 120X120X38mm



- Frame : Aluminum  
外框材質：鋁框
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※ Sleeve • ★ WRB • ◎ Two Ball  
軸承：※含油 • ★WRB • ◎滾珠軸承
- Unit Weight : 420g  
風扇單體重量：420克

DIMENSIONS DRAWING UNIT : mm

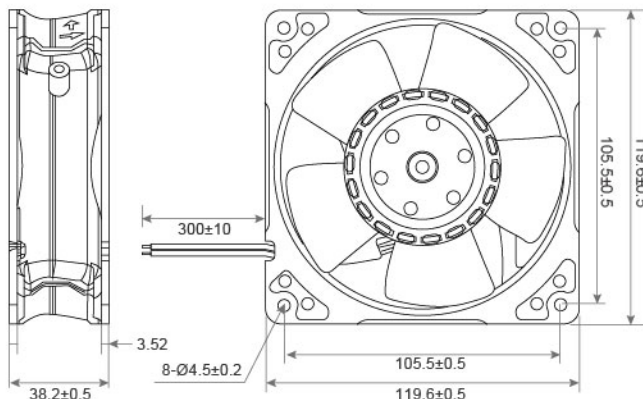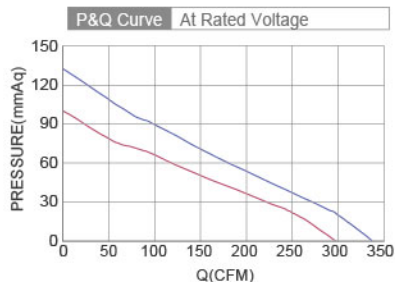

| Model No.     | Bearing Type | Voltage (VDC)  | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m³/min) | Air Pressure (mmH₂O) | Air Pressure (Inch H₂O) | Noise (dBA) |
|---------------|--------------|----------------|-------------|-----------|-------------|----------------|-------------------|----------------------|-------------------------|-------------|
| TRY12038x12VH | ◎            | 12 ( 7.2~13.2) | 7.4         | 88.8      | 9500        | 294            | 8.3               | 99.06                | 3.9                     | 76.0        |
| TRY12038x24SH | ◎            | 24 (14.5~27.5) | 3.7         | 88.8      | 9500        | 294            | 8.3               | 99.06                | 3.9                     | 76.0        |
| TRY12038x24XH | ◎            | 24 (14.5~27.5) | 5.0         | 120.0     | 11000       | 336            | 9.5               | 132.00               | 5.2                     | 78.0        |
| TRY12038x48SH | ◎            | 48 (36.0~55.0) | 1.9         | 88.8      | 9500        | 294            | 8.3               | 99.06                | 3.9                     | 76.0        |
| TRY12038x48XH | ◎            | 48 (36.0~55.0) | 2.5         | 120.0     | 11000       | 336            | 9.5               | 132.00               | 5.2                     | 78.0        |

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A101★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.