

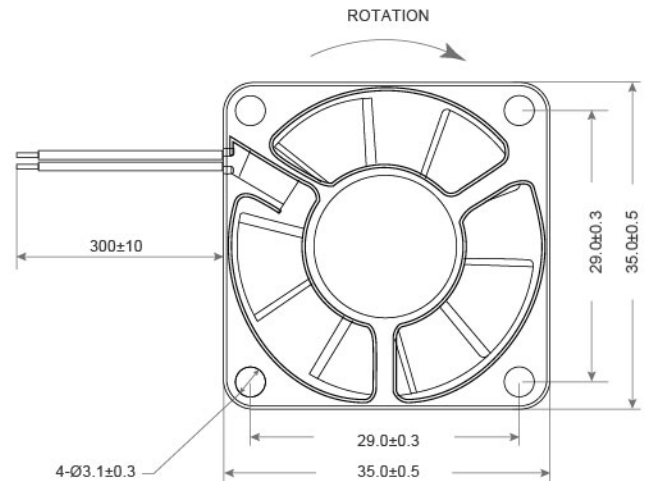



DIMENSIONS DRAWING UNIT : mm

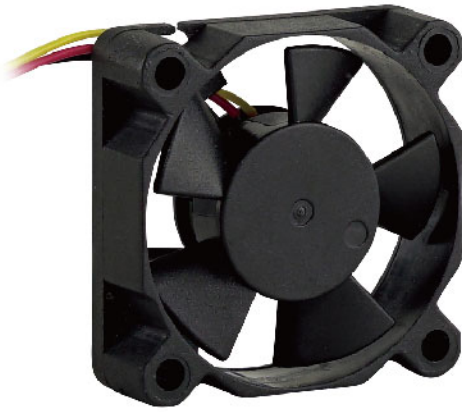

- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing  
軸承：※含油 · ◎滾珠軸承
- Unit Weight : 10g  
風扇單體重量：10克

P&Q Curve At Rated Voltage

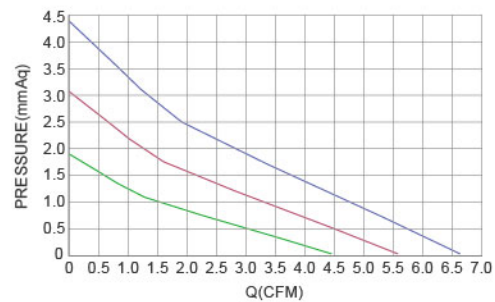


| Model No.    | Bearing Type | Voltage (VDC) | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m <sup>3</sup> /min) | Air Pressure (mmH <sub>2</sub> O) | Air Pressure (Inch H <sub>2</sub> O) | Noise (dBA) |
|--------------|--------------|---------------|-------------|-----------|-------------|----------------|--------------------------------|-----------------------------------|--------------------------------------|-------------|
| TRS3510x05L  | ※◎           | 5 (4.0~5.5)   | 0.10        | 0.50      | 6000        | 4.44           | 0.13                           | 1.94                              | 0.08                                 | 18.0        |
| TRS3510x05M  | ※◎           | 5 (4.0~5.5)   | 0.12        | 0.60      | 7500        | 5.55           | 0.16                           | 3.04                              | 0.12                                 | 21.0        |
| TRS3510x05H  | ※◎           | 5 (4.0~5.5)   | 0.15        | 0.75      | 9000        | 6.66           | 0.19                           | 4.37                              | 0.17                                 | 25.0        |
| TRS3510x05VH | ※◎           | 5 (4.0~5.5)   | 0.22        | 1.10      | 10000       | 7.40           | 0.21                           | 5.40                              | 0.21                                 | 28.0        |
| TRS3510x12L  | ※◎           | 12 (7.0~14.0) | 0.05        | 0.60      | 6000        | 4.44           | 0.13                           | 1.94                              | 0.08                                 | 18.0        |
| TRS3510x12M  | ※◎           | 12 (7.0~14.0) | 0.06        | 0.72      | 7500        | 5.55           | 0.16                           | 3.04                              | 0.12                                 | 21.0        |
| TRS3510x12H  | ※◎           | 12 (7.0~14.0) | 0.08        | 0.96      | 9000        | 6.66           | 0.19                           | 4.37                              | 0.17                                 | 25.0        |
| TRS3510x12VH | ※◎           | 12 (7.0~14.0) | 0.09        | 1.10      | 10000       | 7.40           | 0.21                           | 5.40                              | 0.21                                 | 28.0        |

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball



★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. ■ A10




# DC Axial Fan TRM3510 SERIES Ø35X10mm

DIMENSIONS DRAWING UNIT : mm

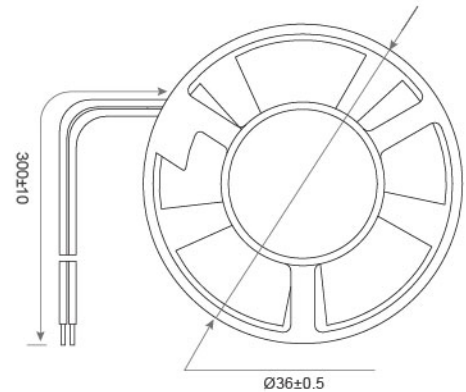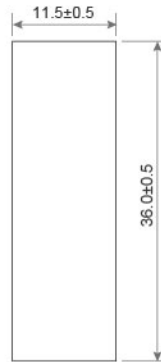

- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing  
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 9g  
風扇單體重量：9克

P&Q Curve At Rated Voltage

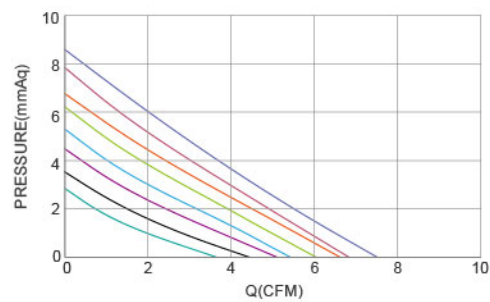

| Model No.    | Bearing Type | Voltage (VDC) | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m <sup>3</sup> /min) | Air Pressure (mmH <sub>2</sub> O) | Air Pressure (Inch H <sub>2</sub> O) | Noise (dBA) |
|--------------|--------------|---------------|-------------|-----------|-------------|----------------|--------------------------------|-----------------------------------|--------------------------------------|-------------|
| TRM3510x05M  | ※◎★          | 5 (3.6~6.8)   | 0.10        | 0.5       | 7000        | 3.91           | 0.111                          | 2.84                              | 0.112                                | 28.0        |
| TRM3510x05H  | ※◎★          | 5 (3.6~6.8)   | 0.12        | 0.6       | 8000        | 4.50           | 0.128                          | 3.51                              | 0.138                                | 31.0        |
| TRM3510x05VH | ※◎★          | 5 (3.6~6.8)   | 0.13        | 0.7       | 9000        | 5.00           | 0.142                          | 4.31                              | 0.17                                 | 34.4        |
| TRM3510x05SH | ※◎★          | 5 (3.6~6.8)   | 0.14        | 0.7       | 10000       | 5.32           | 0.151                          | 5.12                              | 0.202                                | 37.1        |
| TRM3510x05UH | ※◎★          | 5 (3.6~6.8)   | 0.18        | 0.9       | 12000       | 6.39           | 0.182                          | 6.77                              | 0.267                                | 41.0        |
| TRM3510x05XH | ※◎★          | 5 (3.6~6.8)   | 0.22        | 1.1       | 14000       | 7.41           | 0.211                          | 8.74                              | 0.344                                | 44.7        |
| TRM3510x12M  | ※◎★          | 12 (7.0~13.5) | 0.04        | 0.5       | 7000        | 3.91           | 0.111                          | 2.84                              | 0.112                                | 28.0        |
| TRM3510x12H  | ※◎★          | 12 (7.0~13.5) | 0.05        | 0.6       | 8000        | 4.50           | 0.128                          | 3.51                              | 0.138                                | 31.0        |
| TRM3510x12VH | ※◎★          | 12 (7.0~13.5) | 0.05        | 0.7       | 9000        | 5.00           | 0.142                          | 4.31                              | 0.17                                 | 34.4        |
| TRM3510x12SH | ※◎★          | 12 (7.0~13.5) | 0.06        | 0.7       | 10000       | 5.32           | 0.151                          | 5.12                              | 0.202                                | 37.1        |
| TRM3510x12UH | ※◎★          | 12 (7.0~13.5) | 0.08        | 0.9       | 12000       | 6.39           | 0.182                          | 6.77                              | 0.267                                | 41.0        |
| TRM3510x12XH | ※◎★          | 12 (7.0~13.5) | 0.09        | 1.1       | 14000       | 7.41           | 0.211                          | 8.74                              | 0.344                                | 44.7        |

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A11 ★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.