





DIMENSIONS DRAWING UNIT : mm

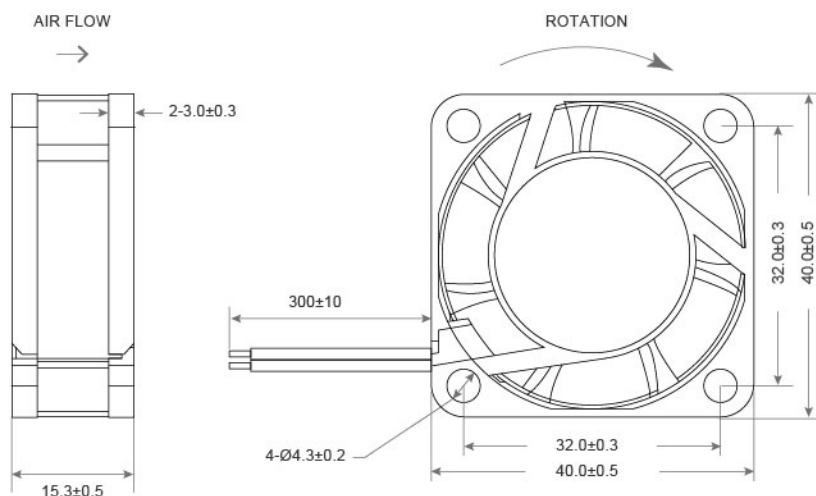

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 17g
風扇單體重量：17克
- Screw hole diameter 螺絲孔徑：Ø3.5 or Ø4.3

P&Q Curve At Rated Voltage

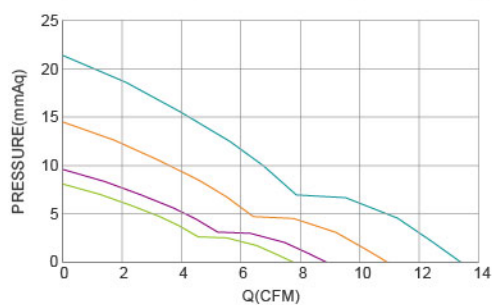

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRS4015x05D	※★◎	5 (4.0~6.0)	0.14	0.72	5000	4.95	0.14	3.07	0.12	18.6
TRS4015x05L	※★◎	5 (4.0~6.0)	0.19	0.96	6000	5.94	0.17	4.46	0.18	23.3
TRS4015x05M	※★◎	5 (4.0~6.0)	0.24	1.20	7000	6.84	0.19	5.86	0.23	27.3
TRS4015x05H	※★◎	5 (4.0~6.0)	0.32	1.60	8000	7.82	0.22	7.65	0.30	30.8
TRS4015x12L	※★◎	12 (7.0~14.0)	0.06	0.72	6000	5.94	0.17	4.46	0.18	23.3
TRS4015x12M	※★◎	12 (7.0~14.0)	0.08	0.96	7000	6.84	0.19	5.86	0.23	27.3
TRS4015x12H	※★◎	12 (7.0~14.0)	0.10	1.20	8000	7.82	0.22	7.65	0.30	30.8
TRS4015x12VH	※★◎	12 (7.0~14.0)	0.08	0.96	9000	8.80	0.25	9.69	0.38	33.9
TRS4015x12SH	※★◎	12 (7.0~14.0)	0.12	1.44	11000	10.75	0.30	14.47	0.57	40.1
TRS4015x12UH	※★◎	12 (7.0~14.0)	0.20	2.40	12500	12.22	0.35	18.69	0.74	39.2
TRS4015x24M	※★◎	24 (15.0~27.0)	0.12	1.44	7000	6.84	0.19	5.86	0.23	27.3
TRS4015x24H	※★◎	24 (15.0~27.0)	0.04	0.96	8000	7.82	0.22	7.65	0.30	30.8
TRS4015x24VH	※★◎	24 (15.0~27.0)	0.05	1.20	9000	8.80	0.25	9.69	0.38	33.9
TRS4015x24SH	※★◎	24 (15.0~27.0)	0.06	1.44	11000	10.75	0.30	14.47	0.57	40.1
TRS4015x24UH	※★◎	24 (15.0~27.0)	0.10	2.40	12500	12.22	0.35	18.69	0.74	39.2


⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. ■ A18




DIMENSIONS DRAWING UNIT : mm

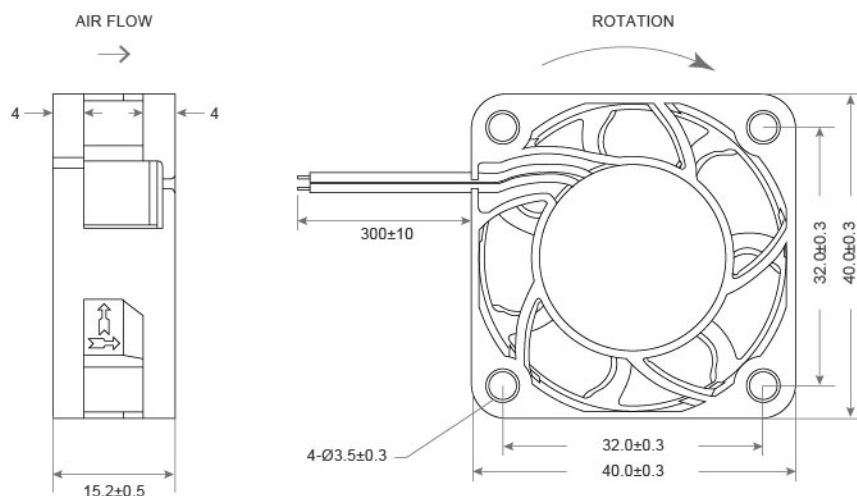

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 28g
風扇單體重量：28克

P&Q Curve At Rated Voltage

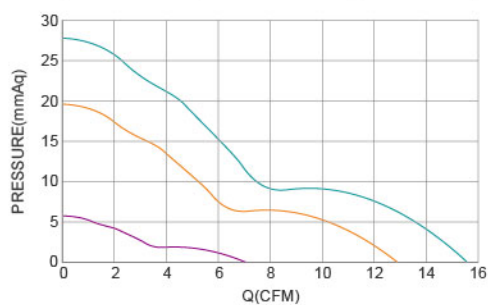

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRF4015x05H	※★◎	5 (4.5~5.6)	0.14	0.72	7300	7.1	0.20	6.10	0.24	28.0
TRF4015x05VH	※★◎	5 (4.5~5.6)	0.30	1.80	9000	8.3	0.24	9.65	0.38	32.5
TRF4015x05SH	※★◎	5 (4.5~5.6)	0.50	2.00	13100	12.7	0.36	19.56	0.77	42.0
TRF4015x12H	※★◎	12 (7.0~13.2)	0.06	0.72	7300	7.1	0.20	6.10	0.24	28.0
TRF4015x12VH	※★◎	12 (7.0~13.2)	0.15	1.80	9000	8.3	0.24	9.65	0.38	32.5
TRF4015x12SH	※★◎	12 (7.0~13.2)	0.17	2.04	13100	12.7	0.36	19.56	0.77	42.0
TRF4015x12UH	※★◎	12 (7.0~13.2)	0.30	3.60	16100	15.5	0.44	27.43	1.08	47.0
TRF4015x24H	※★◎	24 (14.5~26.5)	0.03	0.72	7300	7.1	0.20	6.10	0.24	28.0
TRF4015x24VH	※★◎	24 (14.5~26.5)	0.08	1.80	9000	8.3	0.24	9.65	0.38	32.5
TRF4015x24SH	※★◎	24 (14.5~26.5)	0.09	2.04	13100	12.7	0.36	19.56	0.77	42.0
TRF4015x24UH	※★◎	24 (14.5~26.5)	0.15	3.60	16100	15.5	0.44	27.43	1.08	47.0

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. A18