



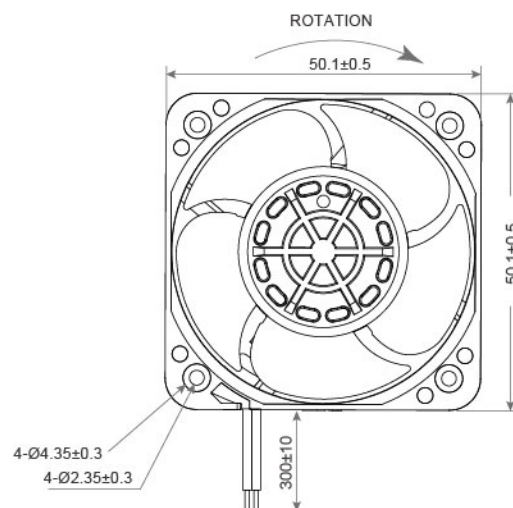


DIMENSIONS DRAWING UNIT : mm

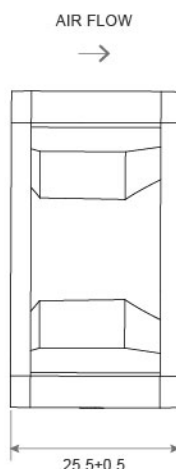

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 47g
風扇單體重量：47克

P&Q Curve At Rated Voltage

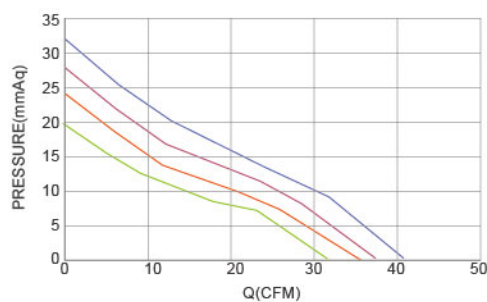

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRS5025x12M	※★◎	12 (7.0~13.5)	0.30	3.60	11000	31.7	0.89	19.0	0.75	48.4
TRS5025x12H	※★◎	12 (7.0~13.5)	0.37	6.00	12000	37.5	1.06	27.5	1.08	55.9
TRS5025x12VH	※★◎	12 (7.0~13.5)	0.56	6.72	14000	40.6	1.15	31.6	1.25	56.8
TRS5025x24M	※★◎	24 (18.0~26.5)	0.15	3.60	11000	31.7	0.89	19.0	0.75	48.4
TRS5025x24H	※★◎	24 (18.0~26.5)	0.19	6.00	12000	37.5	1.06	27.5	1.08	55.9
TRS5025x24VH	※★◎	24 (18.0~26.5)	0.28	6.72	14000	40.6	1.15	31.6	1.25	56.8

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. ■ A32