



DIMENSIONS DRAWING UNIT : mm

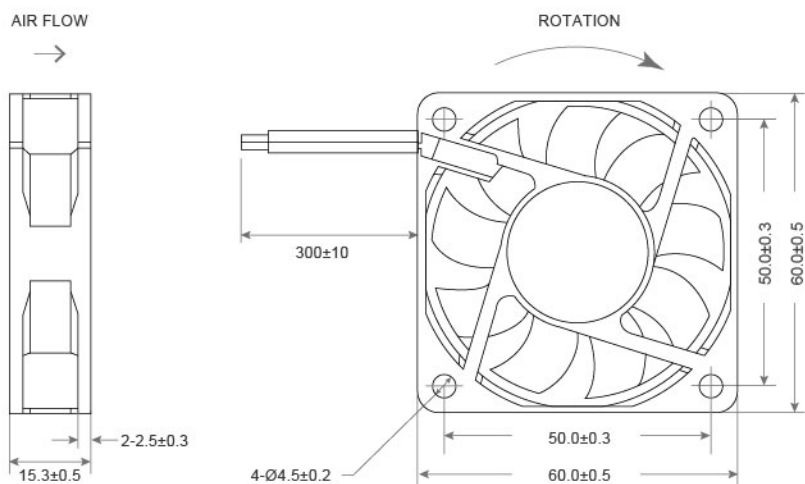


- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 28g
風扇單體重量：28克

P&Q Curve At Rated Voltage

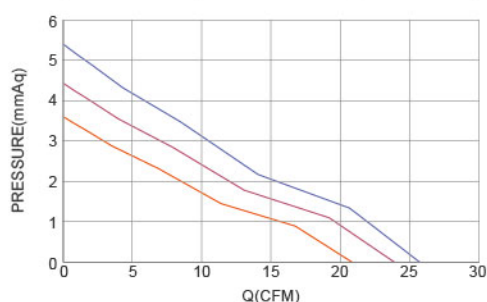

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRS6015x05D	※★◎	5 (4.0~5.5)	0.29	1.45	3000	13.01	0.37	1.86	0.07	29.2
TRS6015x05L	※★◎	5 (4.0~5.5)	0.36	1.80	3500	16.20	0.46	2.18	0.09	30.0
TRS6015x05M	※★◎	5 (4.0~5.5)	0.46	2.30	4000	18.51	0.52	2.85	0.11	31.5
TRS6015x12D	※★◎	12 (7.0~14.0)	0.04	0.48	3000	13.01	0.37	1.86	0.07	29.2
TRS6015x12L	※★◎	12 (7.0~14.0)	0.05	0.60	3500	16.20	0.46	2.18	0.10	30.0
TRS6015x12M	※★◎	12 (7.0~14.0)	0.10	1.20	4000	18.51	0.52	2.85	0.11	31.5
TRS6015x12H	※★◎	12 (7.0~14.0)	0.16	1.92	4500	20.82	0.59	3.60	0.14	34.5
TRS6015x12VH	※★◎	12 (7.0~14.0)	0.18	2.16	5000	23.14	0.65	4.45	0.18	35.4
TRS6015x12SH	※★◎	12 (7.0~14.0)	0.20	2.40	5500	25.45	0.72	5.38	0.21	38.0
TRS6015x24L	※★◎	24 (15.0~27.0)	0.03	0.60	3500	16.20	0.46	2.18	0.09	30.0
TRS6015x24M	※★◎	24 (15.0~27.0)	0.05	1.20	4000	18.51	0.52	2.85	0.11	31.5
TRS6015x24H	※★◎	24 (15.0~27.0)	0.08	1.92	4500	20.82	0.59	3.60	0.14	34.5
TRS6015x24VH	※★◎	24 (15.0~27.0)	0.09	2.16	5000	23.14	0.65	4.45	0.18	35.4
TRS6015x24SH	※★◎	24 (15.0~27.0)	0.10	2.40	5500	25.45	0.72	5.38	0.21	38.0




Screw Holes :



⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball


★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A35 ★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.

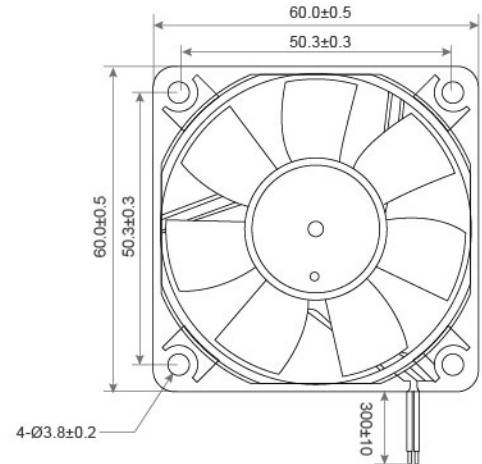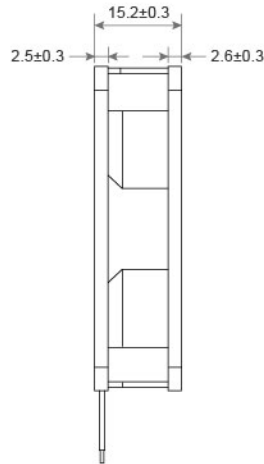



- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※ Sleeve · ★ WRB · ◎ Two Ball Bearing
軸承：※ 含油 · ★ WRB · ◎ 滾珠軸承
- Unit Weight : 30g
風扇單體重量：30克

P&Q Curve At Rated Voltage

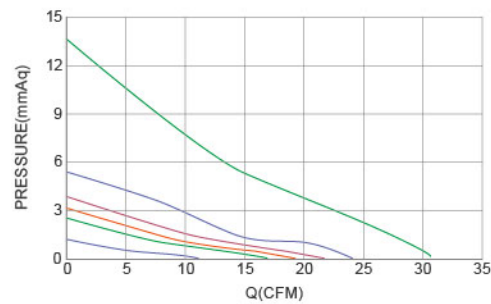


Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRY6015x12L	※★◎	12 (7.5~13.2)	0.04	0.48	2650	11.15	0.31	1.19	0.05	16.0
TRY6015x12M	※★◎	12 (7.5~13.2)	0.09	1.09	3900	17.01	0.48	2.46	0.10	27.0
TRY6015x12H	※★◎	12 (7.5~13.2)	0.13	1.56	4500	19.36	0.55	3.10	0.12	31.0
TRY6015x12VH	※★◎	12 (7.5~13.2)	0.18	2.16	5100	21.80	0.62	3.81	0.15	35.0
TRY6015x12SH	※★◎	12 (7.5~13.2)	0.24	2.88	5700	24.20	0.69	5.33	0.21	39.5
TRY6015x12UH	※★◎	12 (7.5~13.2)	0.32	3.84	7000	30.50	0.87	13.97	0.55	47.5
TRY6015x12L	※★◎	24 (14.0~26.2)	0.02	0.48	2650	11.15	0.31	1.19	0.05	16.0
TRY6015x12M	※★◎	24 (14.0~26.2)	0.04	0.96	3900	17.01	0.48	2.46	0.10	27.0
TRY6015x12H	※★◎	24 (14.0~26.2)	0.07	1.56	4500	19.36	0.55	3.10	0.12	31.0
TRY6015x12VH	※★◎	24 (14.0~26.2)	0.09	2.16	5100	21.80	0.62	3.81	0.15	35.0
TRY6015x12SH	※★◎	24 (14.0~26.2)	0.12	2.88	5700	24.20	0.69	5.33	0.21	39.5
TRY6015x12UH	※★◎	24 (14.0~26.2)	0.16	3.84	7000	30.50	0.87	13.97	0.55	47.5

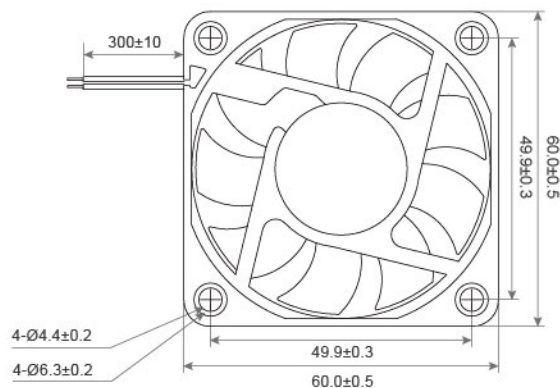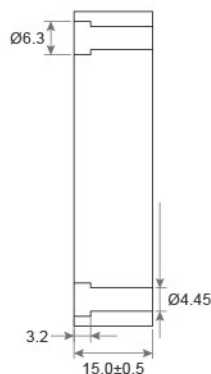

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 38g
風扇單體重量：38克

P&Q Curve At Rated Voltage

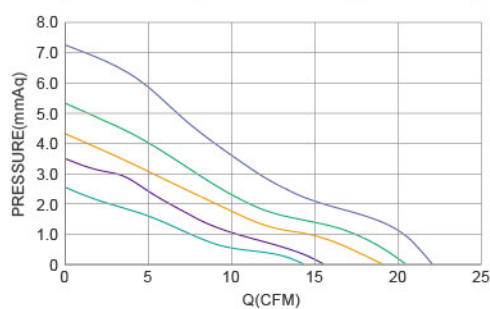

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRM6015x5L	※★◎	5 (1.8~6.0)	0.14	0.72	2000	9.41	0.268	1.34	0.053	21.1
TRM6015x5M	※★◎	5 (1.8~6.0)	0.19	0.96	3000	11.5	0.328	1.86	0.073	24.8
TRM6015x5H	※★◎	5 (1.8~6.0)	0.24	1.20	3500	14.2	0.406	2.61	0.103	29.8
TRM6015x5VH	※★◎	5 (1.8~6.0)	0.29	1.44	4000	16.4	0.468	3.50	0.138	31.2
TRM6015x12L	※★◎	12 (7.0~13.5)	0.06	0.72	2000	9.4	0.268	1.34	0.053	21.1
TRM6015x12M	※★◎	12 (7.0~13.5)	0.08	0.96	3000	11.5	0.328	1.86	0.073	24.8
TRM6015x12H	※★◎	12 (7.0~13.5)	0.10	1.20	3500	14.2	0.406	2.61	0.103	29.8
TRM6015x12VH	※★◎	12 (7.0~13.5)	0.12	1.44	4000	16.4	0.468	3.50	0.138	31.2
TRM6015x12SH	※★◎	12 (7.0~13.5)	0.14	1.68	4500	18.3	0.524	4.35	0.171	34.8
TRM6015x12UH	※★◎	12 (7.0~13.5)	0.16	1.92	5000	20.5	0.584	5.34	0.210	36.6
TRM6015x12XH	※★◎	12 (7.0~13.5)	0.20	2.40	6000	22.4	0.640	7.33	0.289	41.0
TRM6015x24L	※★◎	24 (18.0~26.5)	0.03	0.72	2000	9.4	0.268	1.34	0.053	21.1
TRM6015x24M	※★◎	24 (18.0~26.5)	0.04	0.96	3000	11.5	0.328	1.86	0.073	24.8
TRM6015x24H	※★◎	24 (18.0~26.5)	0.05	1.20	3500	14.2	0.406	2.61	0.103	29.8
TRM6015x24VH	※★◎	24 (18.0~26.5)	0.06	1.44	4000	16.4	0.468	3.50	0.138	31.2
TRM6015x24SH	※★◎	24 (18.0~26.5)	0.07	1.68	4500	18.3	0.524	4.35	0.171	34.8
TRM6015x24UH	※★◎	24 (18.0~26.5)	0.08	1.92	5000	20.5	0.584	5.34	0.210	36.6
TRM6015x24XH	※★◎	24 (18.0~26.5)	0.10	2.40	6000	22.4	0.640	7.33	0.289	41.0