






- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※ Sleeve · ★ WRB · ◎ Two Ball Bearing
軸承：※ 含油 · ★ WRB · ◎ 滾珠軸承
- Unit Weight : 80g
風扇單體重量：80克

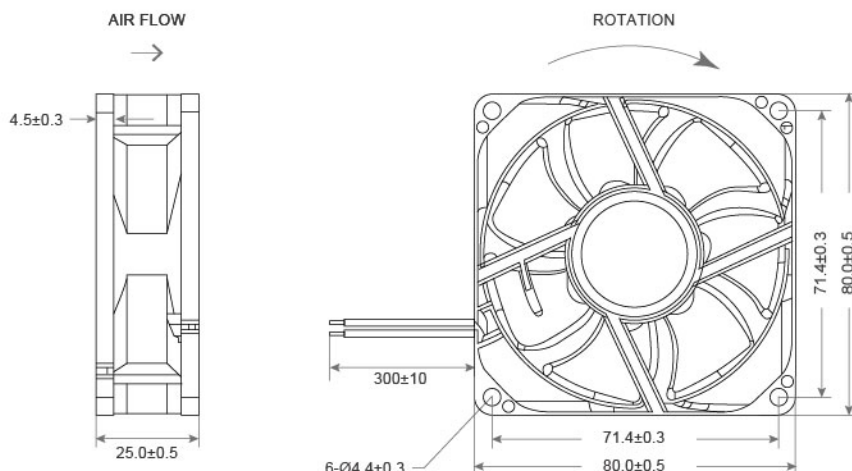

P&Q Curve At Rated Voltage

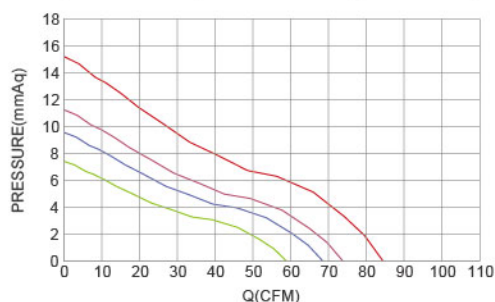

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRS8025x12L	※ ★ ◎	12 (7.0~14.0)	0.12	1.44	3000	43.23	1.22	3.77	0.15	29.9
TRS8025x12M	※ ★ ◎	12 (7.0~14.0)	0.18	2.16	3600	51.59	1.46	5.37	0.21	36.2
TRS8025x12H	※ ★ ◎	12 (7.0~14.0)	0.28	3.36	4200	59.96	1.70	7.25	0.29	39.4
TRS8025x12VH	※ ◎	12 (7.0~14.0)	0.35	4.20	4800	68.33	1.93	9.42	0.37	42.0
TRS8025x12SH	※ ◎	12 (7.0~14.0)	0.44	5.28	5200	73.91	2.09	11.02	0.43	44.5
TRS8025x12UH	※ ◎	12 (7.0~14.0)	0.64	7.68	6200	83.52	2.36	15.09	0.59	49.4
TRS8025x24L	※ ★ ◎	24 (15.0~27.0)	0.06	1.44	3000	43.23	1.22	3.77	0.15	29.9
TRS8025x24M	※ ★ ◎	24 (15.0~27.0)	0.09	2.16	3600	51.59	1.46	5.37	0.21	36.2
TRS8025x24H	※ ★ ◎	24 (15.0~27.0)	0.14	3.36	4200	59.96	1.70	7.25	0.29	39.4
TRS8025x24VH	※ ◎	24 (15.0~27.0)	0.18	4.20	4800	68.33	1.93	9.42	0.37	42.0
TRS8025x24SH	※ ◎	24 (15.0~27.0)	0.22	5.28	5200	73.91	2.09	11.02	0.43	44.5
TRS8025x24UH	※ ◎	24 (15.0~27.0)	0.32	7.68	6200	83.52	2.36	15.09	0.59	49.4
TRS8025x48L	※ ★ ◎	48 (35.0~57.0)	0.03	1.44	3000	43.23	1.22	3.77	0.15	29.9
TRS8025x48M	※ ★ ◎	48 (35.0~57.0)	0.05	2.16	3600	51.59	1.46	5.37	0.21	36.2
TRS8025x48H	※ ★ ◎	48 (35.0~57.0)	0.07	3.36	4200	59.96	1.70	7.25	0.29	39.4
TRS8025x48VH	※ ◎	48 (35.0~57.0)	0.09	4.20	4800	68.33	1.93	9.42	0.37	42.0
TRS8025x48SH	※ ◎	48 (35.0~57.0)	0.11	5.28	5200	73.91	2.09	11.02	0.43	44.5
TRS8025x48UH	※ ◎	48 (35.0~57.0)	0.16	7.68	6200	83.52	2.36	15.09	0.59	49.4





⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. A60




DIMENSIONS DRAWING UNIT : mm

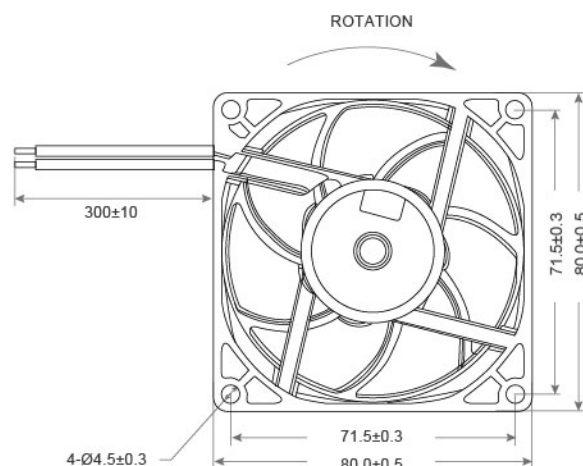

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 75g
風扇單體重量：75克




P&Q Curve At Rated Voltage

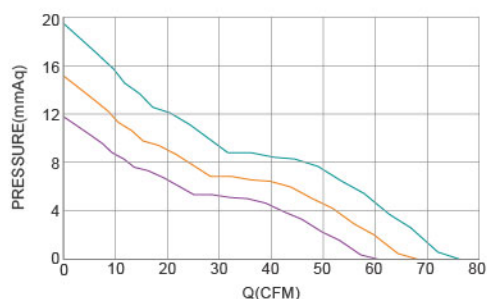

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRD8025x12L	※★◎	12 (7.0~14.0)	0.06	0.72	3700	35.72	1.01	7.95	0.31	29.9
TRD8025x12M	※★◎	12 (7.0~14.0)	0.18	2.16	4500	43.44	1.23	11.76	0.46	33.0
TRD8025x12H	※★◎	12 (7.0~14.0)	0.25	3.00	5200	50.20	1.42	15.70	0.62	38.0
TRD8025x12VH	※★◎	12 (7.0~14.0)	0.28	3.36	5900	56.96	1.61	20.21	0.80	42.8
TRD8025x12SH	※★◎	12 (7.0~14.0)	0.36	4.32	6600	63.72	1.80	25.29	1.00	47.8
TRD8025x24L	※★◎	24 (15.0~27.0)	0.03	0.72	3700	35.72	1.01	7.95	0.31	29.9
TRD8025x24M	※★◎	24 (15.0~27.0)	0.05	1.20	4500	43.44	1.23	11.76	0.46	33.0
TRD8025x24H	※★◎	24 (15.0~27.0)	0.10	2.40	5200	50.20	1.42	15.70	0.62	38.0
TRD8025x24VH	※★◎	24 (15.0~27.0)	0.14	3.36	5900	56.96	1.61	20.21	0.80	42.8
TRD8025x24SH	※★◎	24 (15.0~27.0)	0.18	4.32	6600	63.72	1.80	25.29	1.00	47.8
TRD8025x48M	※★◎	48 (35.0~57.0)	0.03	1.20	4500	43.44	1.23	11.76	0.46	33.0
TRD8025x48H	※★◎	48 (35.0~57.0)	0.05	2.40	5200	50.20	1.42	15.70	0.62	38.0
TRD8025x24VH	※★◎	48 (35.0~57.0)	0.07	3.36	5900	56.96	1.61	20.21	0.80	42.8
TRD8025x48SH	※★◎	48 (35.0~57.0)	0.09	4.32	6600	63.72	1.80	25.29	1.00	47.8


Optional Frames :




⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A61 ★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.




DIMENSIONS DRAWING UNIT : mm

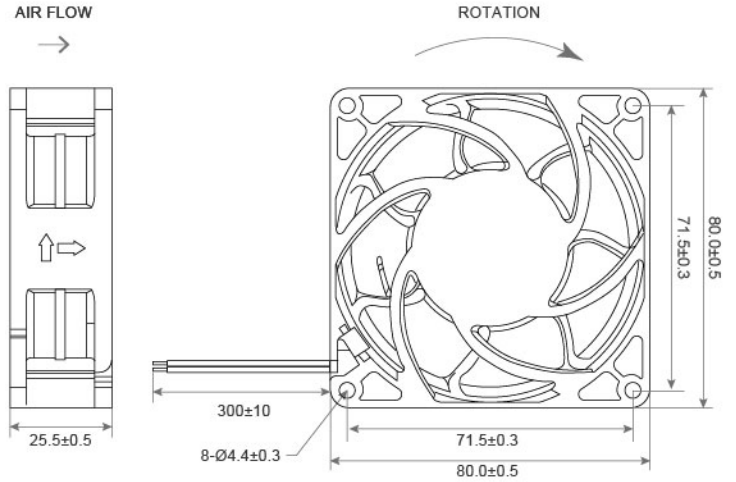

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※ Sleeve · ★ WRB · ◎ Two Ball Bearing
軸承：※ 含油 · ★ WRB · ◎ 滾珠軸承
- Unit Weight : 75g
風扇單體重量：75克



P&Q Curve At Rated Voltage


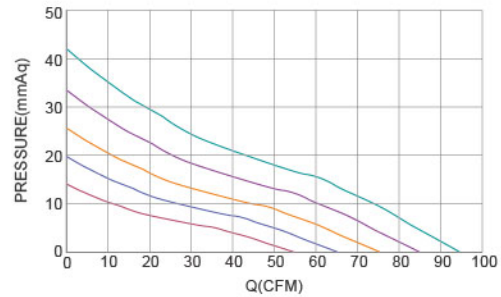


Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRD8025x12L	※★◎	12 (7.0~14.0)	0.28	3.36	5500	54.60	1.55	14.05	0.55	43.21
TRD8025x12M	※★◎	12 (7.0~14.0)	0.43	5.16	6500	64.53	1.83	19.62	0.77	47.51
TRD8025x12H	※★◎	12 (7.0~14.0)	0.64	7.68	7500	74.45	2.11	26.12	1.03	53.57
TRD8025x12VH	※★◎	12 (7.0~14.0)	0.97	11.64	8500	84.38	2.39	33.55	1.32	57.42
TRD8025x12SH	※★◎	12 (7.0~14.0)	1.35	16.20	9500	94.31	2.68	41.91	1.65	62.01
TRD8025x24L	※★◎	24 (15.0~27.0)	0.14	3.36	5500	54.60	1.55	14.05	0.55	43.21
TRD8025x24M	※★◎	24 (15.0~27.0)	0.22	5.28	6500	64.53	1.83	19.62	0.77	47.51
TRD8025x24H	※★◎	24 (15.0~27.0)	0.32	7.68	7500	74.45	2.11	26.12	1.03	53.57
TRD8025x24VH	※★◎	24 (15.0~27.0)	0.49	11.76	8500	84.38	2.39	33.55	1.32	57.42
TRD8025x24SH	※★◎	24 (15.0~27.0)	0.68	16.32	9500	94.31	2.68	41.91	1.65	62.01
TRD8025x48L	※★◎	48 (35.0~57.0)	0.07	3.36	5500	54.60	1.55	14.05	0.55	43.21
TRD8025x48M	※★◎	48 (35.0~57.0)	0.11	5.28	6500	64.53	1.83	19.62	0.77	47.51
TRD8025x48H	※★◎	48 (35.0~57.0)	0.16	7.68	7500	74.45	2.11	26.12	1.03	53.57
TRD8025x24VH	※★◎	48 (35.0~57.0)	0.25	11.76	8500	84.38	2.39	33.55	1.32	57.42
TRD8025x48SH	※★◎	48 (35.0~57.0)	0.34	16.32	9500	94.31	2.68	41.91	1.65	62.01

DC Axial Fan Sx08025 SERIES 80X80X25mm



- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ◎Two Ball bearing
軸承：※含油 · ◎滾珠軸承
- Unit Weight : 74.0g
風扇單體重量：74.0克

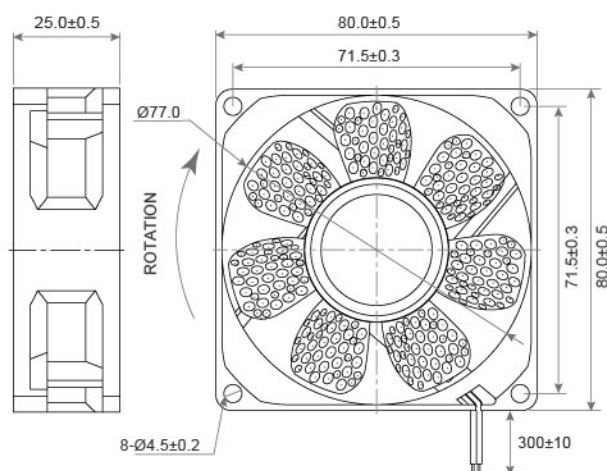
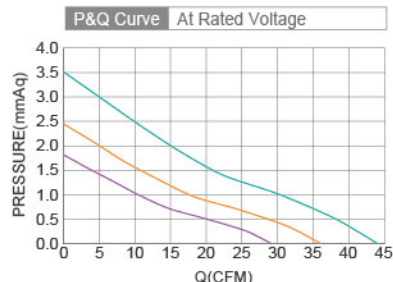


Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
Sx0802512LG	※◎	12 (6.0~13.8)	0.12	1.44	2000	29.11	0.82	1.86	0.07	19.5
Sx0802512MG	※◎	12 (6.0~13.8)	0.17	2.04	2500	36.04	1.02	2.46	0.10	22.6
Sx0802512HG	※◎	12 (6.0~13.8)	0.23	2.76	3000	44.09	1.25	3.54	0.14	30.3

DC Axial Fan SRL8025 SERIES 80X80X25mm



- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 67.4g
風扇單體重量：67.4克

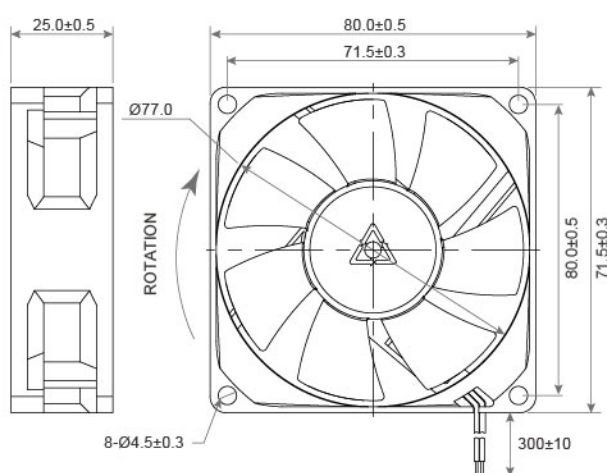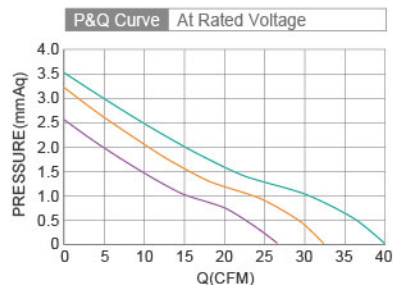

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
SRLx01138812L	※★◎	12 (6.0~13.8)	0.12	1.44	2000	26.54	0.75	2.61	0.10	21.0
SRLx01138812M	※★◎	12 (6.0~13.8)	0.17	2.04	2500	32.37	0.92	3.26	0.13	27.4
SRLx01138812H	※★◎	12 (6.0~13.8)	0.23	2.76	3000	39.80	1.13	3.58	0.14	32.6
SRLx01138824L	※★◎	24 (12.0~26.0)	0.08	1.92	2000	26.54	0.75	2.61	0.10	21.0
SRLx01138824M	※★◎	24 (12.0~26.0)	0.12	2.88	2500	32.37	0.92	3.26	0.13	27.4
SRLx01138824H	※★◎	24 (12.0~26.0)	0.17	4.08	3000	39.80	1.13	3.58	0.14	32.6


⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. ■ A62




DIMENSIONS DRAWING UNIT : mm

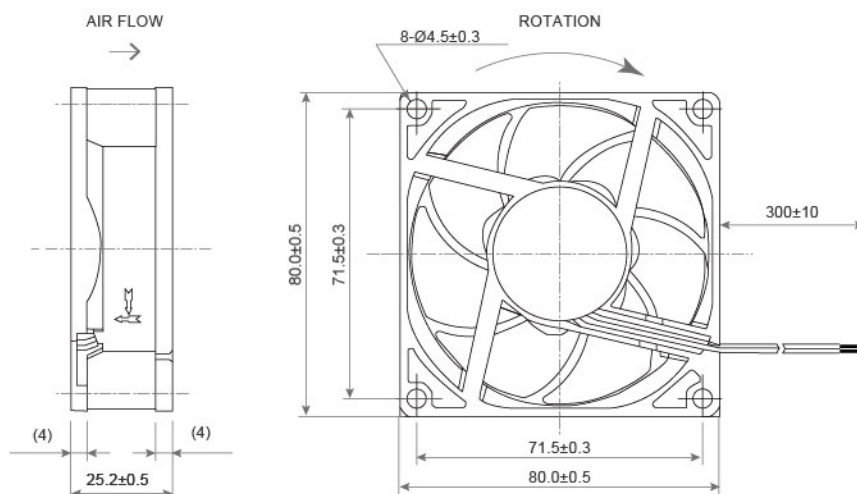

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve ★WRB ◎Two Ball Bearing
軸承：※含油 ★WRB ◎滾珠軸承
- Unit Weight : 110g
風扇單體重量：110克



P&Q Curve At Rated Voltage

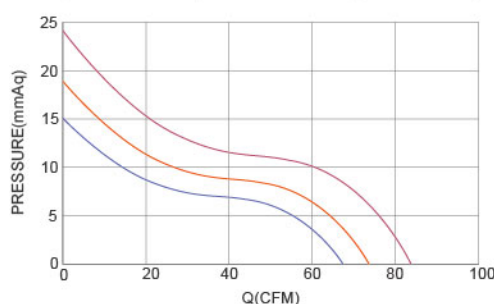

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRY8025x12D	※◎★	12 (8.0~13.2)	0.06	0.72	1500	14.8	0.42	0.74	0.03	17.0
TRY8025x12L	※◎★	12 (8.0~13.2)	0.08	0.96	2100	20.4	0.58	1.46	0.06	19.0
TRY8025x12M	※◎★	12 (8.0~13.2)	0.12	1.44	2800	27.5	0.78	2.59	0.10	23.0
TRY8025x12H	※◎★	12 (8.0~13.2)	0.18	2.16	3500	35.5	1.01	4.13	0.16	28.0
TRY8025x12VH	※◎★	12 (8.0~13.2)	0.22	2.64	5200	51.5	1.46	8.94	0.35	38.0
TRY8025x12SH	※◎★	12 (8.0~13.2)	0.48	5.76	6800	67.4	1.91	15.30	0.60	45.0
TRY8025x12XH	※◎★	12 (8.0~13.2)	0.60	7.20	7400	73.0	2.07	18.11	0.71	48.0
TRY8025x12HH	※◎★	12 (8.0~13.2)	0.70	8.40	8400	83.1	2.36	24.13	0.95	54.0
TRY8025x24D	※◎★	24 (14.5~27.5)	0.02	0.72	1500	14.8	0.42	0.74	0.03	17.0
TRY8025x24L	※◎★	24 (14.5~27.5)	0.04	0.96	2100	20.4	0.58	1.46	0.06	19.0
TRY8025x24M	※◎★	24 (14.5~27.5)	0.06	1.44	2800	27.5	0.78	2.59	0.10	23.0
TRY8025x24H	※◎★	24 (14.5~27.5)	0.09	2.16	3500	35.5	1.01	4.13	0.16	28.0
TRY8025x24VH	※◎★	24 (14.5~27.5)	0.10	2.64	5200	51.5	1.46	8.94	0.35	38.0
TRY8025x24SH	※◎★	24 (14.5~27.5)	0.21	5.76	6800	67.4	1.91	15.30	0.60	45.0
TRY8025x24XH	※◎★	24 (14.5~27.5)	0.28	7.20	7400	73.0	2.07	18.11	0.71	48.0
TRY8025x24HH	※◎★	24 (14.5~27.5)	0.35	8.40	8400	83.1	2.36	24.13	0.95	54.0
TRY8025x24VH	※◎★	48 (29.0~55.0)	0.05	2.64	5200	51.5	1.46	8.94	0.35	38.0
TRY8025x24SH	※◎★	48 (29.0~55.0)	0.11	5.76	6800	67.4	1.91	15.30	0.60	45.0
TRY8025x24XH	※◎★	48 (29.0~55.0)	0.14	7.20	7400	73.0	2.07	18.11	0.71	48.0
TRY8025x24HH	※◎★	48 (29.0~55.0)	0.18	8.40	8400	83.1	2.36	24.13	0.95	54.0


⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A63 ★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.




DIMENSIONS DRAWING UNIT : mm

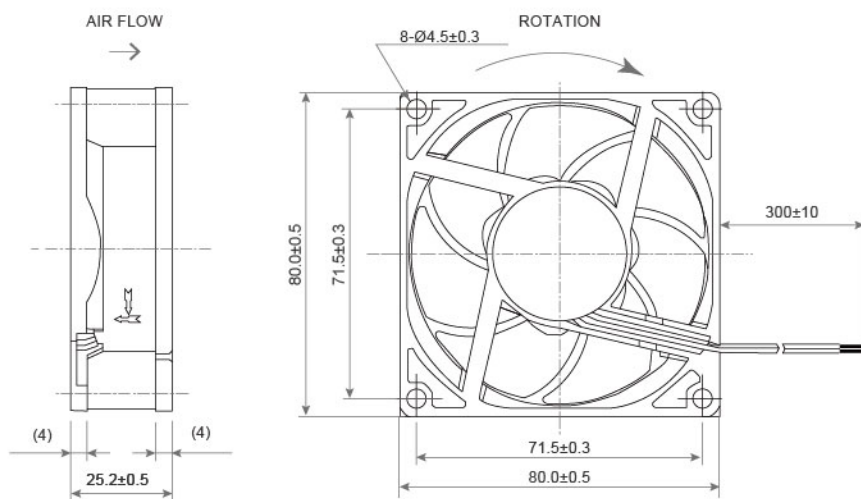

- Frame : Aluminum
外框材質：鋁框
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 140g
風扇單體重量：140克



P&Q Curve At Rated Voltage

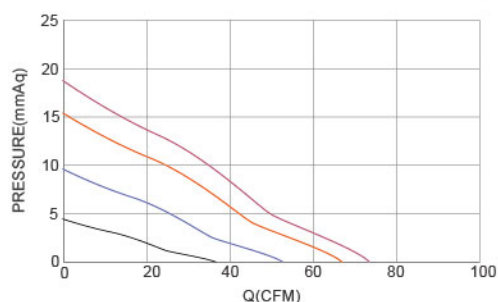

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRY8025x12L	※◎★	12 (7.0~13.5)	0.40	4.80	6000	57.50	1.63	9.90	0.39	42.5
TRY8025x12M	※◎★	12 (7.0~13.5)	0.50	6.00	7000	68.90	1.96	15.75	0.62	45.5
TRY8025x12H	※◎★	12 (7.0~13.5)	0.65	7.80	8000	78.60	2.23	20.32	0.80	51.0
TRY8025x12VH	※◎★	12 (7.0~13.5)	0.85	10.20	9000	89.20	2.53	25.91	1.02	55.0
TRY8025x12SH	※◎★	12 (7.0~13.5)	1.00	12.00	10000	93.50	2.65	28.45	1.12	59.0
TRY8025x12XH	※◎★	12 (7.0~13.5)	2.40	28.80	11000	122.14	3.46	49.53	1.95	62.5
TRY8025x24L	※◎★	24 (14.5~27.5)	0.20	4.80	6000	57.50	1.63	9.90	0.39	42.5
TRY8025x24M	※◎★	24 (14.5~27.5)	0.25	6.00	7000	68.90	1.96	15.75	0.62	45.5
TRY8025x24H	※◎★	24 (14.5~27.5)	0.33	7.80	8000	78.60	2.23	20.32	0.80	51.0
TRY8025x24VH	※◎★	24 (14.5~27.5)	0.43	10.20	9000	89.20	2.53	25.91	1.02	55.0
TRY8025x24SH	※◎★	24 (14.5~27.5)	0.50	12.00	10000	93.50	2.65	28.45	1.12	59.0
TRY8025x24XH	※◎★	24 (14.5~27.5)	1.20	28.80	11000	122.14	3.46	49.53	1.95	62.5
TRY8025x48L	※◎★	48 (29.0~55.0)	0.10	4.80	6000	57.50	1.63	9.90	0.39	42.5
TRY8025x48M	※◎★	48 (29.0~55.0)	0.13	6.00	7000	68.90	1.96	15.75	0.62	45.5
TRY8025x48H	※◎★	48 (29.0~55.0)	0.17	7.80	8000	78.60	2.23	20.32	0.80	51.0
TRY8025x48VH	※◎★	48 (29.0~55.0)	0.22	10.20	9000	89.20	2.53	25.91	1.02	55.0
TRY8025x48SH	※◎★	48 (29.0~55.0)	0.25	12.00	10000	93.50	2.65	28.45	1.12	59.0
TRY8025x48XH	※◎★	48 (29.0~55.0)	0.60	28.80	11000	122.14	3.46	49.53	1.95	62.5



⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A63 ★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.




DIMENSIONS DRAWING UNIT : mm

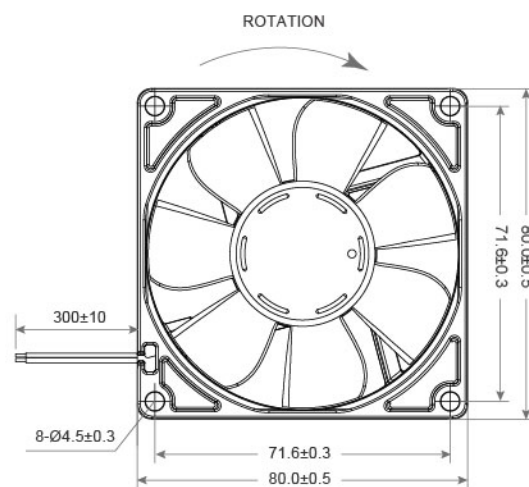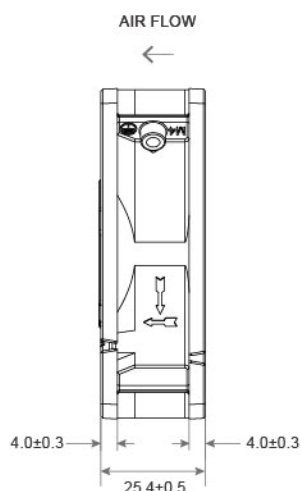

- Frame : Aluminum
外框材質：鋁框
- Impeller : Metal
扇葉材質：金屬扇葉
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 200g
風扇單體重量：200克



P&Q Curve At Rated Voltage

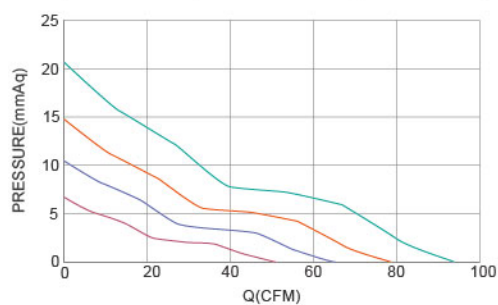

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRY8025x12L	※◎★	12 (7.5~13.2)	0.24	2.88	4000	51.37	1.45	6.98	0.271	40
TRY8025x12M	※◎★	12 (7.5~13.2)	0.40	4.80	5000	65.16	1.85	10.35	0.407	45
TRY8025x12H	※◎★	12 (7.5~13.2)	0.60	7.20	6000	77.98	2.21	14.63	0.575	50
TRY8025x12VH	※◎★	12 (7.5~13.2)	1.00	12.00	7200	93.45	2.65	20.83	0.820	55
TRY8025x24L	※◎★	24 (14.5~27.5)	0.12	2.88	4000	51.37	1.45	6.98	0.271	40
TRY8025x24M	※◎★	24 (14.5~27.5)	0.20	4.80	5000	65.16	1.85	10.35	0.407	45
TRY8025x24H	※◎★	24 (14.5~27.5)	0.30	7.20	6000	77.98	2.21	14.63	0.575	50
TRY8025x24VH	※◎★	24 (14.5~27.5)	0.50	12.00	7200	93.45	2.65	20.83	0.820	55
TRY8025x48L	※◎★	48 (36.0~57.0)	0.06	2.88	4000	51.37	1.45	6.98	0.271	40
TRY8025x48M	※◎★	48 (36.0~57.0)	0.10	4.80	5000	65.16	1.85	10.35	0.407	45
TRY8025x48H	※◎★	48 (36.0~57.0)	0.15	7.20	6000	77.98	2.21	14.63	0.575	50
TRY8025x48VH	※◎★	48 (36.0~57.0)	0.25	12.00	7200	93.45	2.65	20.83	0.820	55

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

■ A63 ★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.