

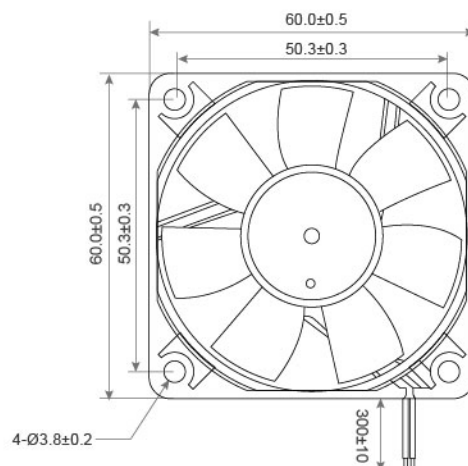



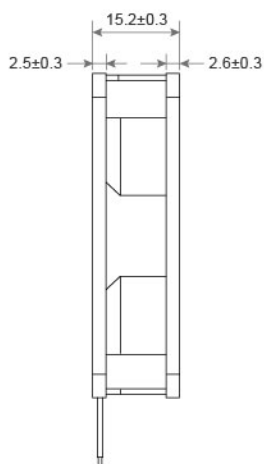


- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※ Sleeve · ★ WRB · ◎ Two Ball Bearing  
軸承：※ 含油 · ★ WRB · ◎ 滾珠軸承
- Unit Weight : 30g  
風扇單體重量：30克

P&Q Curve At Rated Voltage

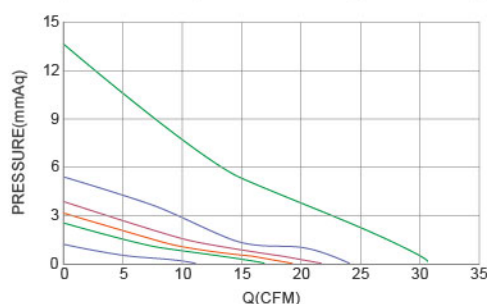


| Model No.    | Bearing Type | Voltage (VDC)  | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m <sup>3</sup> /min) | Air Pressure (mmH <sub>2</sub> O) | Air Pressure (Inch H <sub>2</sub> O) | Noise (dBA) |
|--------------|--------------|----------------|-------------|-----------|-------------|----------------|--------------------------------|-----------------------------------|--------------------------------------|-------------|
| TRY6015x12L  | ※★◎          | 12 (7.5~13.2)  | 0.04        | 0.48      | 2650        | 11.15          | 0.31                           | 1.19                              | 0.05                                 | 16.0        |
| TRY6015x12M  | ※★◎          | 12 (7.5~13.2)  | 0.09        | 1.09      | 3900        | 17.01          | 0.48                           | 2.46                              | 0.10                                 | 27.0        |
| TRY6015x12H  | ※★◎          | 12 (7.5~13.2)  | 0.13        | 1.56      | 4500        | 19.36          | 0.55                           | 3.10                              | 0.12                                 | 31.0        |
| TRY6015x12VH | ※★◎          | 12 (7.5~13.2)  | 0.18        | 2.16      | 5100        | 21.80          | 0.62                           | 3.81                              | 0.15                                 | 35.0        |
| TRY6015x12SH | ※★◎          | 12 (7.5~13.2)  | 0.24        | 2.88      | 5700        | 24.20          | 0.69                           | 5.33                              | 0.21                                 | 39.5        |
| TRY6015x12UH | ※★◎          | 12 (7.5~13.2)  | 0.32        | 3.84      | 7000        | 30.50          | 0.87                           | 13.97                             | 0.55                                 | 47.5        |
| TRY6015x12L  | ※★◎          | 24 (14.0~26.2) | 0.02        | 0.48      | 2650        | 11.15          | 0.31                           | 1.19                              | 0.05                                 | 16.0        |
| TRY6015x12M  | ※★◎          | 24 (14.0~26.2) | 0.04        | 0.96      | 3900        | 17.01          | 0.48                           | 2.46                              | 0.10                                 | 27.0        |
| TRY6015x12H  | ※★◎          | 24 (14.0~26.2) | 0.07        | 1.56      | 4500        | 19.36          | 0.55                           | 3.10                              | 0.12                                 | 31.0        |
| TRY6015x12VH | ※★◎          | 24 (14.0~26.2) | 0.09        | 2.16      | 5100        | 21.80          | 0.62                           | 3.81                              | 0.15                                 | 35.0        |
| TRY6015x12SH | ※★◎          | 24 (14.0~26.2) | 0.12        | 2.88      | 5700        | 24.20          | 0.69                           | 5.33                              | 0.21                                 | 39.5        |
| TRY6015x12UH | ※★◎          | 24 (14.0~26.2) | 0.16        | 3.84      | 7000        | 30.50          | 0.87                           | 13.97                             | 0.55                                 | 47.5        |

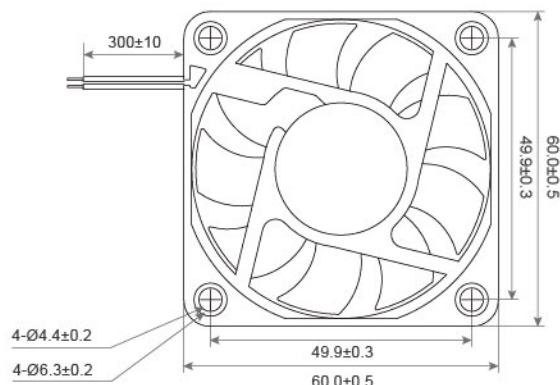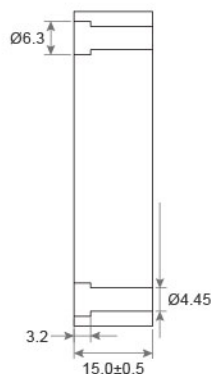

- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing  
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 38g  
風扇單體重量：38克

P&Q Curve At Rated Voltage

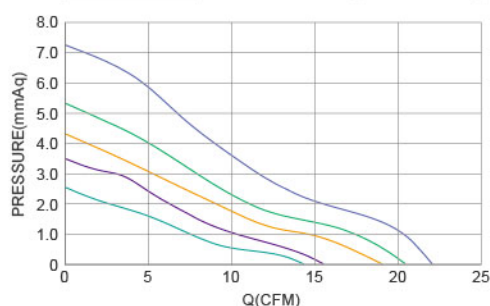

| Model No.    | Bearing Type | Voltage (VDC)  | Current (A) | Power (W) | Speed (RPM) | Air Flow |                       | Air Pressure         |                         | Noise (dBA) |
|--------------|--------------|----------------|-------------|-----------|-------------|----------|-----------------------|----------------------|-------------------------|-------------|
|              |              |                |             |           |             | (CFM)    | (m <sup>3</sup> /min) | (mmH <sub>2</sub> O) | (Inch H <sub>2</sub> O) |             |
| TRM6015x5L   | ※★◎          | 5 (1.8~6.0)    | 0.14        | 0.72      | 2000        | 9.41     | 0.268                 | 1.34                 | 0.053                   | 21.1        |
| TRM6015x5M   | ※★◎          | 5 (1.8~6.0)    | 0.19        | 0.96      | 3000        | 11.5     | 0.328                 | 1.86                 | 0.073                   | 24.8        |
| TRM6015x5H   | ※★◎          | 5 (1.8~6.0)    | 0.24        | 1.20      | 3500        | 14.2     | 0.406                 | 2.61                 | 0.103                   | 29.8        |
| TRM6015x5VH  | ※★◎          | 5 (1.8~6.0)    | 0.29        | 1.44      | 4000        | 16.4     | 0.468                 | 3.50                 | 0.138                   | 31.2        |
| TRM6015x12L  | ※★◎          | 12 (7.0~13.5)  | 0.06        | 0.72      | 2000        | 9.4      | 0.268                 | 1.34                 | 0.053                   | 21.1        |
| TRM6015x12M  | ※★◎          | 12 (7.0~13.5)  | 0.08        | 0.96      | 3000        | 11.5     | 0.328                 | 1.86                 | 0.073                   | 24.8        |
| TRM6015x12H  | ※★◎          | 12 (7.0~13.5)  | 0.10        | 1.20      | 3500        | 14.2     | 0.406                 | 2.61                 | 0.103                   | 29.8        |
| TRM6015x12VH | ※★◎          | 12 (7.0~13.5)  | 0.12        | 1.44      | 4000        | 16.4     | 0.468                 | 3.50                 | 0.138                   | 31.2        |
| TRM6015x12SH | ※★◎          | 12 (7.0~13.5)  | 0.14        | 1.68      | 4500        | 18.3     | 0.524                 | 4.35                 | 0.171                   | 34.8        |
| TRM6015x12UH | ※★◎          | 12 (7.0~13.5)  | 0.16        | 1.92      | 5000        | 20.5     | 0.584                 | 5.34                 | 0.210                   | 36.6        |
| TRM6015x12XH | ※★◎          | 12 (7.0~13.5)  | 0.20        | 2.40      | 6000        | 22.4     | 0.640                 | 7.33                 | 0.289                   | 41.0        |
| TRM6015x24L  | ※★◎          | 24 (18.0~26.5) | 0.03        | 0.72      | 2000        | 9.4      | 0.268                 | 1.34                 | 0.053                   | 21.1        |
| TRM6015x24M  | ※★◎          | 24 (18.0~26.5) | 0.04        | 0.96      | 3000        | 11.5     | 0.328                 | 1.86                 | 0.073                   | 24.8        |
| TRM6015x24H  | ※★◎          | 24 (18.0~26.5) | 0.05        | 1.20      | 3500        | 14.2     | 0.406                 | 2.61                 | 0.103                   | 29.8        |
| TRM6015x24VH | ※★◎          | 24 (18.0~26.5) | 0.06        | 1.44      | 4000        | 16.4     | 0.468                 | 3.50                 | 0.138                   | 31.2        |
| TRM6015x24SH | ※★◎          | 24 (18.0~26.5) | 0.07        | 1.68      | 4500        | 18.3     | 0.524                 | 4.35                 | 0.171                   | 34.8        |
| TRM6015x24UH | ※★◎          | 24 (18.0~26.5) | 0.08        | 1.92      | 5000        | 20.5     | 0.584                 | 5.34                 | 0.210                   | 36.6        |
| TRM6015x24XH | ※★◎          | 24 (18.0~26.5) | 0.10        | 2.40      | 6000        | 22.4     | 0.640                 | 7.33                 | 0.289                   | 41.0        |