





DIMENSIONS DRAWING UNIT : mm

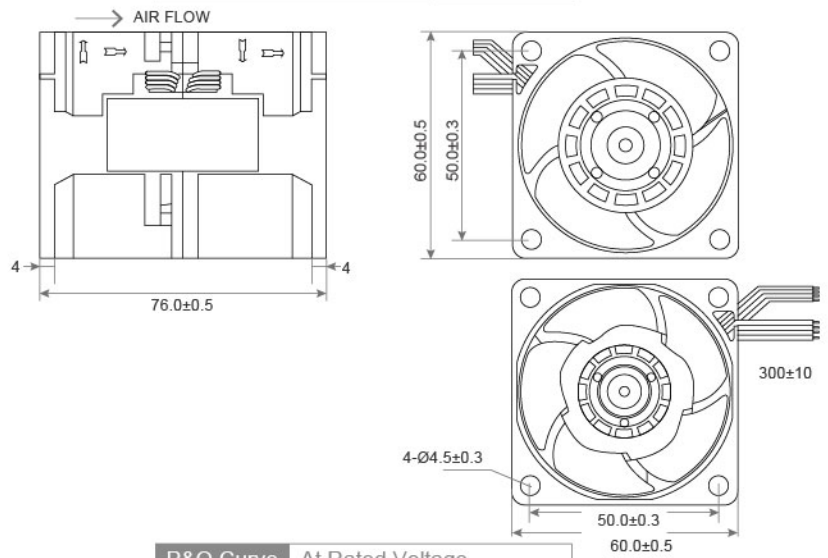

P&Q Curve At Rated Voltage

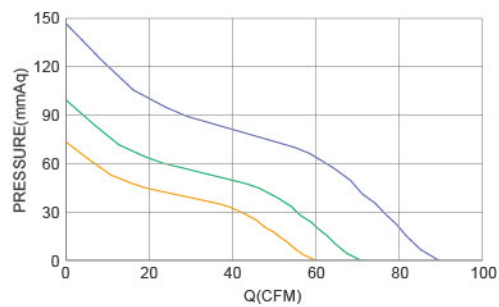

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 260g
風扇單體重量：260克

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRF6076x12L	※◎★	12 (9.5~13.2)	3.75	45.0	14000 / 11000	60.0	1.70	73.4	2.9	69.0
TRF6076x12M	※◎★	12 (9.5~13.2)	3.20	38.4	16000 / 12500	70.6	2.01	101.6	4.0	75.0
TRF6076x12H	※◎★	12 (9.5~13.2)	3.20	38.4	20000 / 14500	88.6	2.51	147.3	5.8	79.0

◎ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. A145