


DC Frameless Fan


TRM5010 SERIES Ø50mm

DIMENSIONS DRAWING UNIT : mm

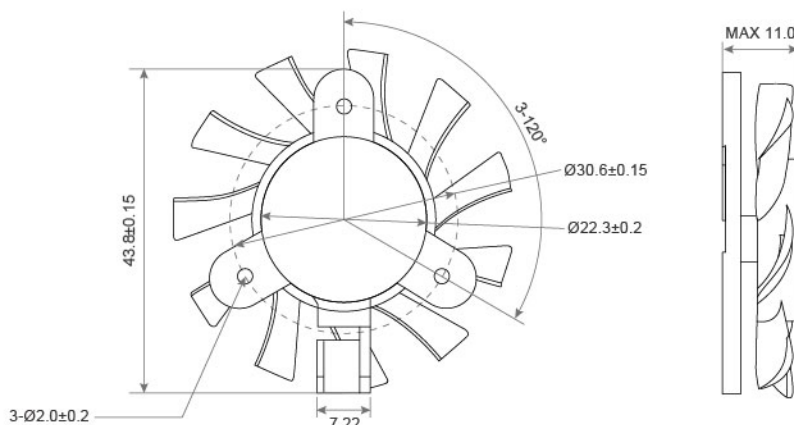

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※ Sleeve · ★ WRB · ◎ Two Ball Bearing
軸承：※ 含油 · ★ WRB · ◎ 滾珠軸承
- Unit Weight : 12g
風扇單體重量：12克

P&Q Curve At Rated Voltage

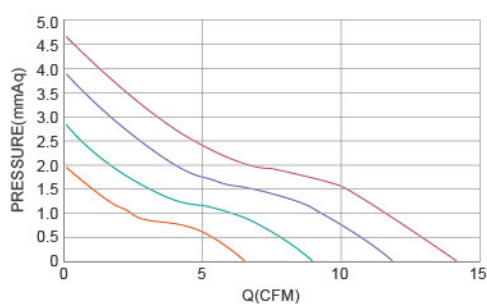

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRM5010x05L	※★◎	5 (1.8~6.0)	0.12	0.60	4000	6.45	0.18	1.96	0.08	27.0
TRM5010x05M	※★◎	5 (1.8~6.0)	0.22	1.10	5000	8.97	0.25	2.84	0.11	30.5
TRM5010x05H	※★◎	5 (1.8~6.0)	0.28	1.40	6000	11.77	0.33	3.85	0.15	33.8
TRM5010x12L	※★◎	12 (6.0~13.5)	0.05	0.60	4000	6.45	0.18	1.96	0.08	27.0
TRM5010x12M	※★◎	12 (6.0~13.5)	0.09	1.08	5000	8.97	0.25	2.84	0.11	30.5
TRM5010x12H	※★◎	12 (6.0~13.5)	0.15	1.80	6000	11.77	0.33	3.85	0.15	33.8
TRM5010x12VH	※★◎	12 (6.0~13.5)	0.25	3.00	6500	14.13	0.40	4.70	0.19	35.5

※ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.