



# DC Frameless Fan TRM6010 SERIES Ø60mm

DIMENSIONS DRAWING UNIT : mm

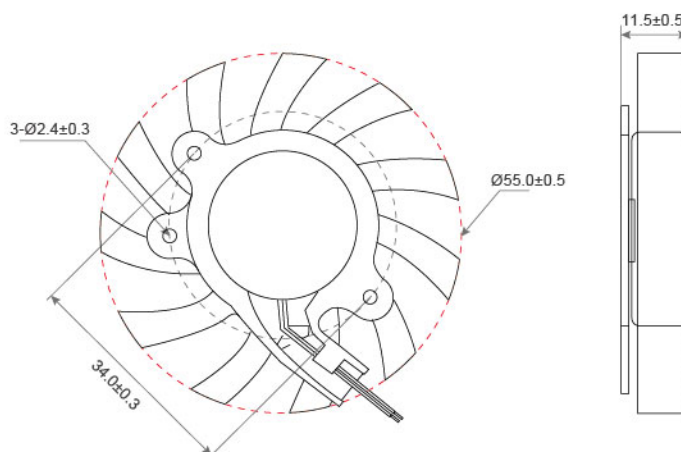

- Frame : Thermoplastic PBT UL94-V0  
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0  
扇葉材質：環保防火PBT
- Bearing : ※ Sleeve · ★ WRB · ◎ Two Ball Bearing  
軸承：※ 含油 · ★ WRB · ◎ 滾珠軸承
- Unit Weight : 13g  
風扇單體重量：13克

P&Q Curve At Rated Voltage

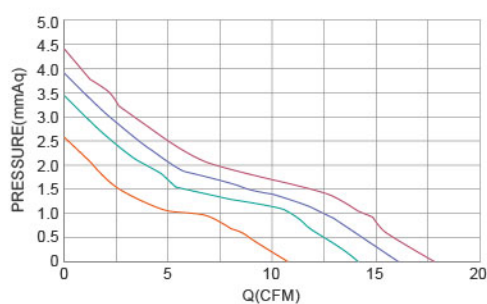

| Model No.    | Bearing Type | Voltage (VDC)  | Current (A) | Power (W) | Speed (RPM) | Air Flow (CFM) | Air Flow (m <sup>3</sup> /min) | Air Pressure (mmH <sub>2</sub> O) | Air Pressure (Inch H <sub>2</sub> O) | Noise (dBA) |
|--------------|--------------|----------------|-------------|-----------|-------------|----------------|--------------------------------|-----------------------------------|--------------------------------------|-------------|
| TRM6010x05L  | ※★◎          | 5 ( 1.8~6.0)   | 0.15        | 0.75      | 3000        | 10.74          | 0.31                           | 2.64                              | 0.10                                 | 21.6        |
| TRM6010x05M  | ※★◎          | 5 ( 1.8~6.0)   | 0.39        | 1.95      | 4000        | 14.32          | 0.41                           | 3.52                              | 0.14                                 | 28.8        |
| TRM6010x12L  | ※★◎          | 12 ( 6.0~13.5) | 0.06        | 0.72      | 3000        | 10.74          | 0.31                           | 2.64                              | 0.10                                 | 21.6        |
| TRM6010x12M  | ※★◎          | 12 ( 6.0~13.5) | 0.15        | 1.78      | 4000        | 14.32          | 0.41                           | 3.52                              | 0.14                                 | 28.8        |
| TRM6010x12H  | ※★◎          | 12 ( 6.0~13.5) | 0.25        | 3.00      | 4500        | 16.11          | 0.46                           | 3.97                              | 0.16                                 | 30.8        |
| TRM6010x12VH | ※★◎          | 12 ( 6.0~13.5) | 0.37        | 4.44      | 5000        | 17.89          | 0.51                           | 4.41                              | 0.17                                 | 33.1        |
| TRM6010x24L  | ※★◎          | 24 (16.0~26.5) | 0.03        | 0.72      | 3000        | 10.74          | 0.31                           | 2.64                              | 0.10                                 | 21.6        |
| TRM6010x24M  | ※★◎          | 24 (16.0~26.5) | 0.07        | 1.78      | 4000        | 14.32          | 0.41                           | 3.52                              | 0.14                                 | 28.8        |
| TRM6010x24H  | ※★◎          | 24 (16.0~26.5) | 0.12        | 2.88      | 4500        | 16.11          | 0.46                           | 3.97                              | 0.16                                 | 30.8        |
| TRM6010x24VH | ※★◎          | 24 (16.0~26.5) | 0.18        | 4.22      | 5000        | 17.89          | 0.51                           | 4.41                              | 0.17                                 | 33.1        |

※ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.