



DC Frameless Fan

TRM9225 SERIES Ø92mm

DIMENSIONS DRAWING UNIT : mm

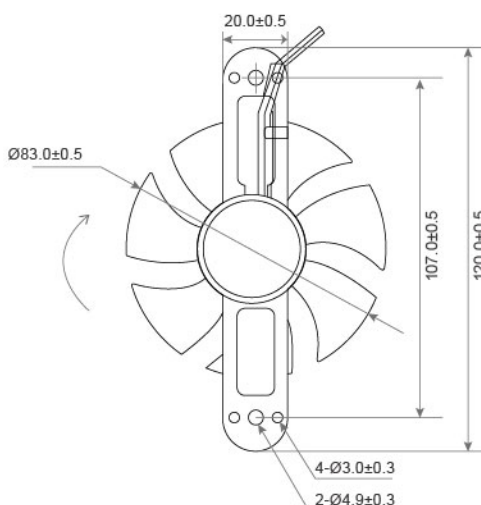

P&Q Curve At Rated Voltage

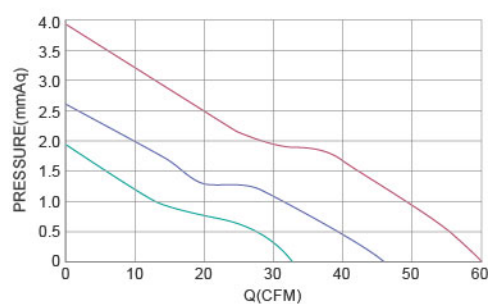

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※Sleeve · ★WRB · ◎Two Ball Bearing
軸承：※含油 · ★WRB · ◎滾珠軸承
- Unit Weight : 48g
風扇單體重量：48克

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow		Air Pressure		Noise (dBA)
						(CFM)	(m ³ /min)	(mmH ₂ O)	(Inch H ₂ O)	
TRM9225x12L	※★◎	12 (6.0~13.5)	0.11	1.32	2000	32.6	0.92	1.9	0.07	27.0
TRM9225x12M	※★◎	12 (6.0~13.5)	0.15	1.80	2500	45.8	1.30	2.6	0.10	32.0
TRM9225x12H	※★◎	12 (6.0~13.5)	0.22	2.64	3000	59.3	1.68	3.9	0.15	37.0
TRM9225x24L	※★◎	24 (16.0~26.5)	0.06	1.32	2000	32.6	0.92	1.9	0.07	27.0
TRM9225x24M	※★◎	24 (16.0~26.5)	0.08	1.80	2500	45.8	1.30	2.6	0.10	32.0
TRM9225x24H	※★◎	24 (16.0~26.5)	0.11	2.64	3000	59.3	1.68	3.9	0.15	37.0

※ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice.