




DC Frameless Fan 40X40X10mm

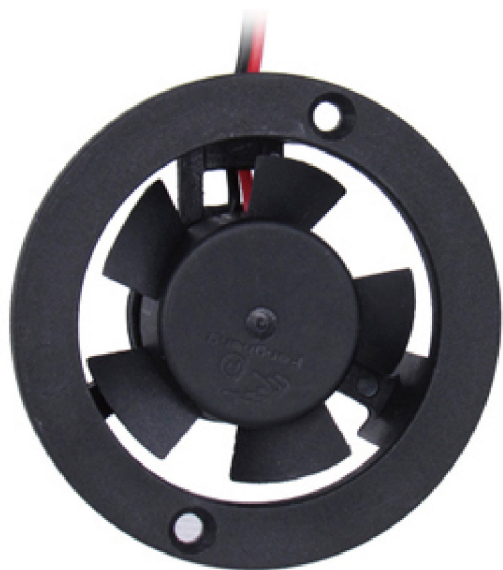

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing System : ※Sleeve · ★WRB · ◎Two Ball
軸承結構：※含油軸承 · ★專利軸承 · ◎滾珠軸承
- Unit Weight : 15g
風扇單體重量：15克

Model No.	Bearing Type	Voltage (VAC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	(m ³ /min)	Air Pressure (mmH ₂ O)	(Inch H ₂ O)	Noise (dBA)
SFH4010LL05	◎※★	5(3.5~6.8)	0.06	0.30	3500	3.20	0.09	2.17	0.09	15.6
SFH4010L05	◎※★	5(3.5~6.8)	0.09	0.45	5500	5.07	0.14	3.42	0.14	24.5
SFH4010M05	◎※★	5(3.5~6.8)	0.12	0.60	6500	7.24	0.20	4.70	0.18	28.6
SFH4010H05	◎※★	5(3.5~6.8)	0.15	0.75	7500	10.22	0.29	5.76	0.23	30.5
SFH4010HH05	◎※★	5(5.0~8.4)	0.20	1.00	18000	25.40	0.72	14.60	0.59	45.0
SFH4010LL12	◎※★	12(6.0~13.5)	0.04	0.48	3500	3.20	0.09	2.17	0.09	15.6
SFH4010L12	◎※★	12(6.0~13.5)	0.10	1.20	6000	5.10	0.15	3.50	0.15	25.0
SFH4010M12	◎※★	12(6.0~13.5)	0.12	1.44	7500	10.22	0.29	5.76	0.23	30.5
SFH4010H12	◎※★	12(6.0~13.5)	0.15	1.80	8000	11.29	0.32	6.49	0.26	33.4
SFH4010L24	◎※★	24(18.0~26.5)	0.03	0.72	3500	3.20	0.09	2.17	0.09	15.6
SFH4010M24	◎※★	24(18.0~26.5)	0.06	1.44	7500	10.22	0.29	5.76	0.23	30.5
SFH4010H24	◎※★	24(18.0~26.5)	0.08	1.92	8000	11.29	0.32	6.49	0.26	33.4


★產品詳細數據及功能請參閱承認書 Product have a detail in the approval sheet.

★產品規格變更不另行通知 Specifications are subject to change without notice.

⊗ Bearing System ◎ : Ball ※ : Sleeve ★ : WRB Bearing



DC Frameless Fan 40X40X10mm

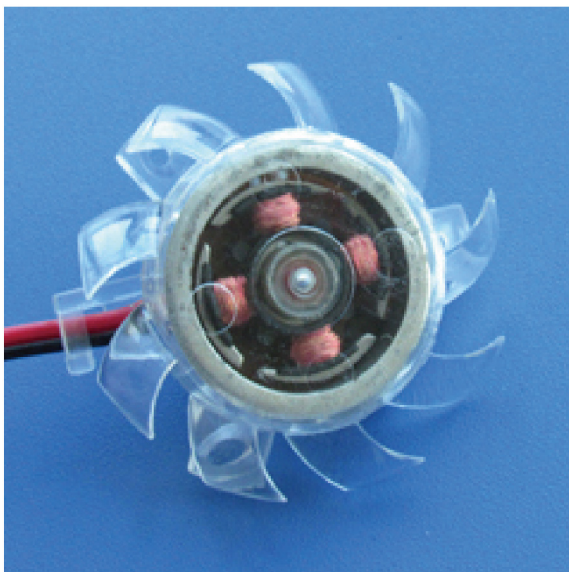

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing System : ※Sleeve · ★WRB · ◎Two Ball
軸承結構：※含油軸承 · ★專利軸承 · ◎滾珠軸承
- Unit Weight : 15g
風扇單體重量：15克


Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow		Air Pressure		Noise (dBA)
						(CFM)	(m ³ /min)	(mmH ₂ O)	(Inch H ₂ O)	
SFH4010LL05	◎※★	5(3.5~6.8)	0.06	0.30	3500	3.20	0.09	2.17	0.09	15.6
SFH4010L05	◎※★	5(3.5~6.8)	0.09	0.45	5500	5.07	0.14	3.42	0.14	24.5
SFH4010M05	◎※★	5(3.5~6.8)	0.12	0.60	6500	7.24	0.20	4.70	0.18	28.6
SFH4010H05	◎※★	5(3.5~6.8)	0.15	0.75	7500	10.22	0.29	5.76	0.23	30.5
SFH4010HH05	◎※★	5(5.0~8.4)	0.20	1.00	18000	25.40	0.72	14.60	0.59	45.0
SFH4010LL12	◎※★	12(6.0~13.5)	0.04	0.48	3500	3.20	0.09	2.17	0.09	15.6
SFH4010L12	◎※★	12(6.0~13.5)	0.10	1.20	6000	5.10	0.15	3.50	0.15	25.0
SFH4010M12	◎※★	12(6.0~13.5)	0.12	1.44	7500	10.22	0.29	5.76	0.23	30.5
SFH4010H12	◎※★	12(6.0~13.5)	0.15	1.80	8000	11.29	0.32	6.49	0.26	33.4
SFH4010L24	◎※★	24(18.0~26.5)	0.03	0.72	3500	3.20	0.09	2.17	0.09	15.6
SFH4010M24	◎※★	24(18.0~26.5)	0.06	1.44	7500	10.22	0.29	5.76	0.23	30.5
SFH4010H24	◎※★	24(18.0~26.5)	0.08	1.92	8000	11.29	0.32	6.49	0.26	33.4

★產品詳細數據及功能請參閱承認書 Product have a detail in the approval sheet.
★產品規格變更不另行通知 Specifications are subject to change without notice.

ⓧ Bearing System ◎ : Ball ※ : Sleeve ★ : WRB Bearing



DC Frameless Fan 40X40X10mm

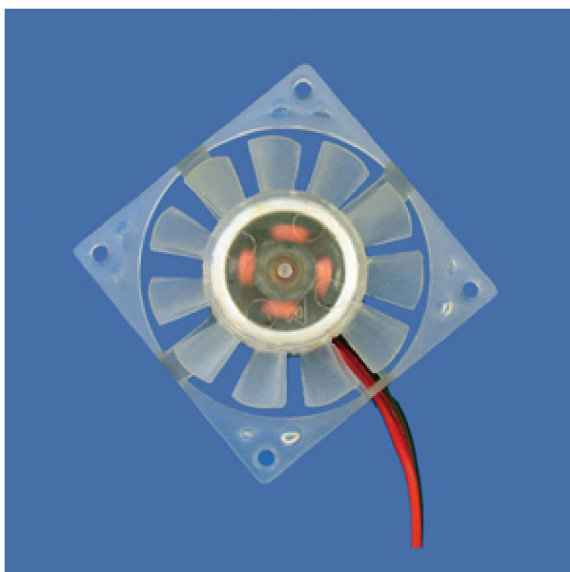

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing System : ※Sleeve · ★WRB · ◎Two Ball
軸承結構：※含油軸承 · ★專利軸承 · ◎滾珠軸承
- Unit Weight : 15g
風扇單體重量：15克

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow		Air Pressure		Noise (dBA)
						(CFM)	(m ³ /min)	(mmH ₂ O)	(Inch H ₂ O)	
SFH4010LL05	◎※★	5(3.5~6.8)	0.06	0.30	3500	3.20	0.09	2.17	0.09	15.6
SFH4010L05	◎※★	5(3.5~6.8)	0.09	0.45	5500	5.07	0.14	3.42	0.14	24.5
SFH4010M05	◎※★	5(3.5~6.8)	0.12	0.60	6500	7.24	0.20	4.70	0.18	28.6
SFH4010H05	◎※★	5(3.5~6.8)	0.15	0.75	7500	10.22	0.29	5.76	0.23	30.5
SFH4010HH05	◎※★	5(5.0~8.4)	0.20	1.00	18000	25.40	0.72	14.60	0.59	45.0
SFH4010LL12	◎※★	12(6.0~13.5)	0.04	0.48	3500	3.20	0.09	2.17	0.09	15.6
SFH4010L12	◎※★	12(6.0~13.5)	0.10	1.20	6000	5.10	0.15	3.50	0.15	25.0
SFH4010M12	◎※★	12(6.0~13.5)	0.12	1.44	7500	10.22	0.29	5.76	0.23	30.5
SFH4010H12	◎※★	12(6.0~13.5)	0.15	1.80	8000	11.29	0.32	6.49	0.26	33.4
SFH4010L24	◎※★	24(18.0~26.5)	0.03	0.72	3500	3.20	0.09	2.17	0.09	15.6
SFH4010M24	◎※★	24(18.0~26.5)	0.06	1.44	7500	10.22	0.29	5.76	0.23	30.5
SFH4010H24	◎※★	24(18.0~26.5)	0.08	1.92	8000	11.29	0.32	6.49	0.26	33.4

★產品詳細數據及功能請參閱承認書 Product have a detail in the approval sheet.

★產品規格變更不另行通知 Specifications are subject to change without notice.

⊗ Bearing System ◎ : Ball ※ : Sleeve ★ : WRB Bearing