






DC Axial Fan

TRF3628 B SERIES 36X36X28mm



- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball Bearing
軸承：※含油 ◎滾珠軸承
- Unit Weight : 54g
風扇單體重量：54克

P&Q Curve At Rated Voltage

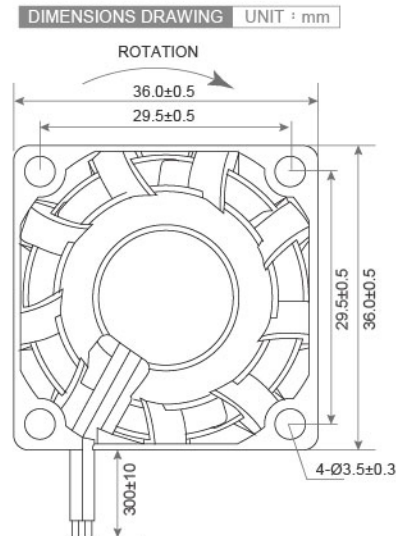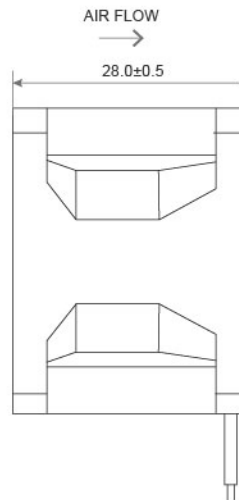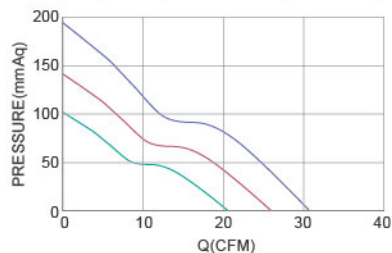

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRF3628x12SH	※◎	12 (9.5~13.2)	1.0	14.4	28500	20.4	0.57	101.97	4.01	64.5
TRF3628x12UH	※◎	12 (9.5~13.2)	1.4	20.4	32500	25.4	0.72	142.76	5.62	67.5
TRF3628x12XH	※◎	12 (9.5~13.2)	2.1	25.2	36500	30.5	0.86	193.74	7.63	70.5
TRF3628x24SH	※◎	24 (13.5~26.0)	0.5	14.4	28500	20.4	0.57	101.97	4.01	64.5
TRF3628x24UH	※◎	24 (13.5~26.0)	0.7	20.4	32500	25.4	0.72	142.76	5.62	67.5
TRF3628x24XH	※◎	24 (13.5~26.0)	1.1	25.2	36500	30.5	0.86	193.74	7.63	70.5