



DC Axial Fan

TRF3828 A SERIES 38X38X28mm



- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ◎Two Ball Bearing
軸承：※含油，◎滾珠軸承
- Unit Weight : 48g
風扇單體重量：48克

P&Q Curve At Rated Voltage

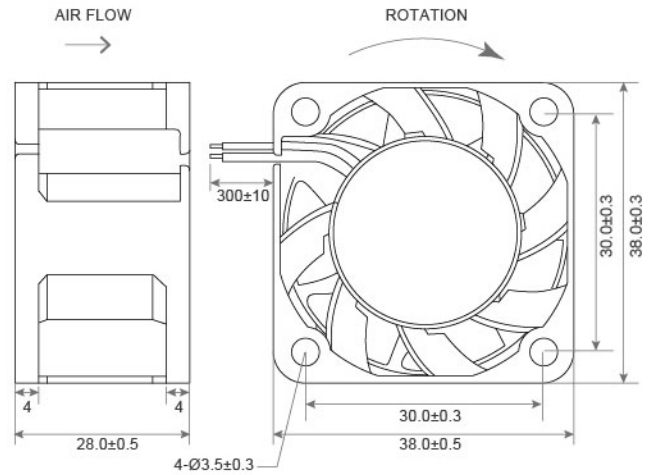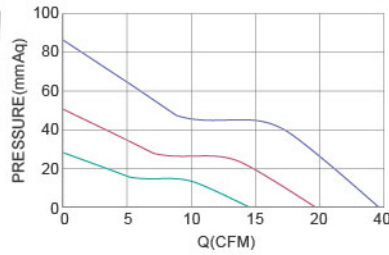

Model No.	Bearing Type	Voltage (VDC)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m ³ /min)	Air Pressure (mmH ₂ O)	Air Pressure (Inch H ₂ O)	Noise (dBA)
TRF3828x12SH	※◎	12 (9.5~13.2)	0.35	4.2	14000	14.08	0.40	28.04	1.10	52.0
TRF3828x12UH	※◎	12 (9.5~13.2)	0.75	9.0	19000	19.36	0.55	53.34	2.10	58.0
TRF3828x12XH	※◎	12 (9.5~13.2)	1.30	15.6	24000	24.29	0.69	85.30	3.36	66.0
TRF3828x24SH	※◎	24 (13.5~26.0)	0.18	4.2	14000	14.08	0.40	28.04	1.10	52.0
TRF3828x24UH	※◎	24 (13.5~26.0)	0.38	9.0	19000	19.36	0.55	53.34	2.10	58.0
TRF3828x24XH	※◎	24 (13.5~26.0)	0.55	15.6	24000	24.29	0.69	85.30	3.36	66.0

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. ■ A12