

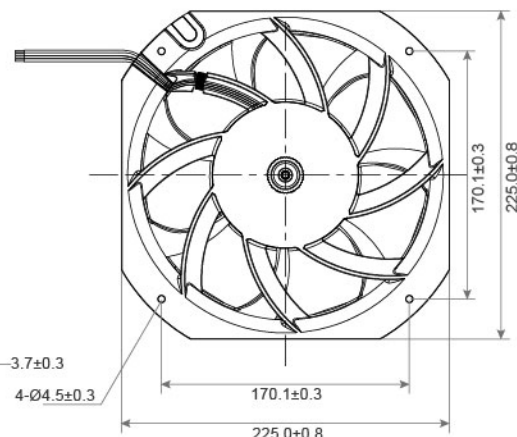


EC Axial Fan

TRT22580 FD SERIES 225X225X80mm

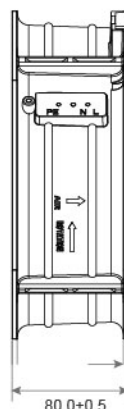

- Frame : Thermoplastic PBT UL94-V0
外框材質：環保防火PBT
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※ Sleeve · ◎ Two Ball Bearing
軸承結構：※含油軸承 · ◎滾珠軸承
- Weight : 1290g
風扇單體重量：1290克

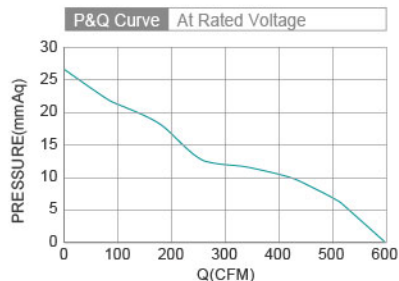



Model No.	Bearing Type	Voltage (VAC)	Frequency (HZ)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRT22580x11M	◎	110 (100~135)	50 / 60	60.0	3200	599	17.01	26.72	1.05	59.0
TRT22580x22M	◎	220 (200~245)	50 / 60	60.0	3200	599	17.01	26.72	1.05	59.0

EC Axial Fan

TRT22580 FD SERIES 225X225X80mm



- Frame : Aluminum
外框材質：鋁框
- Impeller : Thermoplastic PBT UL94-V0
扇葉材質：環保防火PBT
- Bearing : ※ Sleeve · ◎ Two Ball Bearing
軸承結構：※含油軸承 · ◎滾珠軸承
- Weight : 2100g
風扇單體重量：2100克

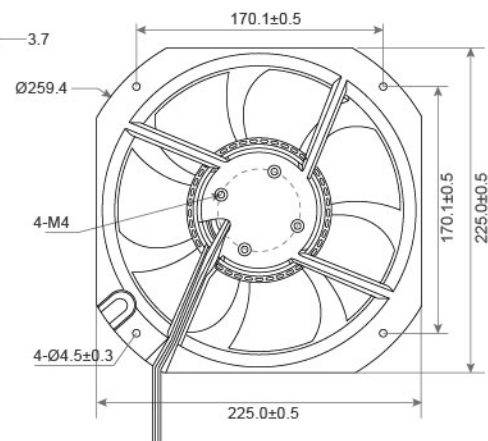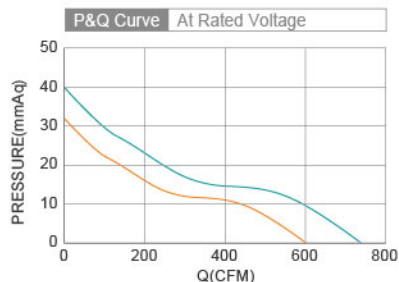

Model No.	Bearing Type	Voltage (VAC)	Frequency (HZ)	Power (W)	Speed (RPM)	Air Flow (CFM)	Air Flow (m³/min)	Air Pressure (mmH₂O)	Air Pressure (Inch H₂O)	Noise (dBA)
TRT22580x12M	◎	110~220 (90~245)	50 / 60	60.0	3000	595.0	16.89	32.50	1.28	60.0
TRT22580x12H	◎	110~220 (90~245)	50 / 60	95.0	4000	745.0	21.15	40.60	1.60	64.0
TRT22580x12VH	◎	110~220 (90~245)	50 / 60	105.0	4300	803.0	22.81	45.21	1.78	66.0

⊗ Bearing System ※ : Sleeve ★ : WRB ◎ : Ball

★如果您需要的轉速或電壓或功能不在這份清單上，請與我們業務聯繫 Please contact us, if the SPEC you need is not in the list.

★產品詳細數據及功能請參閱承認書 Please see the approval sheet for more information . ★產品規格變更不另行通知 Specifications are subject to change without notice. F21